


Product description Bayonet female cable connector, Contacts: 7, 6.0 - 8.0 mm, unshielded, solder, IP40

Area Bayonet series 678
Order number 99 0622 02 07


Illustration



Scale drawing

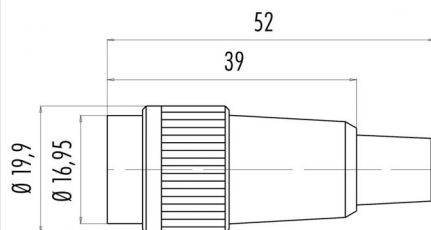

Contact arrangement (Plug-in side)



You can find the component part drawing on the next page.

Technical data

General features

Order number	99 0622 02 07
Connector design	female cable connector
Version	connector female straight
Connector locking system	Bayonet
Termination	solder
Degree of protection	IP40
Cross-sectional area	max. 0.75 mm ² / max. AWG 18
Cable outlet	6.0 - 8.0 mm
Temperature range from/to	-40 °C / 85 °C
Mechanical operation	> 500 Mating cycles
Weight (g)	9.376
Customs tariff number	85369010

Electrical parameters

Rated voltage	125 V
Rated impulse voltage	800 V
Rated current (40 °C)	5 A
Insulation resistance	≥ 10 ¹⁰ Ω
Pollution degree	I
Overvoltage category	I
Insulating material group	III
EMC compliance	unshielded

Material

Housing material	PA
Contact body material	PBT (UL94 V-0)
Contact material	CuSn (bronze)
Contact plating	Ag (silver)
REACH SVHC	None (No pollutants)

Classifications

eCl@ss 11.1	27-44-01-02
ETIM 7.0	EC002635


Declarations of conformity

Low Voltage Directive	2014/35/EU (EN 60204-1:2018; EN 60529:1991)
-----------------------	---

Product description Bayonet female cable connector, Contacts: 7, 6.0 - 8.0 mm, unshielded, solder, IP40

Area Bayonet series 678
Order number 99 0622 02 07

Component part drawing

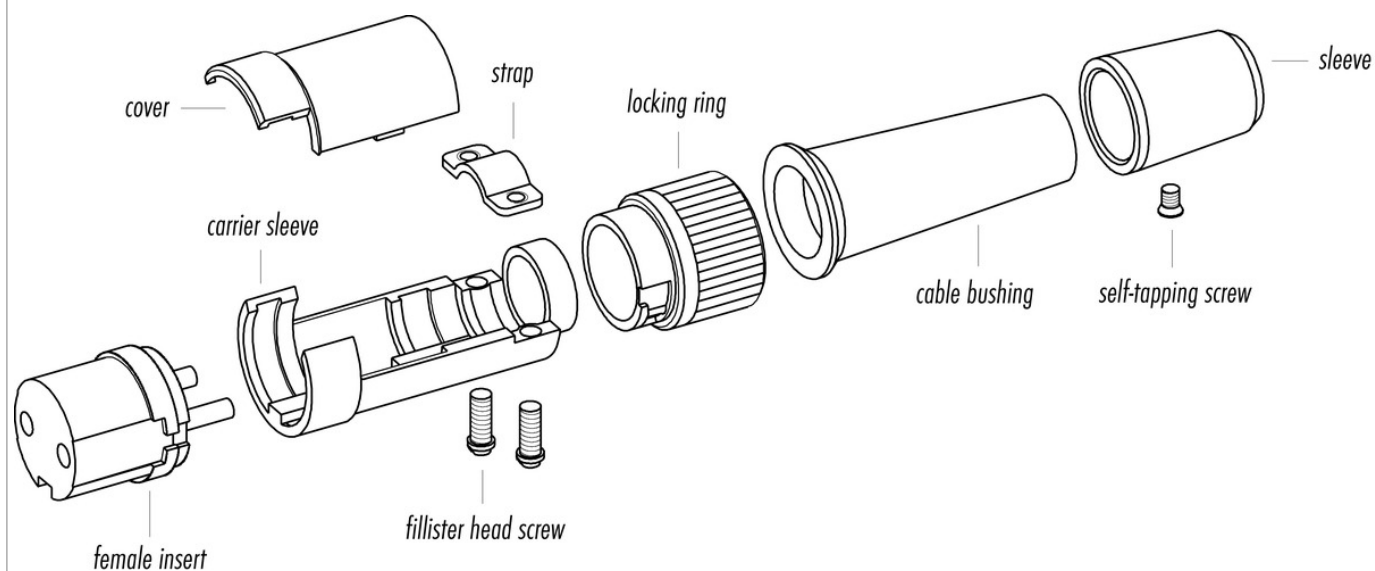

Product description	Bayonet female cable connector, Contacts: 7, 6.0 - 8.0 mm, unshielded, solder, IP40
Area	Bayonet series 678
Order number	99 0622 02 07

Security notices

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

Connectors which are used in circuits with voltages dangerous to the touch may only be installed and used by, or under the supervision of, persons with electrical engineering training, taking into account the applicable regulations and standards.