

# M23-5ES198A9L24S - Coupler connector



1628844

<https://www.phoenixcontact.com/nl/products/1628844>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



M23, Coupler connector, series: M23 PRO, straight, shielded: yes, for standard and ONECLICK fast locking system, No. of pos.: 5+PE, contact connection type: Socket, Crimp connection, cable diameter range: 9.5 mm ... 14.5 mm, coding: N, Item is lead-free in accordance with RoHS II without Exemption 6c (Pb < 0.1 %)

The figure shows the product with assembled crimp contacts. Please order crimp contacts separately.

## Your advantages

- Solutions with cross-manufacturer compatibility for standard and fast locking systems
- Modern, consistent design for highly convenient operation
- Easy, cost-effective cable assembly: uniform shielding of M17 to M40

## Commercial data

|                                      |               |
|--------------------------------------|---------------|
| Item number                          | 1628844       |
| Packing unit                         | 1 pc          |
| Minimum order quantity               | 1 pc          |
| Sales key                            | ABRBBG        |
| Product key                          | ABRBBG        |
| GTIN                                 | 4055626763286 |
| Weight per piece (including packing) | 130,9 g       |
| Weight per piece (excluding packing) | 115,574 g     |
| Customs tariff number                | 85366990      |
| Country of origin                    | DE            |

# M23-5ES198A9L24S - Coupler connector



1628844

<https://www.phoenixcontact.com/nl/products/1628844>

## Technical data

### Notes

|                    |                                            |
|--------------------|--------------------------------------------|
| Order information: | Order crimp contacts 6 x Ø 2 mm separately |
| Notes on operation | Please observe the derating curve.         |

### Safety note

|             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Safety note | WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.                                                                                                                                                                                                                                                                                                                                 |
|             | <ul style="list-style-type: none"><li>• WARNING: Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible.</li></ul>                                                                                                                                                                                                                    |
|             | <ul style="list-style-type: none"><li>• WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.</li></ul> |
|             | <ul style="list-style-type: none"><li>• The products are suitable for applications in plant, controller, and electrical device engineering.</li></ul>                                                                                                                                                                                                                                                                                                                              |
|             | <ul style="list-style-type: none"><li>• When operating the connectors in outdoor applications, they must be separately protected against environmental influences.</li></ul>                                                                                                                                                                                                                                                                                                       |
|             | <ul style="list-style-type: none"><li>• Assembled products may not be manipulated or improperly opened.</li></ul>                                                                                                                                                                                                                                                                                                                                                                  |
|             | <ul style="list-style-type: none"><li>• Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at <a href="https://www.phoenixcontact.com/products">phoenixcontact.com/products</a>).</li></ul>                                                                                                                                                                                       |
|             | <ul style="list-style-type: none"><li>• When using the product in direct connection with third-party manufacturers, the user is responsible.</li></ul>                                                                                                                                                                                                                                                                                                                             |
|             | <ul style="list-style-type: none"><li>• For operating voltages &gt; 50 V AC, conductive connector housings must be grounded</li></ul>                                                                                                                                                                                                                                                                                                                                              |
|             | <ul style="list-style-type: none"><li>• Ensure that the protective or functional ground has been properly connected.</li></ul>                                                                                                                                                                                                                                                                                                                                                     |
|             | <ul style="list-style-type: none"><li>• VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector</li></ul>                                                                                                                                                                                                                                                                                            |
|             | <ul style="list-style-type: none"><li>• Only use tools recommended by Phoenix Contact</li></ul>                                                                                                                                                                                                                                                                                                                                                                                    |
|             | <ul style="list-style-type: none"><li>• The installation notes/Design In documents online on the download page at <a href="https://www.phoenixcontact.com/products">phoenixcontact.com/products</a> must be observed for this product.</li></ul>                                                                                                                                                                                                                                   |
|             | <ul style="list-style-type: none"><li>• Operate the connector only when it is fully plugged in and interlocked.</li></ul>                                                                                                                                                                                                                                                                                                                                                          |

|             |                                                                                                                                                                                     |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Safety note | <ul style="list-style-type: none"><li>• Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.</li></ul> |
|             | <ul style="list-style-type: none"><li>• Observe the minimum bending radius of the cable. Lay the cable without twisting it.</li></ul>                                               |

|             |                                                                                                                                                                                 |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Safety note | <ul style="list-style-type: none"><li>• The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to</li></ul> |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

# M23-5ES198A9L24S - Coupler connector



1628844

<https://www.phoenixcontact.com/nl/products/1628844>

warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12).

## Product properties

|                |         |
|----------------|---------|
| Product family | M23 PRO |
|----------------|---------|

## Connector

### Insulating body

|                                                        |                                                               |
|--------------------------------------------------------|---------------------------------------------------------------|
| Note                                                   | Order information: Order crimp contacts 6 x Ø 2 mm separately |
| Coding                                                 | N                                                             |
| Material (Insulating body)                             | PA 6.6                                                        |
| Insertion/withdrawal cycles                            | 100                                                           |
| Connection method                                      | Crimp connection                                              |
| Contact switching type                                 | Socket                                                        |
| Application                                            | Power                                                         |
| Number of positions                                    | 6                                                             |
| Connection profile                                     | 5+PE                                                          |
| Installation height                                    | 3000 m                                                        |
| Number Contact (Contact group 1)                       | 6                                                             |
| Diameter Contact (Contact group 1)                     | 2 mm                                                          |
| Litz wire cross-section min. Contact (Contact group 1) | 0.25 mm <sup>2</sup>                                          |
| Litz wire cross-section max. Contact (Contact group 1) | 4 mm <sup>2</sup>                                             |
| Rated current Contact (Contact group 1)                | 30 A (for max. connection cross section)                      |
| Rated voltage Contact (Contact group 1)                | 630 V                                                         |
| Rated surge voltage                                    | 6 kV                                                          |
| Overvoltage category                                   | III                                                           |
| Degree of pollution                                    | 3                                                             |

### Housing

|                                   |                                               |
|-----------------------------------|-----------------------------------------------|
| Type                              | Coupling housing                              |
| Thread type                       | M23                                           |
| Design                            | straight                                      |
| Type of locking                   | for standard and ONECLICK fast locking system |
| Pg screw connection               | none                                          |
| Housing material                  | GD-Zn                                         |
| Degree of protection (plugged in) | IP66/IP68 (2 m / 24 h)                        |

### Seal

|                         |                    |
|-------------------------|--------------------|
| External cable diameter | 9.5 mm ... 14.5 mm |
| Seal material           | FKM                |

## Environmental and real-life conditions

### Ambient conditions

|                                 |                                     |
|---------------------------------|-------------------------------------|
| Ambient temperature (operation) | -40 °C ... 105 °C (see to derating) |
|---------------------------------|-------------------------------------|

# M23-5ES198A9L24S - Coupler connector




1628844

<https://www.phoenixcontact.com/nl/products/1628844>

|                       |                                    |
|-----------------------|------------------------------------|
| Altitude              | 2000 m                             |
| Permanent temperature | 125 °C (DIN EN 60512-9-2 / 1000 h) |

## Drawings

Schematic diagram

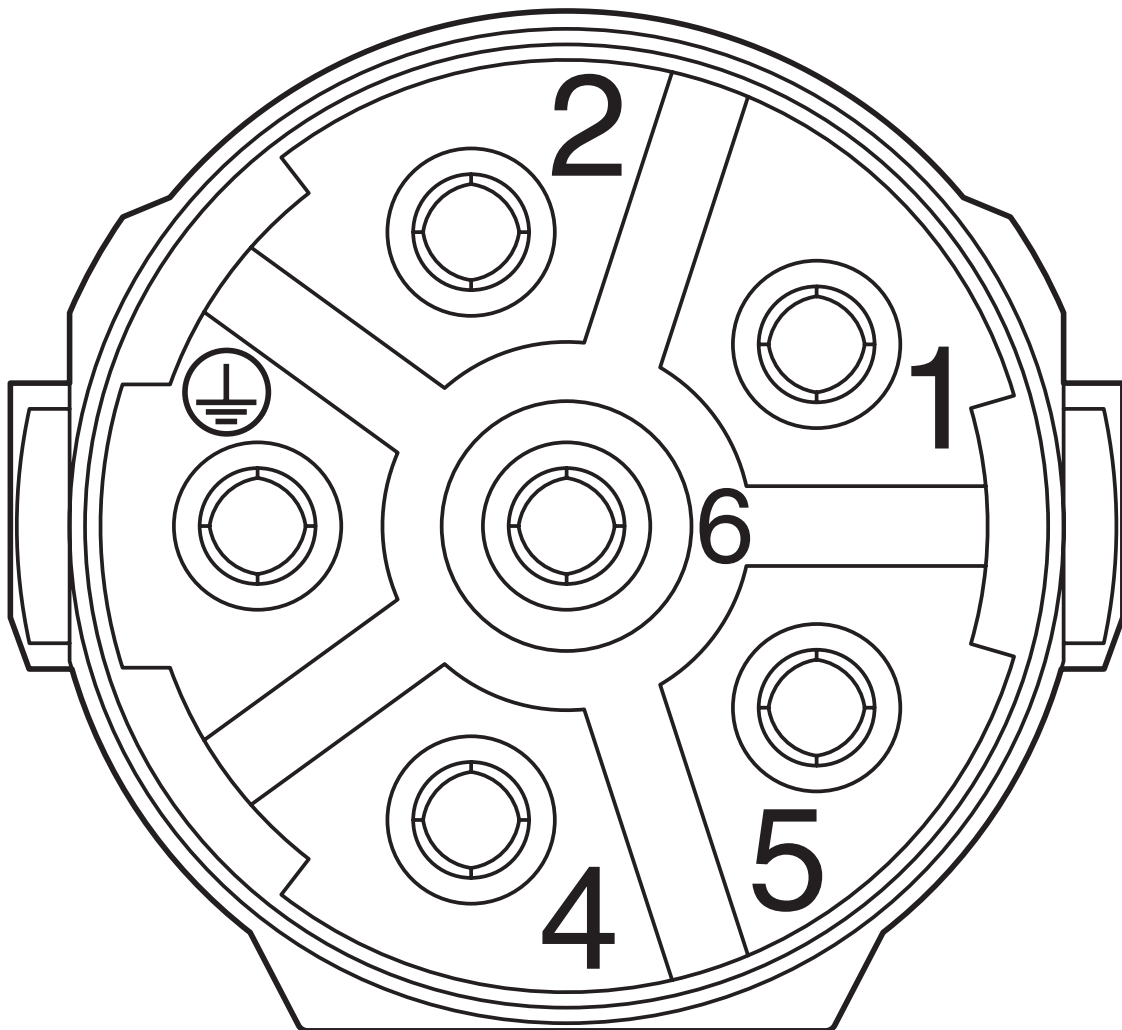


Connector pin assignment

# M23-5ES198A9L24S - Coupler connector

1628844

<https://www.phoenixcontact.com/nl/products/1628844>

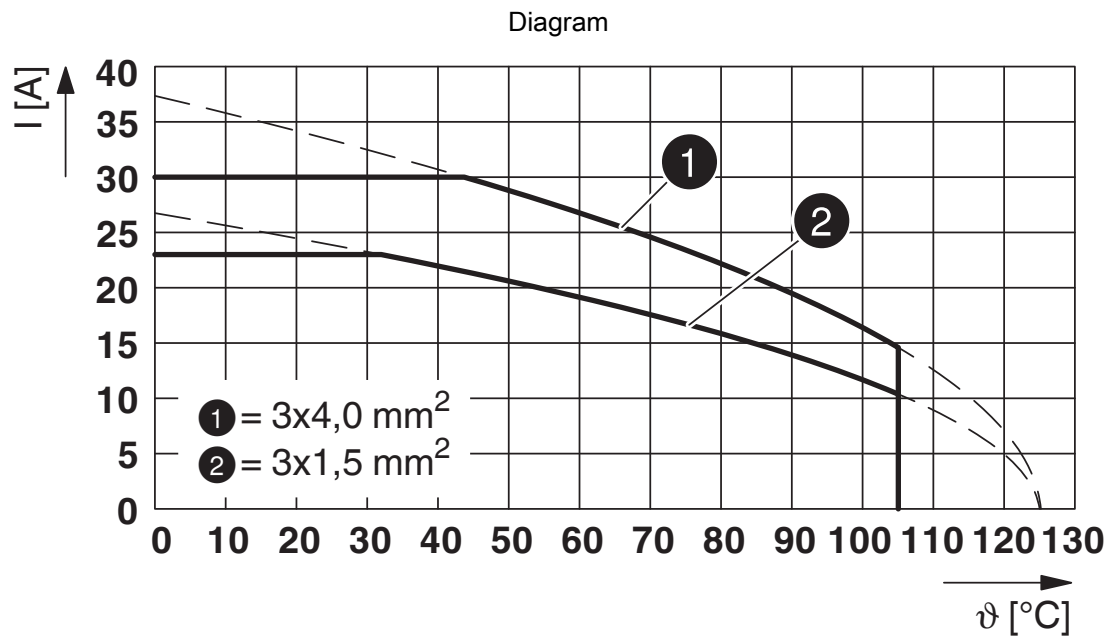

$I$  = current strength,  $\vartheta$  = ambient temperature,  $3 \times 30 \text{ A}$  (curve 1),  $3 \times 24 \text{ A}$  (curve 2)

# M23-5ES198A9L24S - Coupler connector



1628844

<https://www.phoenixcontact.com/nl/products/1628844>

## Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/nl/products/1628844>



**UL Listed**

Approval ID: E468743-20190627



**cUL Listed**

Approval ID: E468743-20190627

# M23-5ES198A9L24S - Coupler connector



1628844

<https://www.phoenixcontact.com/nl/products/1628844>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-13.0 | 27440116 |
| ECLASS-15.0 | 27440116 |

### ETIM

|           |          |
|-----------|----------|
| ETIM 10.0 | EC002635 |
|-----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

# M23-5ES198A9L24S - Coupler connector



1628844

<https://www.phoenixcontact.com/nl/products/1628844>

## Environmental product compliance

### EU RoHS

|                                         |                    |
|-----------------------------------------|--------------------|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|-----------------------------------------|--------------------|

### China RoHS

|                                        |                                          |
|----------------------------------------|------------------------------------------|
| Environment friendly use period (EFUP) | EFUP-E                                   |
|                                        | No hazardous substances above the limits |

### EU REACH SVHC

|                                     |                            |
|-------------------------------------|----------------------------|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |
|-------------------------------------|----------------------------|

Phoenix Contact 2026 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT B.V.  
Hengelder 56 6902 PA Zevenaar  
Postbus 246 6900 AE Zevenaar  
(0316) 59 17 20  
[sales@phoenixcontact.nl](mailto:sales@phoenixcontact.nl)