

Three-phase Line Reactor for Motor Drive Applications



- Provision of 4% impedance
- Reduction of mains harmonics
- Reduction of commutation notches
- Protection of motor drive electronics
- Limitation of inrush currents
- Improvement of true power factor


Approvals



Technical specifications

Maximum continuous operating voltage:	3x 500/288VAC
Operating frequency:	50 to 60Hz
Rated currents:	4 to 1100A @ 40°C
Impedance (uk):	4% @ 400VAC, 50Hz & rated current
Typical harmonics reduction:	See table on next page
High potential test voltage:	P → E 3000VAC for 3 sec P → P 3000VAC for 3 sec
Protection category:	IP00 (KL types according to VBG 4)
Overload capability:	2x rated current at switch on for 30 seconds 1.5x rated current for 1 minute, once per hour
Temperature range (operation and storage):	-25°C to +100°C (25/100/21)
Insulation class:	T40/F (155°C)
Flammability corresponding to:	UL 94V-2 or better
Design corresponding to:	EN 61558-2-20 (VDE 0570-2-20), UL508C, CSA C22.2 NO.14
MTBF @ 40°C/400V (Mil-HB-217F):	>200,000 hours

Typical electrical schematic

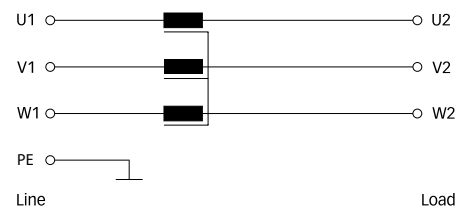




Features and benefits

- Ensure reliability, performance and a long service life of electrical consumers.
- Reduction of mains harmonics and commutation notches.
- Help to meet international power quality standards such as IEEE 519 or EN 61000-3-2.
- Protection of motor drive electronics and dc link capacitors against mains transients.
- Reduction of inrush and peak currents.
- Reduction of conducted LF emission.
- Improvement of conducted LF immunity.
- Prevention from nuisance tripping caused by power line voltage spikes.
- Improvement of true power factor.

Typical applications

- Motor drives and various adjustable speed drive systems, such as:
 - Elevators
 - Robots
 - Machinery
 - Process automation equipment

Reactor selection table

Reactor	Rated current @ 40°C	Typical drive power rating*	Nominal inductance	Typical power loss**	Input/Output connections			Total	Cu.	Weight Al.
	[A]	[kW]	[mH]	[W]				[kg]	[kg]	[kg]
RWK 212-4-KL	4	1.5	7.3	23	KL			2.1	0.21	
RWK 212-7-KL	7	3	4.2	36	KL			2.5	0.31	
RWK 212-11-KL	11	4	2.6	37	KL			2.5	0.7	
RWK 212-16-KL	16	7.5	1.8	59	KL			3.9	0.85	
RWK 212-21-KL	21	11	1.4	66	KL			5.4	0.95	
RWK 212-29-KL	29	15	1	69	KL			5.4	1.63	
RWK 212-35-KL	35	18.5	0.84	70	KL			5.9	2.25	
RWK 212-46-KL	46	22	0.64	99	KL			11	2.3	
RWK 212-60-KL	60	30	0.49	138	KL			15	2.35	
RWK 212-75-KL	75	37	0.39	133	KL			15	3.7	
RWK 212-95-KL	95	45	0.3	166	KL			22	3.4	
RWK 212-124-KS	124	55	0.23	172		KS		25	3.4	
RWK 212-156-KS	156	75	0.19	249		KS		25	5.1	
RWK 212-182-KS	182	90	0.16	245		KS		32	7.45	
RWK 212-230-KS	230	110/132	0.13	301		KS		35	9.55	
RWK 212-280-KS	280	160	0.1	335		KS		41	8.5	
RWK 212-330-KS	330	160	0.09	386		KS		56	9.25	
RWK 212-400-S	400	200	0.073	692			S	57	3.4	4.7
RWK 212-500-S	500	250	0.058	761			S	67	4.5	5.74
RWK 212-600-S	600	315	0.049	825			S	76	4.5	6.6
RWK 212-680-S	680	355	0.043	876			S	80	5.6	8
RWK 212-790-S	790	400	0.037	956			S	90	6.8	8.7
RWK 212-910-S	910	450	0.032	1022			S	107	6.8	8.7
RWK 212-1100-S	1100	630	0.026	1096			S	138	9.2	9.6

Customized line reactors with different electrical and mechanical specifications are available on request.

* Calculated at rated current, 400VAC and cos phi = 0.8. The exact value depends upon the efficiency of the drive, the motor and the entire application.

** Power loss at 25°C/50Hz, considering a typical harmonic spectrum of a motor drive with 6u rectifier bridge.

Harmonics reduction

Line reactors are a cost-effective way for the limitation of mains harmonics. The harmonics reduction capability is related to the reactor impedance. A higher impedance translates directly into lower harmonic

currents, but of course also into a larger component with a higher voltage drop – and vice versa. 4% impedance reactors like RWK 212 provide an excellent cost/benefit ratio and are

particularly beneficiary in the most diverse motor drive applications. The table below shows various reactor impedance values and their calculated effect in terms of harmonics reduction.


Harmonic number / Input impedance (uk) vs. remaining harmonics [%]

	0.5%	1%	2%	3%	4%	5%	6%	7%	8%	9%	10%
5th	80	60	46	40	34	32	30	28	26	24	23
7th	60	37	22	16	13	12	11	10	9	8.3	7.5
11th	18	12	9	7.3	6.3	5.8	5.2	5	4.3	4.2	4
13th	10	7.5	5.8	4.9	4.2	3.9	3.6	3.3	3.15	3	2.8
17th	7.3	5.2	3.6	3	2.4	2.2	2.1	0.9	0.7	0.5	0.4
19th	6	4.2	2.8	2.2	2	0.8	0.7	0.4	0.3	0.25	0.2
%THID	102.5	72.2	52.3	44.13	37.31	34.96	32.65	30.35	28.04	25.92	24.68


Reading example: a 4% impedance reactor typically reduces the THID to ~37% of the fundamental.

Mechanical data


4 to 46A types

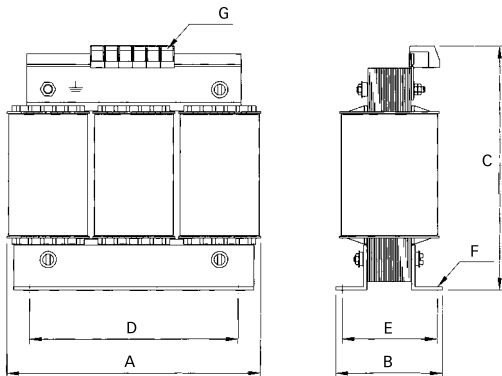


60 to 95A types

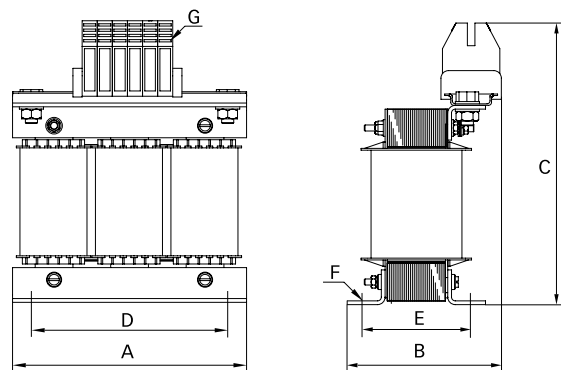

124 to 330A types

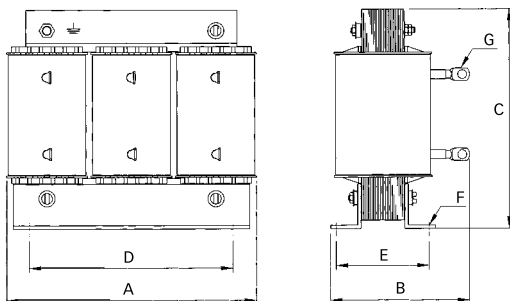

400 to 1100A types

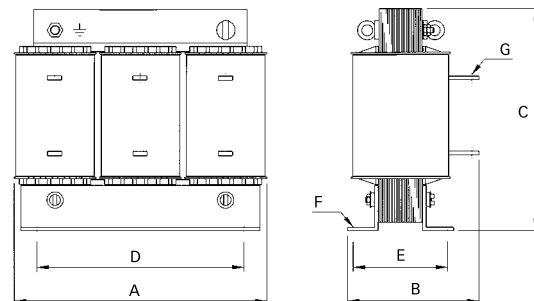

Dimensions

	A	B	C	D	E	F	G
4A	100	max. 70	max. 115	56	43	4.8 x 9	2.5mm ²
7 and 11A	125	max. 80	max. 130	100	55	5 x 8	2.5mm ²
16A	155	max. 80	max. 155	130	56.5	8 x 12	4mm ²
21A	155	max. 95	max. 155	130	70.5	8 x 12	4mm ²
29A	155	max. 95	max. 155	130	71.5	8 x 12	4mm ²
35A	155	max. 105	max. 170	130	70	8 x 12	10mm ²
46A	190	max. 120	max. 195	170	77.5	8 x 12	10mm ²
60A	210	max. 155	max. 240	175	97	8 x 12	16mm ²
75A	210	max. 160	max. 249	175	97	8 x 12	35mm ²
95A	230	max. 185	max. 275	180	122	8 x 12	35mm ²
124 and 156A	240	max. 210	max. 210	190	130	11 x 15	Ø10
182A	265	max. 210	max. 230	215	114	11 x 15	Ø10
230A	300	210	270	240	134	11 x 15	Ø12
280A	300	218	270	240	142	11 x 15	Ø12
330A	300	255	270	240	165	11 x 15	Ø12
400A	420	205	390	370	134	11 x 15	Ø11
500A	420	215	390	370	140	11 x 15	Ø14
600A	420	225	390	370	149	11 x 15	Ø14
680A	420	225	390	370	150	11 x 15	Ø14
790A	420	240	390	370	162	11 x 15	Ø18
910A	420	255	390	370	177	11 x 15	2 x Ø11
1100A	420	290	390	370	200	11 x 15	2 x Ø11

All dimensions in mm; 1 inch = 25.4mm
Tolerances according: ISO 2768-m / EN 22768-m

**Headquarters and
global innovation and
development center**

Schaffner Group
Nordstrasse 11
4542 Luterbach
Switzerland
T +41 32 681 66 26
F +41 32 681 66 30
info@schaffner.ch
www.schaffner.com

Sales and application centers

China
Schaffner EMC Ltd. Shanghai
Building 11, Lane 1365
East Kangqiao Road
Shanghai 201319
T +86 21 6813 9855
F +86 21 6813 9811
cschina@schaffner.com
www.schaffner.com

Germany
Schaffner Deutschland GmbH
Schoemperlenstrasse 12B
76185 Karlsruhe
T +49 721 56910
F +49 721 569110
germanysales@schaffner.com

Finland
Schaffner Oy
Tynninkuja 7
08700 Lohja
T +358 19 35 72 71
F +358 19 32 66 10
finlandsales@schaffner.com

France
Schaffner EMC S.A.S.
112, Quai de Bezons
95103 Argenteuil
T +33 1 34 34 30 60
F +33 1 39 47 02 28
francesales@schaffner.com

Italy
Schaffner EMC S.r.l.
Via Galileo Galilei, 47
20092 Cinisello Balsamo (MI)
T +39 02 66 04 30 45/47
F +39 02 61 23 943
italysales@schaffner.com

Japan
Schaffner EMC K.K.
Mitsui-Seimei Sangenjaya Bldg. 7F
1-32-12, Kamiyama, Setagaya-ku
Tokyo 154-0011
T +81 3 5712 3650
F +81 3 5712 3651
japansales@schaffner.com
www.schaffner.jp

Sweden
Schaffner EMC AB
Turebergstorg 1, 6
19147 Sollentuna
T +46 8 5792 1121/22
F +46 8 92 96 90
swedensales@schaffner.com

Switzerland
Schaffner EMV AG
Nordstrasse 11
4542 Luterbach
T +41 32 681 66 26
F +41 32 681 66 41
sales@schaffner.ch

Singapore
Schaffner EMC Pte Ltd.
Blk 3015A Ubi Road 1
05-09 Kampong Ubi Industrial
Estate
T +65 6377 3283
F +65 6377 3281
singaporesales@schaffner.com

Spain
Schaffner EMC España
Calle Caléndula 93,
Miniparc III, Edificio E
El Soto de la Moraleja,
Alcobendas
28109 Madrid
T +34 618 176 133
spainsales@schaffner.com

Taiwan
Schaffner EMV Ltd.
6th Floor, No 413
Rui Guang Road
Neihu District
Taipei City 114
T +886 2 87525050
F +886 2 87518086
taiwansales@schaffner.com

Thailand
Schaffner EMC Co. Ltd.
Northern Region Industrial Estate
67 Moo 4 Tambon Ban Klang
Amphur Muang P.O. Box 14
Lamphun 51000
T +66 53 58 11 04
F +66 53 58 10 19
thailandsales@schaffner.com

UK
Schaffner Ltd.
5 Ashville Way
Molly Millars Lane
Wokingham
Berkshire RG41 2PL
T +44 118 9770070
F +44 118 9792969
uksales@schaffner.com
www.schaffner.uk.com

USA
Schaffner EMC Inc.
52 Mayfield Avenue
Edison, New Jersey 08837
T +1 732 225 9533
F +1 732 225 4789
usasales@schaffner.com
www.schaffner.com/us

To find your local partner within
Schaffner's global network, please go to

www.schaffner.com

May 2011

© 2011 Schaffner EMC.
Specifications subject to change without
notice. All trademarks recognized.

Schaffner is an ISO-registered company.
Its products are designed and manufac-
tured under the strict quality and environ-
mental requirements of the ISO 9001 and
ISO 14001 standards.

This document has been carefully
checked. However, Schaffner does not
assume any liability for errors or inac-
curacies.