


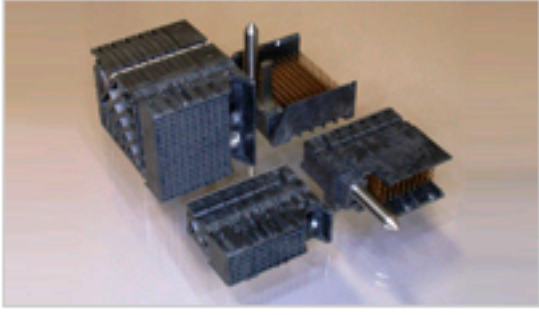

# 2143632-1 Product Details

[Share](#) | [Print](#) | [Email](#)


Preliminary

## Impact High Density Backplane Connectors

IMP100,O,H,V5P12C,UG,REW46

**2143632-1**

TE Internal Number: 2143632-1

### Product Highlights [View All](#)

- Connector Style = Header
- 120/Signal, 60/Ground
- 180 Positions
- Header Type = Partially Shrouded
- Board-to-Board Configuration = Orthogonal, Vertical

[Pricing & Availability](#)
[Request Sample](#)
[Add to My Part List](#)
[Buy Product through Distributor](#)
[Feedback](#)
[Documents](#)
[Features](#)
[Compliance](#)

#### Please Note:

Use the Product Drawing for all design activity

Product Type Features	
PCB Mount Retention Type	Action/Compliant Tail
PCB Mount Alignment Type	None
Electrical Characteristics	
Impedance (Ω)	100
Operating Voltage Reference	AC/DC
Operating Voltage (VAC)	120
Operating Voltage (VDC)	120
Dimensions	
Tail Length (mm [in])	1.2 [0.047]
Length (X-Axis) (mm [in])	25.55 [1.006]
Width (Z-Axis) (mm [in])	24.80 [0.9763]
Profile Height (Y-Axis) (mm [in])	11.95 [0.470]
PCB Hole Diameter (mm [in])	0.46 [0.018]
Body Features	
Header Type	Partially Shrouded
Contact Features	
Contact Type	Pin
Contact Length (mm [in])	4.50 [0.177]
Contact Plating, Termination Area, Material	Matte Tin
Contact Plating, Termination Area, Thickness (μm [μin])	1.27 [50]
Contact Base Material	Copper-Nickel-Silicon
Underplate Material	Nickel
Underplate Material Thickness (μm [μin])	1.27 [50.000]
Housing Features	
Connector Style	Header
End Wall Location	Right
Housing Color	Black
Housing Material	LCP (Liquid Crystal Polymer)

Configuration Features	
Connector Contact Configuration (No. of Pos./Type)	120/Signal, 60/Ground
Number of Positions	180
Number of Differential Pairs Per Column	5
Number of Columns	12
Number of Rows	15
Shrouded	Yes - Partial
Guide Location	Unguided
Tail Orientation	In-line

Industry Standards	
RoHS/ELV Compliance	Not reviewed for ELV/RoHS compliance
Lead Free Solder Processes	Not reviewed for lead free solder process
UL Rating	Recognized
UL File Number	E28476
UL Flammability Rating	UL 94V-0
CSA Certified	Yes

Environmental	
Operating Temperature (°C [°F])	-55 - +85 [-67 - +185]

Conditions for Usage	
Board-to-Board Configuration	Orthogonal, Vertical

Operation/Application	
Industry Application	Networking (Communications)

Packaging Features	
Packaging Method	Tube/Box

Other	
Brand	TE Connectivity

### Related Products

Not quite the product you're looking for?

[Find Similar Products](#)

[View Part in Product Feature Selector](#)

[Check for Tooling](#)

#### Corporate Information

- [About TE](#)
- [Investors](#)
- [News Room](#)
- [Supplier Portal](#)
- [Careers](#)
- [Terms & Conditions](#)
- [Privacy Policy](#)
- [Global Accessibility Statement](#)

#### Quick Links

- [Distributor Inventory](#)
- [Product Cross Reference](#)
- [Documents & Drawings](#)
- [Product Compliance Support Center](#)
- [Site Map](#)

#### Customer Support

- [Email or Chat With Us](#)
- [Find a Phone Number](#)
- [Knowledge Base](#)
- [Manage Your Account](#)

#### Keep Me Informed

