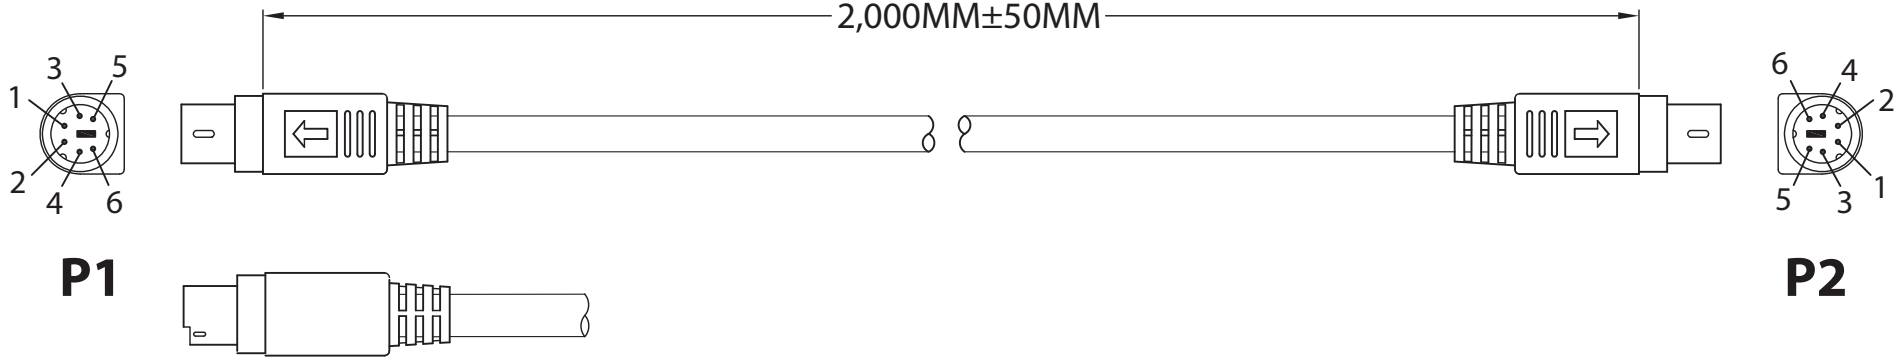

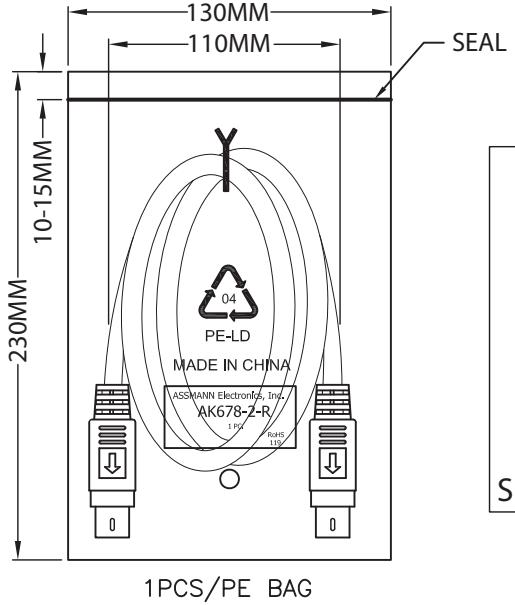

PIN ASSIGNMENT

P1		P2
1	BLACK	1
2	BROWN	2
3	RED	3
4	ORANGE	4
5	YELLOW	5
6	GREEN	6
SHELL	D	SHELL

Material:

- Cable: NOUL 28AWG*6C+D+AL/MY
  - ø5.0MM
  - Jacket Beige
- Connectors: Mini DIN 6 Pin Male
  - Solder Type
  - Insulator color: Black
  - Pin Tin-Plated
- Outter Jacket: PVC 40P (color Beige)
- Inner Jacket: Clear LD-PE

Electrical:

- 100% short, open, miswire test
- Conduct Resistance: 2Ω Max.
- Insulation Resistance: 10MΩ Min.
- Dielectric Test: 300V DC

RoHS Complaint

Scale	1:1
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	±3°

Modification	Date	Name

		Name
Drawn	01.03.12	Chappell
Approved		

ASSMANN WSW components

Item No. **AK678-2-R**

Title
PS/2 Connection Cable - Meters,
Beige, Min DIN 6 Pin Male <=> Min DIN 6 Pin Male

Drawing No. **rev00**

Replace | Sheet