


RFTNCAA4PFHMF Datasheet

Product Name // TNCA Plug Straight 4 Hole Flange RF Connector

 [View Product Page](#)

* Representative product image only

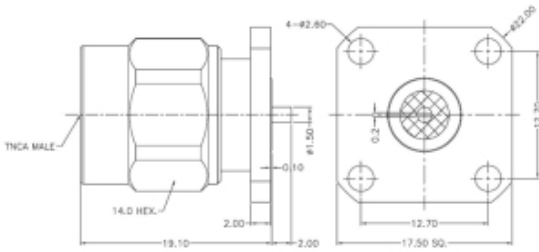

// Product Description:

- TNCA Plug Straight 4 Hole Flange RF Connector
 - Maximum Voltage: 500V
 - Temperature range: -65°C to +165°C
 - Frequency range: 0GHz - 11GHz
 - VSWR: <1.30
- Dielectric withstanding Voltage: >1500V
 - Impedance: 50Ohm
 - Body Material: Stainless Steel Passivation
 - Contact Material: Beryllium Copper

// General Information:

Product Display Title:	TNCA Series Pin without Extended PTFE 4 Hole Flange
Product Family:	Radio Frequency Connectors
Product Series:	TNCA Series
Body Length:	19.10mm
Body Material:	Stainless Steel Passivation
Centre Contact Retention Force:	>26.7N
Contact Pin Material:	Beryllium Copper
Min Coupling Torque:	0.80Nm
Max Coupling Torque:	1.10Nm
Dielectric Withstanding Voltage:	>1500V
Durability:	>500 cycles
Flange Mount Length:	17.50mm
Function:	Male Flange Mount RF Connector
Impedance:	50Ohm
Insulation Resistance:	>5000MOhm
Insulator:	Adapter ASTM D 1710
Max Operating Temperature:	+165°C
Min Operating Temperature:	-65°C
Mount Hole Distance:	12.70mm
Min Operating Frequency:	0GHz
Max Operating Frequency:	11GHz
Pin Diameter:	1.50mm
Pin Length:	2.00mm
Pin Slot Width:	0.20mm
Voltage Max:	500V
Vswr:	<1.30

// Product PDF Links

 [TNCA Series Product Datasheet](#)

// Product 3D CAD Model Links

 [RFTNCAA4PFHMF3D CAD Model](#)



Have a question or project enquiry
you'd like to talk to us about?



[Click Here To Contact Us](#)