


The D*BMA feed-thru bulkhead connector is used when it is desirable to connect and disconnect a cable on both sides of a bulkhead or panel. This connector can also be used as a connector saver in test equipment applications where more than normal mating and unmating would soon degrade a permanently mounted connector. It features the industry proven LITTLE CAESAR® rear release contact retention assembly, making it field repairable.

How to Order

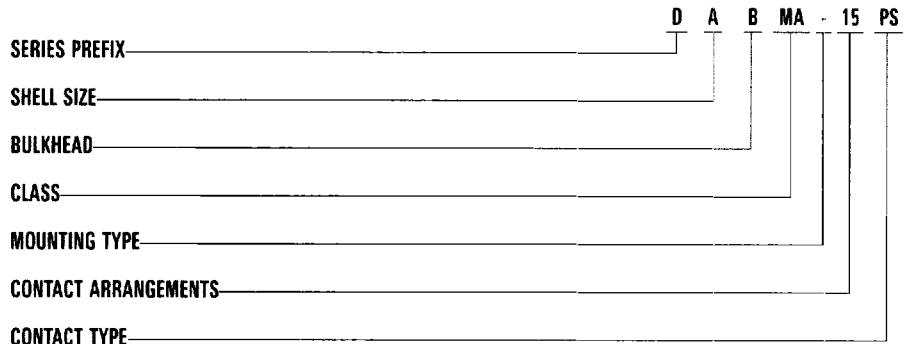

SERIES PREFIX
D – ITT Cannon Designation

SHELL SIZE
E, A, B, C and D

BULKHEAD
B


CLASS
MA – LITTLE CAESAR rear release contact retention assembly

MOUNTING TYPE
No designator – 120 (3.05) thru hole
N – #4-40 UNC-2B thru threads

CONTACT ARRANGEMENTS
9, 15, 25, 37 and 50 (See page 292)

CONTACT TYPE
PS – Pin/Socket

Shell Dimensions

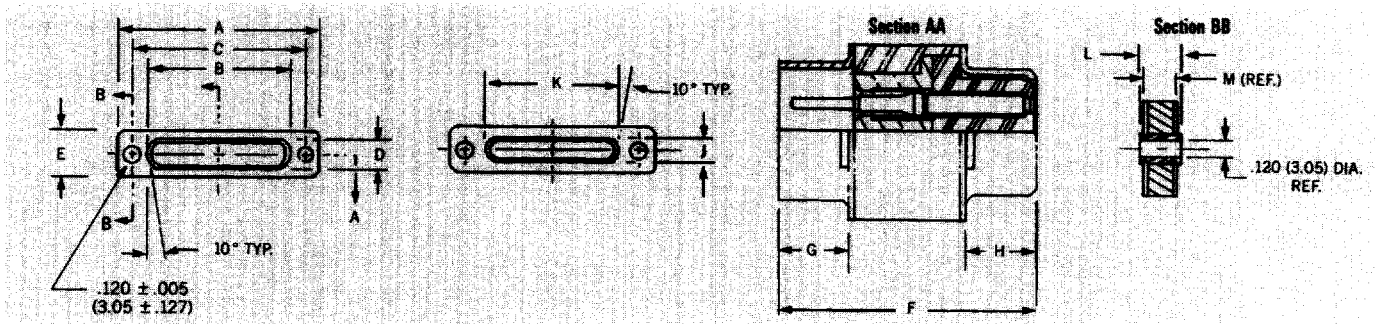

Part Number by Shell Size	A	B	C	D	E	F	G	H	J	K	L	M
DEBMA-9PS	±.015 (0.38)	±.010 (0.25)	±.005 (0.13)	±.010 (0.25)	±.015 (0.38)	±.010 (0.25)	±.010 (0.25)	±.010 (0.25)	±.010 (0.25)	±.010 (0.25)	±.015 (0.38)	±.010 (0.25)
DABMA-15PS	1.213(30.81)	.697(17.70)	.984(24.99)	.360(9.14)	.494(12.55)	.861(21.87)	.236(5.99)	.243(6.17)	.308(7.82)	.640(16.26)	.417(10.59)	.388(9.86)
DEBMA-25PS	1.541(39.14)	1.025(26.04)	1.312(33.32)	.360(9.14)	.494(12.55)	.861(21.87)	.236(5.99)	.243(6.17)	.308(7.82)	.968(24.59)	.417(10.59)	.388(9.86)
DEBMA-37PS	2.088(53.04)	1.583(40.21)	1.852(47.04)	.378(9.60)	.494(12.55)	.865(21.97)	.231(5.87)	.243(6.17)	.308(7.82)	1.508(38.30)	.417(10.59)	.388(9.86)
DEBMA-50PS	2.729(69.29)	2.231(56.67)	2.500(63.50)	.378(9.60)	.494(12.55)	.865(21.97)	.231(5.87)	.243(6.17)	.308(7.82)	2.156(54.76)	.417(10.59)	.388(9.86)
DEBMA-9PS	2.635(66.93)	2.127(54.03)	2.406(61.11)	.484(12.29)	.605(15.37)	.865(21.97)	.231(5.87)	.243(6.17)	.420(10.67)	2.062(52.37)	.417(10.59)	.388(9.86)