

Technical specification :

Rated voltage: 30 V
IEC 61076-2-104

Current rating: 1,5 A bei 40°C
IEC 61076-2-104

Insulation resistance: >=100 MΩ
IEC 60512

Pollution degree: 3/2
IEC 60664-1

Degree of protection: IP 67, in mated condition
IEC 60529

Temperature range: -30°C ... +80°C
EN 60512-11-10
-40°C ... +85°C
EN 60512-11-4

Mating cycles: >=100
IEC 60512-9a

Cable specification:

Temperatur range:
static -30°C ... +80°C
flexibel -15°C ... +80°C

Materials:

Contact: CuZn, Ni b / Au 0,2 gal.

Contact carrier: PA, UL 94 V-0

Sealing: FPM

Coupling nut: GD-Zn, Nickel plated

Moulding body: TPU, UL 94 HB, grey


Shielding bush: CuZn, Nickel plated

Installation specification:

Recommended torque: 0,4 Nm

Conec installation tool: Torque wrench: 36-000200
Insert across flats 9: 36-000210

Contact assignment:

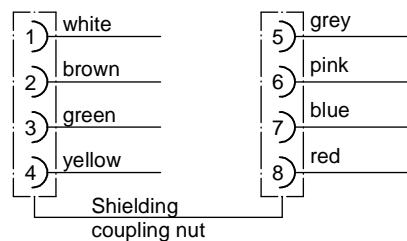

Part no:	Description:	Length L:	Cable:
42-12186	SAL - 8S - RK8 - 2 / G2	2m	TPU, UL 20549, black, 8x0,14mm ² Li9YFC11Y Cable: 781-G21800
42-12187	SAL - 8S - RK8 - 3 / G2	3m	
42-12188	SAL - 8S - RK8 - 5 / G2	5m	
42-12189	SAL - 8S - RK8 - 10 / G2	10m	
42-xxxxx	SAL - 8S - RK8 - ... / G2	x	

DO NOT ALTER CAD DRAWING BY HAND RoHS & REACH compliant	Index a: 28.05.2015 rch Ä5648 Data sheet changed	dim. in mm	title: Female connector M8x1 axial, 360°shielding	
		date name		
	tolerance of cable: L <= 4m: L + 40mm L > 4m: L + 1%	drawn 24.09.13 Christen	dwg no:	42K1A556
	general tolerance: 0 ± 0,50mm 0,0 ± 0,25mm 0,00 ± 0,10mm + ± 5°	appd. 24.09.13 Mankopf	part no:	
THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH		CONEC ®		