


1


ZONE	REV	DESCRIPTION	DATE	BY
-	L	ECO 21939	01.28.09	P.MAO

ZONE	REV	DESCRIPTION	DATE	BY
-	L	ECO 21939	01.28.09	P.MAO

2




3




4

P/N	INTERFACE(S)	Ø A	B	C
-1CC	FULL DETENT	.116	.090	.095
-2CC	LIMITED DETENT	.120	.090	.095
-3CC	SMOOTH BORE	.125	.090	.095
-4CC	FULL DETENT	.116	.050	.055
-5CC	LIMITED DETENT	.120	.050	.055
-6CC	SMOOTH BORE	.125	.050	.055

D



C



B

ENVIRONMENTAL:
Temperature Range: -65°C to +165°C.
Thermal Shock: Mil-Std-202, Method 107, Test Cond. C.
Moisture Resistance: Mil-Std-202, Method 106, except step 7b shall be omitted. Insulation resistance at least 1,000 MegOhms within 5 minutes after removal from humidity.
Corrosion: Mil-Std-202, Method 101, Test Cond. B.
Vibration: Mil-Std-202, Method 204, Test Cond. D.
Shock: Mil-Std-202, Method 213, Test Cond. I.

A

MATERIAL	DATE	PROCUREMENT
ATV	08.10.99	
P.MAO	08.10.99	

CARLISLE Interconnect Technologies
Long Beach, CA 90815

TITLE	SCALE	SUB-DIRECTORY/FILENAME	SHEET	REV.
SMP MALE, PCB EDGE MOUNT TO Ø .015 STRAIGHT TERMINATION	10:1	OLPXXX\OLP606	1	2
C 30990		P606		L

ENG-DWG REV. C 4

MATERIAL(S):

Body & Center Conductor:
BeCu alloy per ASTM B-196 or B 197.
Dielectric:
PTFE per ASTM D-1710.

ELECTRICAL:

Impedance: 50 Ohms nominal.
Frequency Range: DC to 18.0 GHz.
VSWR: 1.06 + .005 X f(GHz).
Insertion Loss: 0.10 dB max to 18.0 GHz.
Working Voltage: 335 Vrms max @ sea level.
65 Vrms max @ 70,000 ft.
Dielectric Withstanding Voltage: 500 Vrms min.
R.F. HiPot Voltage: 325 Vrms min @ 5MHz.
Corona Level: 190 Vrms @ 70,000 ft.
Insulation Resistance: 5,000 MegOhms min.
Contact Resistance:
Center Contact: 4.0 Milliohm max.
Outer Contact: 2.0 Milliohm max.
R.F. Leakage: -80 dB max to 3.0 GHz.
-60 dB max to 18.0 GHz.

MECHANICAL:

Mating Characteristics:
Interface per Mil-Std-348.
Force To Engage:
Full Detent: 15 lbs max
Limited Detent: 10 lbs max
Smooth Bore: 2 lbs max
Force To Disengage:
Full Detent: 5 lbs min
Limited Detent: 2 lbs min
Smooth Bore: .5 lbs min
Center Contact Retention:
Axial Force: 1.5 pounds min.
Note: is soldered onto PCB.
Radial Torque: NA
Connector Durability:
Full Detent: 100 cycles min.
Limited Detent: 500 cycles min.
Smooth Bore: 1,000 cycles min.
Connector Attachment Strength: 20 lbs max.
Note: Depend on the solder techniques.

FINISH(ES):

Body & Center Conductor:
Gold plate per ASTM B-488, Type II, Code C or D, Class 1.25 over nickel under plated per SAE AMS-QQ-N-290, Class 1.

APPLICABLE CARLISLE IT DOCUMENTS

WORK STD	PROD INST	ASSY INST
NA	NA	NA

APPLICABLE CARLISLE IT DOCUMENTS

WORK STD	PROD INST	ASSY INST
NA	NA	NA

NOTICE

THE DRAWING ENGINEER IS RESPONSIBLE FOR VERIFYING DESIGN ORIGINATED BY CARLISLE INTERCONNECT TECHNOLOGIES AND ALL DESIGN MANUFACTURING, REVISIONS, AND ALL DIMENSIONS ARE THE PROPERTY OF CARLISLE INTERCONNECT TECHNOLOGIES. THE DRAWING ENGINEER HAS AGREED TO ACCEPT THE DRAWING FOR THE PURPOSES OF THE DESIGN AND MANUFACTURE OF THE PRODUCT. THE DRAWING ENGINEER HAS AGREED TO INCORPORATE ANY DESIGN FEEDBACK FROM THE CUSTOMER INTO THE NEXT REVISION OF THE DRAWING. THE DRAWING ENGINEER HAS AGREED TO REMOVE ALL DIMENSIONS FROM THE DRAWING THAT ARE NOT NECESSARY FOR THE MANUFACTURE OF THE PRODUCT. THE DRAWING ENGINEER HAS AGREED TO REMOVE ALL DIMENSIONS FROM THE DRAWING THAT ARE NOT NECESSARY FOR THE MANUFACTURE OF THE PRODUCT.

TOLERANCES AND NOTES

- DIMENSIONS ARE IN INCHES.
- ANGULAR ± 1/2°
- FRACTION FINISH: 1/32
- MACHINE FINISH: 1/32
- BREAK ALL SHARP EDGES .003 MAX.
- WASHED FILLETS .005 MAX.
- MACHINED SURFACES SQUARE TO RESPECTIVE AXIS UNLESS OTHERWISE SPECIFIED.
- MACHINED DIAMETERS CONCENTRIC WITHIN .005.
- DIMENSIONS TO BE MET BEFORE PLATING.
- THREADS ARE HANDED 45°.
- REMOVE FRAMED EDGES ON TELON.
- REMOVE FRAMED EDGES ON TELON.

ENVIRONMENTAL:

Temperature Range: -65°C to +165°C.
Thermal Shock: Mil-Std-202, Method 107, Test Cond. C.
Moisture Resistance: Mil-Std-202, Method 106, except step 7b shall be omitted. Insulation resistance at least 1,000 MegOhms within 5 minutes after removal from humidity.
Corrosion: Mil-Std-202, Method 101, Test Cond. B.
Vibration: Mil-Std-202, Method 204, Test Cond. D.
Shock: Mil-Std-202, Method 213, Test Cond. I.

MECHANICAL:

Mating Characteristics:
Interface per Mil-Std-348.
Force To Engage:
Full Detent: 15 lbs max
Limited Detent: 10 lbs max
Smooth Bore: 2 lbs max
Force To Disengage:
Full Detent: 5 lbs min
Limited Detent: 2 lbs min
Smooth Bore: .5 lbs min
Center Contact Retention:
Axial Force: 1.5 pounds min.
Note: is soldered onto PCB.
Radial Torque: NA
Connector Durability:
Full Detent: 100 cycles min.
Limited Detent: 500 cycles min.
Smooth Bore: 1,000 cycles min.
Connector Attachment Strength: 20 lbs max.
Note: Depend on the solder techniques.

FINISH(ES):

Body & Center Conductor:
Gold plate per ASTM B-488, Type II, Code C or D, Class 1.25 over nickel under plated per SAE AMS-QQ-N-290, Class 1.

APPLICABLE CARLISLE IT DOCUMENTS

WORK STD	PROD INST	ASSY INST
NA	NA	NA

APPLICABLE CARLISLE IT DOCUMENTS

WORK STD	PROD INST	ASSY INST
NA	NA	NA

NOTICE

THE DRAWING ENGINEER IS RESPONSIBLE FOR VERIFYING DESIGN ORIGINATED BY CARLISLE INTERCONNECT TECHNOLOGIES AND ALL DESIGN MANUFACTURING, REVISIONS, AND ALL DIMENSIONS ARE THE PROPERTY OF CARLISLE INTERCONNECT TECHNOLOGIES. THE DRAWING ENGINEER HAS AGREED TO ACCEPT THE DRAWING FOR THE PURPOSES OF THE DESIGN AND MANUFACTURE OF THE PRODUCT. THE DRAWING ENGINEER HAS AGREED TO INCORPORATE ANY DESIGN FEEDBACK FROM THE CUSTOMER INTO THE NEXT REVISION OF THE DRAWING. THE DRAWING ENGINEER HAS AGREED TO REMOVE ALL DIMENSIONS FROM THE DRAWING THAT ARE NOT NECESSARY FOR THE MANUFACTURE OF THE PRODUCT. THE DRAWING ENGINEER HAS AGREED TO REMOVE ALL DIMENSIONS FROM THE DRAWING THAT ARE NOT NECESSARY FOR THE MANUFACTURE OF THE PRODUCT.

TOLERANCES AND NOTES


- DIMENSIONS ARE IN INCHES.
- ANGULAR ± 1/2°
- FRACTION FINISH: 1/32
- MACHINE FINISH: 1/32
- BREAK ALL SHARP EDGES .003 MAX.
- WASHED FILLETS .005 MAX.
- MACHINED SURFACES SQUARE TO RESPECTIVE AXIS UNLESS OTHERWISE SPECIFIED.
- MACHINED DIAMETERS CONCENTRIC WITHIN .005.
- DIMENSIONS TO BE MET BEFORE PLATING.
- THREADS ARE HANDED 45°.
- REMOVE FRAMED EDGES ON TELON.
- REMOVE FRAMED EDGES ON TELON.

1


ZONE	REV	DESCRIPTION	DATE	BY
-	L	ECO 21939	01.28.09	P.MAO

ZONE	REV	DESCRIPTION	DATE	BY
-	L	ECO 21939	01.28.09	P.MAO

2



3



4

P/N	INTERFACE(S)	Ø A	B	C
-1CC	FULL DETENT	.116	.090	.095
-2CC	LIMITED DETENT	.120	.090	.095
-3CC	SMOOTH BORE	.125	.090	.095
-4CC	FULL DETENT	.116	.050	.055
-5CC	LIMITED DETENT	.120	.050	.055
-6CC	SMOOTH BORE	.125	.050	.055

D



C



B

ENVIRONMENTAL:
Temperature Range: -65°C to +165°C.
Thermal Shock: Mil-Std-202, Method 107, Test Cond. C.
Moisture Resistance: Mil-Std-202, Method 106, except step 7b shall be omitted. Insulation resistance at least 1,000 MegOhms within 5 minutes after removal from humidity.
Corrosion: Mil-Std-202, Method 101, Test Cond. B.
Vibration: Mil-Std-202, Method 204, Test Cond. D.
Shock: Mil-Std-202, Method 213, Test Cond. I.


A

MATERIAL	DATE	PROCUREMENT
ATV	08.10.99	
P.MAO	08.10.99	

CARLISLE Interconnect Technologies
Long Beach, CA 90815

TITLE	SCALE	SUB-DIRECTORY/FILENAME	SHEET	REV.
SMP MALE, PCB EDGE MOUNT TO Ø .015 STRAIGHT TERMINATION	10:1	OLPXXX\OLP606	1	2
C 30990		P606		L

ENG-DWG REV. C 4

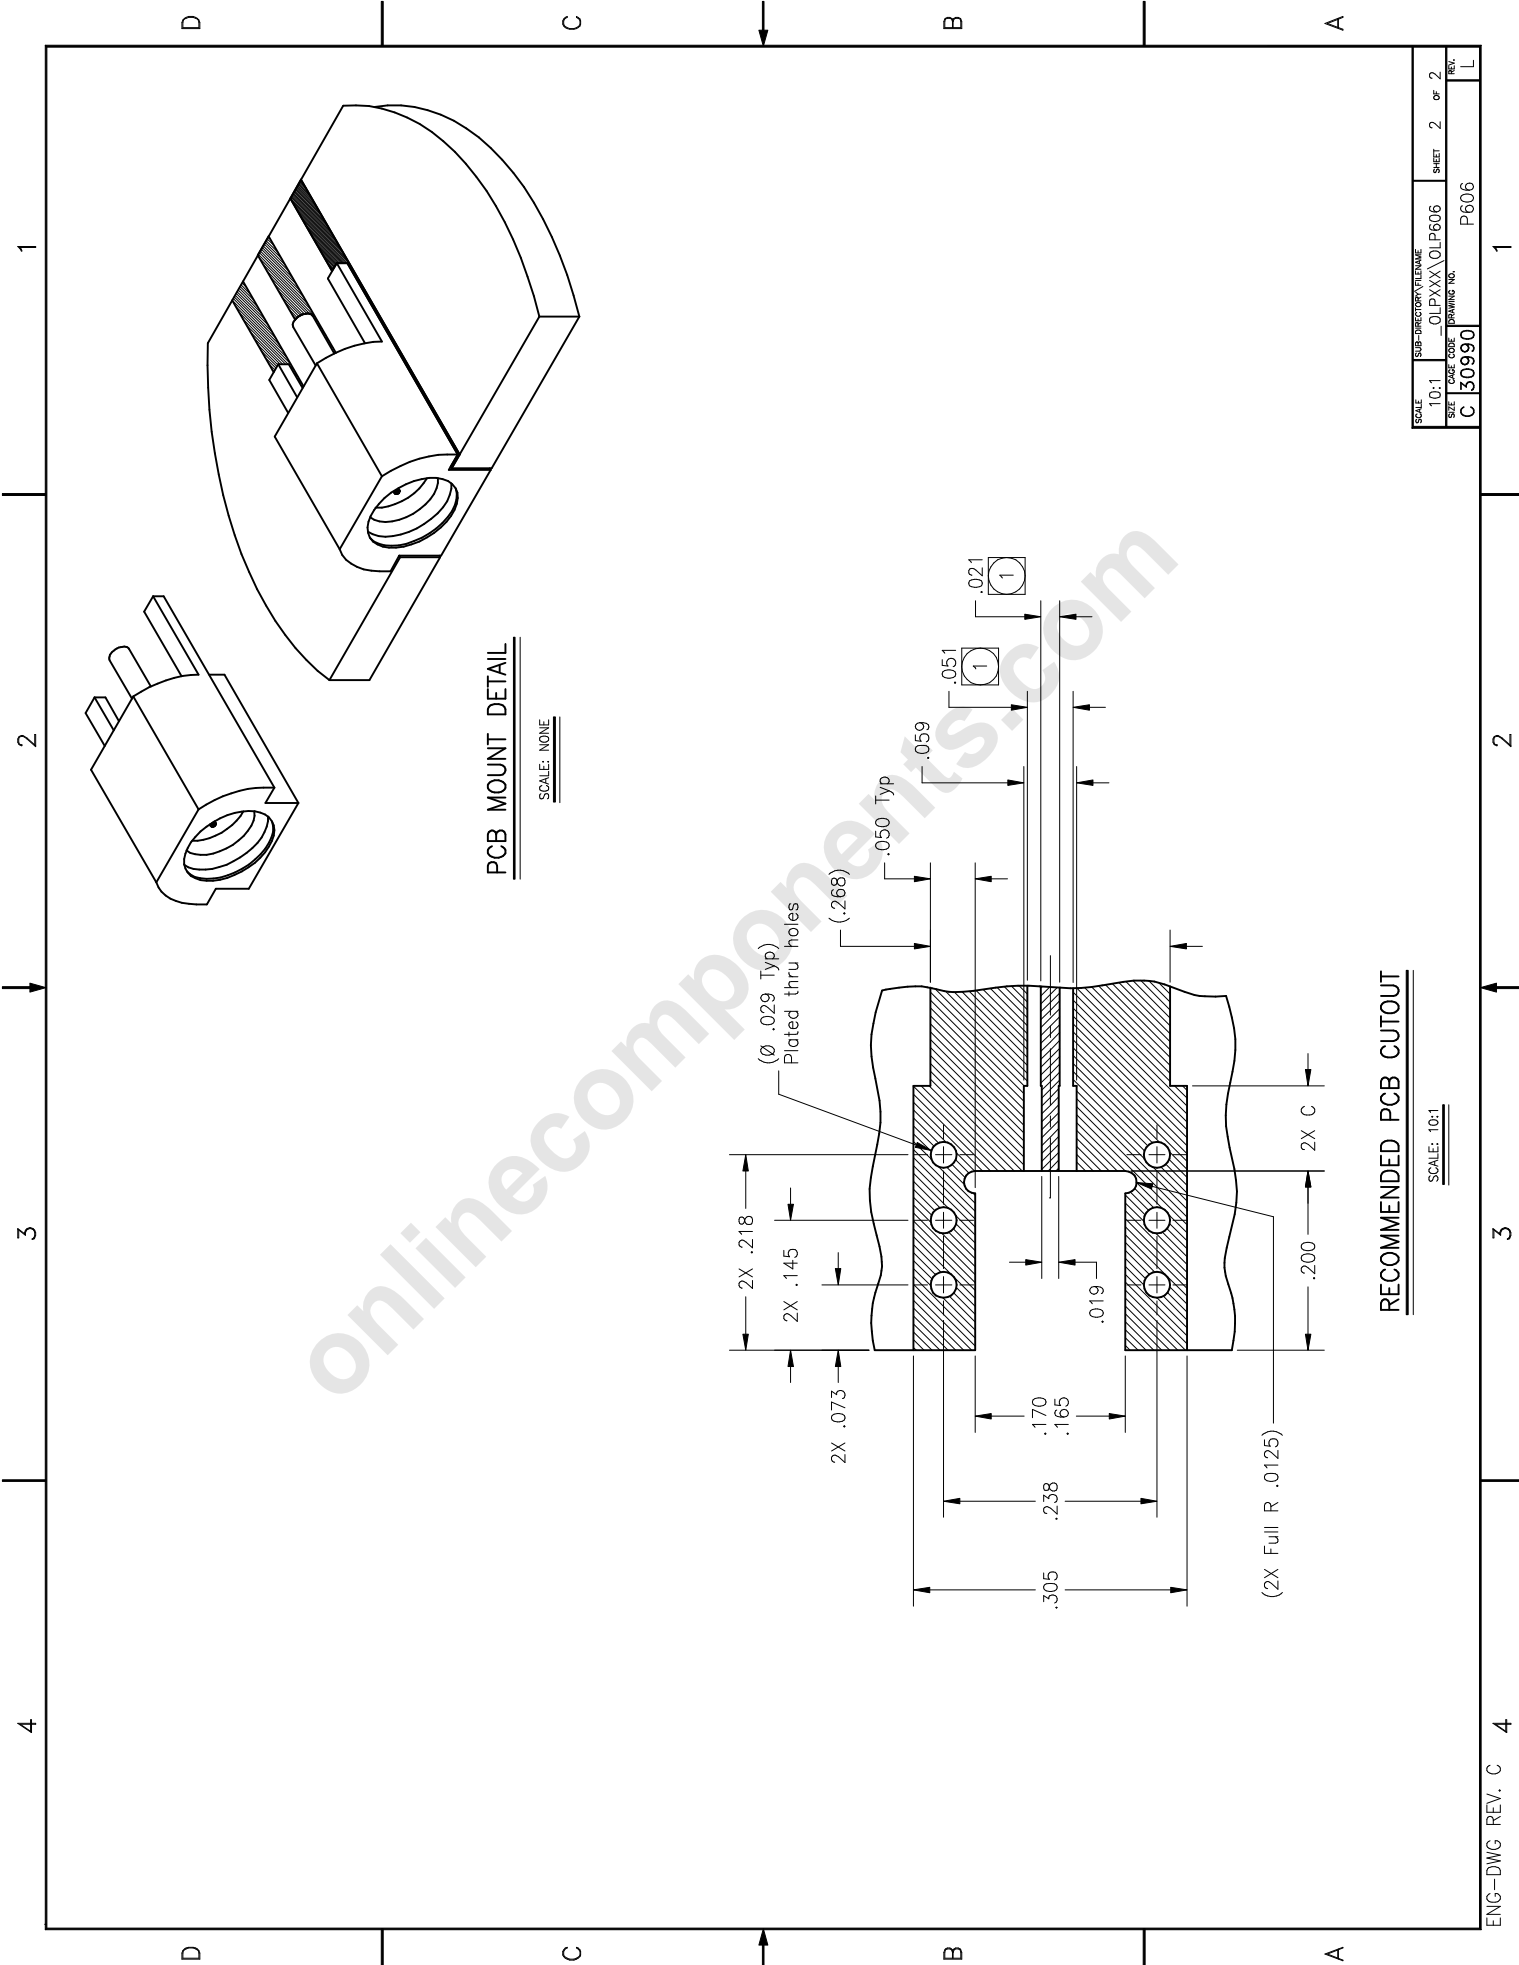

PCB MOUNT DETAIL

SCALE: NONE

RECOMMENDED PCB CUTOUT

SCALE: 10:1

SCALE	SUP-DIRECTORY/FILENAME	SHEET	of	REV.
10:1	_OLPXXX\OLP606	2	2	L
SIZE	FIG CODE	DRAWING NO.		
C	30990	P606		