


Datasheet

Art.No. 26.640.0253.0

PCB connector 8513 B / 2 KS

PCB female connector, pitch 3,5 mm, wire lead in line with connecting direction, screw connection, 2 -pole, colour grey, with pull out retention, with marking, series: 8513 B/ 2 KS

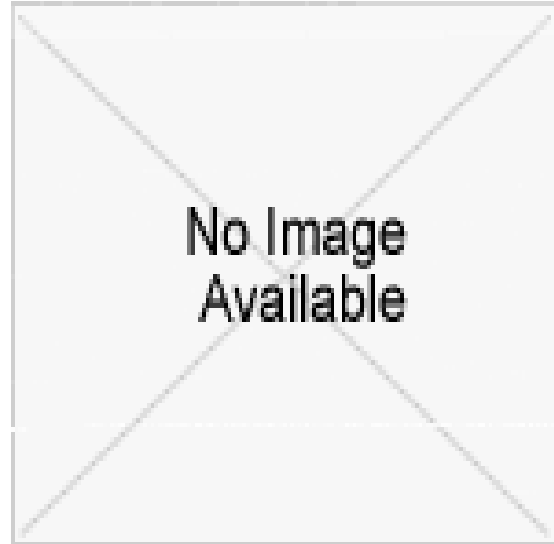

Art.No.	26.640.0253.0
EAN	4015573895508
Order unit	100 pieces

Approvals



Technical data

General

Modular spacing	3.5 mm
Connection type	Screw connection
Soldering process	None
Packaging	Carton
Number of poles	2
Marking	Yes
Fastening	None
Mating direction towards connector	180°

Technical data

Nominal cross section	1.5 mm ²
Rated current	8 A
Overvoltage Category I	690 V
Overvoltage Category II	250 V
Overvoltage Category III	125
Rated impulse voltage	2.5 kV
Wire strip length	6.5 mm

Connection Data

Minimum cross section solid	0.14 mm ²
Maximum cross section solid	1.5 mm ²
Minimum cross section fine stranded	0.14 mm ²
Maximum cross section fine stranded	1.5 mm ²

Wire strip length	6.5 mm
-------------------	--------

Technical Data UL/CSA

Cross section UL	16-30 AWG
Voltage UL	300 V
Current field wiring	8 A
Current factory wiring	8 A
Cross section CSA	22-14 AWG
Voltage CSA	300 V
Current CSA	5 A

Other

Type of insulation material	Thermoplastic
Colour	Grey
Height	11.1 mm
Length	7 mm
Depth	15.5 mm
Material attachment screw	Steel
Material contact base	CuSn
Material contact surface	Sn

Classification

ECLASS 8.1	27440402
ETIM 6.0	EC002637
ETIM 5.0	EC002637
ETIM 4.0	EC002637