



DIMENSIONS:

A	2.813" ±0.063
B	2.215" ±0.125
C	2.370" ±0.063
D	2.375" ±0.063
E	1.076" ±0.063
G	0.187" ±0.063
H	2.188" ±0.063
J	1.458" ±0.063

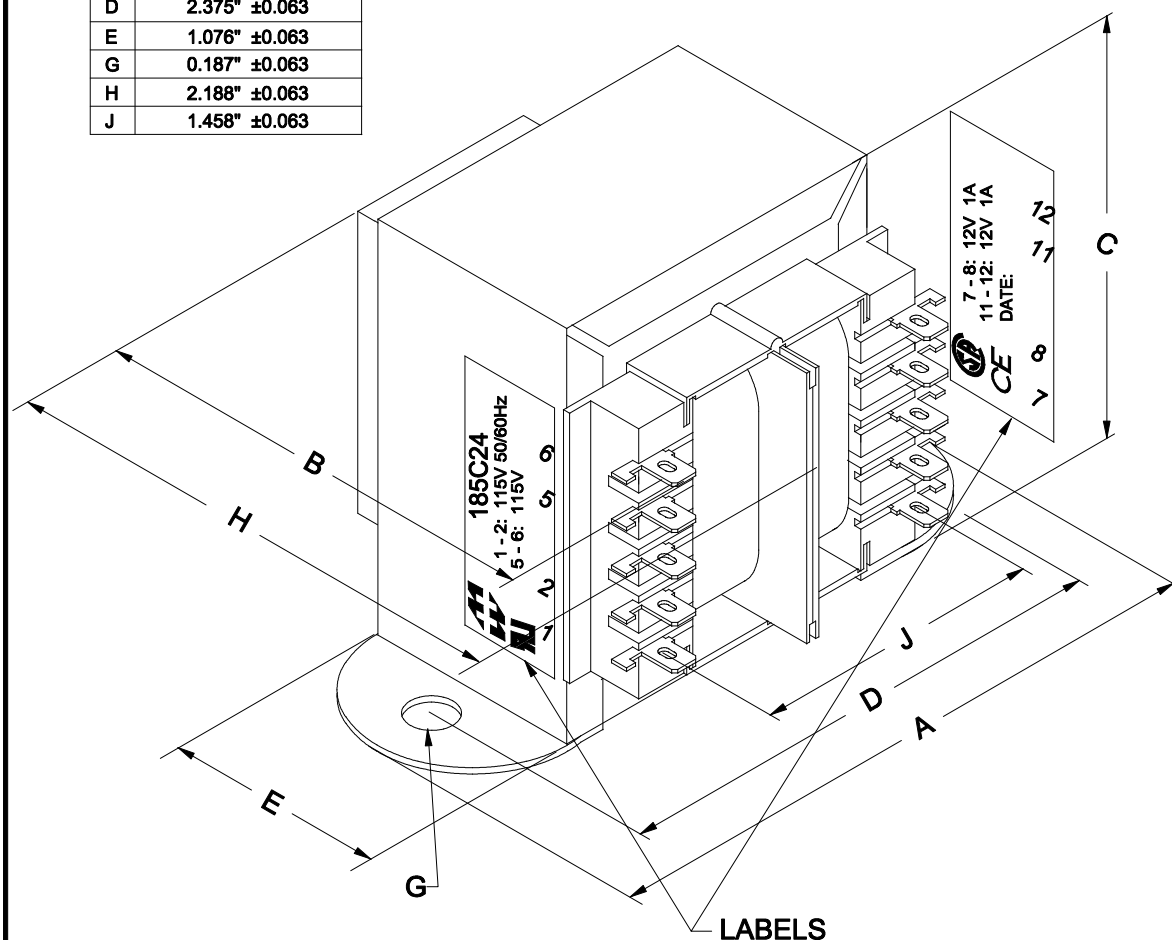

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I _{ex}	@ 115V, 60Hz, PIN 1 - PIN 2	80.4mA	Max.
Sec. N.L.V	@ 115V, 60Hz, PIN 1 - PIN 2		
	PIN 5 - PIN 6 =	115.0V	±2%
	PIN 7 - PIN 8 =	13.87V	±2%
	PIN 11 - PIN 12 =	13.87V	±2%
DCR	@ 20°C, PIN 1 - PIN 2 =	44.33 Ω	±20%
	@ 20°C, PIN 5 - PIN 6 =	44.33 Ω	±20%
	@ 20°C, PIN 7 - PIN 8 =	0.659 Ω	±20%
	@ 20°C, PIN 11 - PIN 12 =	0.659 Ω	±20%
HIPOT	PRIMARY - SECONDARY	4000V, 60Hz, 1 SEC	

REV.#	REVISION	DATE	HAMMOND MANUFACTURING™ ELECTRONIC DIVISION			
0	RELEASED.	06/08/15	52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: CHASSIS MOUNT	DWG. NO.
			DATE: 06/08/15	APP'D. BY:	POWER TRANSFORMER	185C24
				DIMENSIONS: IN(X) MM()		

PH # (519) 886-6181
FAX # (519) 886-9540