

WHEN THE VERTICAL OR VERTICAL-HORIZONTAL COMBINED TYPE CASE IS USED WITH THE PC-BOARD DIPPING TYPE OR RIGHT ANGLE TYPE CONNECTOR

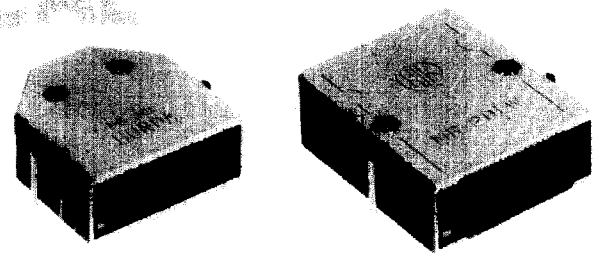

Example of 20-contact connector combination

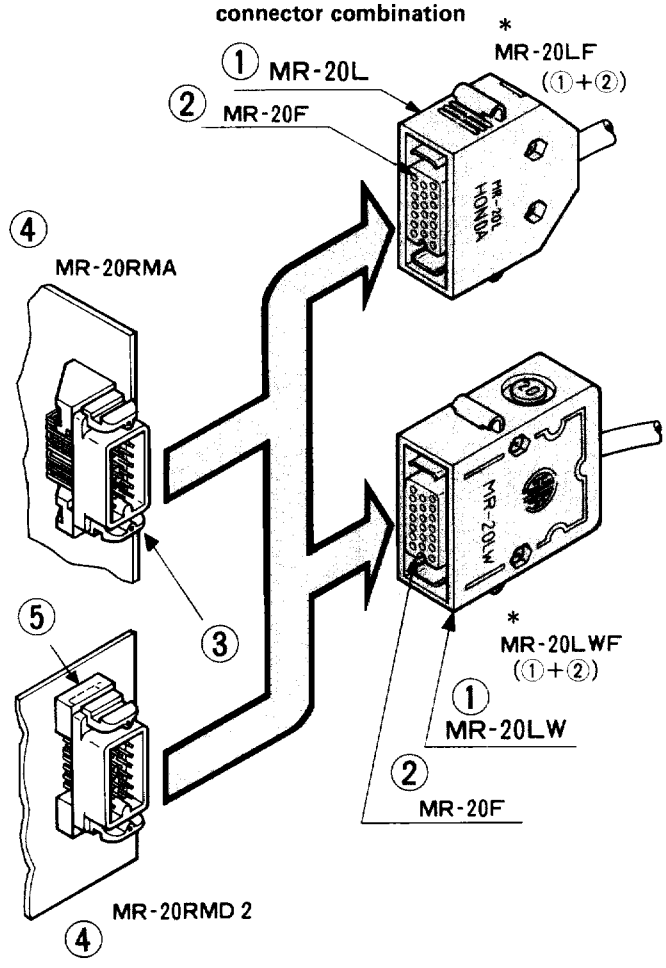

No.	Items	Part No.		Plating and Material
①	Case	MR-20L or LW		ABS resin
②	Connector	MR-20F		
③	Locking Block	MR-R	Zinc die casting Zinc unichrome plated	
④	Connector	MR-20RMA or RMD2		
⑤	Screws	M2.6		Nickel plated

Vertical case	Vertical-horizontal case
MR-(8)L	MR-(8)LW
MR-(16)L	MR-(16)LW
MR-(20)L	MR-(20)LW
MR-(25)L	MR-(25)LW
MR-(34)L	MR-(34)LW
MR-(50)L	MR-(50)LW
	MR-(60)LW

The following connectors can be used on the case side.

Soldering type	Wrapping type	Crimping type
MR-(8)M MR-(8)F	MR-(8)MW MR-(8)FW	MRP-(8)M01 MRP-(8)F01
MR-(16)M MR-(16)F	MR-(16)MW MR-(16)FW	MRP-(16)M01 MRP-(16)F01
MR-(20)M MR-(20)F	MR-(20)MW MR-(20)FW	MRP-(20)M01 MRP-(20)F01
MR-(25)M MR-(25)F	MR-(25)MW MR-(25)FW	MRP-(25)M01 MRP-(25)F01
MR-(34)M MR-(34)F	MR-(34)MW MR-(34)FW	MRP-(34)M01 MRP-(34)F01
MR-(50)M MR-(50)F	MR-(50)MW MR-(50)FW	MRP-(50)M01 MRP-(50)F01
MR-(60)M MR-(60)F	MR-(60)MW MR-(60)FW	

(same specification as that of case-side connectors)

Soldering type		Wrapping type	
MR-(8)RMD2	MR-(8)RFD2	MR-(8)RMA	MR-(8)RFA
MR-(16)RMD2	MR-(16)RFD2	MR-(16)RMA	MR-(16)RFA
MR-(20)RMD2	MR-(20)RFD2	MR-(20)RMA	MR-(20)RFA
MR-(25)RMD2	MR-(25)RFD2	MR-(25)RMA	MR-(25)RFA
MR-(34)RMD2	MR-(34)RFD2	MR-(34)RMA	MR-(34)RFA
MR-(50)RMD2	MR-(50)RFD2	MR-(50)RMA	MR-(50)RFA

Note 1: When case-side connector is a male connector, the applicable connector must be a female connector.

Note 2: Part No. marked with an asterisk * indicates that of the part with connectors combined.