

CAR Series



Features:

- Tolerance down to 0.01%
- TCR down to 5ppm/°C
- High reliability
- Superior moisture performance
- Non-standard values available
- High stability metal film
- Matched sets available



All Pb-free parts comply with EU Directive 2011/65/EU amended by (EU) 2015/863 (RoHS3)

Electrical Data

		CAR5	CAR6	CAR7
Power rating @70°C	W	0.25	0.33	0.5
Power rating @85°C	W	0.125	0.25	0.33
Resistance range	ohms	10R – 3M0	10R – 5M0	10R – 10M
Limiting element voltage	V	250	350	500
TCR (20 – 70°C) ¹	ppm/°C	5, 10, 15, 25, 50		
Resistance tolerance ¹	%	0.01, 0.02, 0.05, 0.1, 0.25, 0.5, 1		
Standard values ²		E24 & E96 preferred		
Thermal impedance	°C/W	110	70	60
Ambient temperature range	°C	-55 to 155		

Note 1: See table of resistance restrictions

Note 2: Non-standard values may be requested

Physical Data

Dimensions in mm and weight in g							
Type	L max	D max	f min ¹	d nom	PCB mounting centres	Min. bend radius	Wt. nom
CAR5	7.2	2.5	30	0.6	10.2	0.6	0.24
CAR6	10	3.7	30	0.6	12.7	0.6	0.4
CAR7	15.5	5.5	30	0.8	18.4	1.2	1.15



Note 1: Dimension relates only to bulk packed products

Construction

A metal film is deposited onto a high quality ceramic rod. Nickel-plated steel caps are force fitted to the rod and termination wires are welded to the caps. The resistor is adjusted to value by a helical cut in the film and the body is protected with a specially formulated epoxy coating.

Marking

Type reference, TCR code, resistance value and tolerance code are legend marked. The resistance values conform to IEC 62.

Terminations

Material Copper wire with Sn or SnPb finish.

Strength The terminations meet the requirements of IEC 68.2.21.

Solderability The terminations meet the requirements of IEC 115-1, clause 4.17.3.2.

Solvent Resistance

The body protection and marking are resistant to all normal industrial cleaning solvents suitable for printed circuit boards.

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

Performance Data

		Values ≤250K		Values >250K	
		Maximum	Typical	Maximum	Typical
Load at rated power: Load, 1000 hours at 70°C / 85°C	±ΔR%	0.05	0.02	0.25	0.05
Load at rated power: Load, 8000 hours at 70°C / 85°C	±ΔR%	0.1	0.04	0.5	0.1
Dry heat: No load, 1000 hours at 155°C	±ΔR%	0.15	0.08	1	0.2
Shelf life test: 12 months at room temperature	±ΔR%	0.01	0.003	0.04	0.02
Derating from rated power at 70°C / 85°C		Zero @155°C			
Short term overload: Lesser of 6.25xP _r or 2.5xL _{EV} for 5s	±ΔR%	0.01	0.001	0.08	0.01
Climatic	±ΔR%	0.05	0.02	0.2	0.05
Climatic category		55/155/56			
Long term damp heat	±ΔR%	0.05	0.02	0.2	0.05
Temperature rapid change	±ΔR%	0.04	0.02	0.25	0.05
Resistance to solder heat	±ΔR%	0.02	0.003	0.05	0.005
Vibration	±ΔR%	0.02	0.002	0.06	0.02
Bump	±ΔR%	0.02	0.002	0.06	0.02
Noise in a decade of frequency	μV/V	0.2	0.03	1	0.1
Voltage coefficient of resistance	ppm/V	0.3	<0.05	0.2	<0.05

Table of Resistance Restrictions

TCR ppm/°C	Tolerance %									
	CAR5			CAR6			CAR7			
	0.01 – 0.02	0.05	0.1 - 1	0.01 – 0.02	0.05	0.1 - 1	0.01 – 0.02	0.05	0.1 - 1	
5 ¹	50R to 300K	10R to 500K		50R to 500K	10R to 500K		50R to 750K	10R to 750K		
10		10R to 1M0	10R to 1M0		10R to 1M0	10R to 1M0		10R to 3M0	10R to 1M0	10R to 1M5
15			10R to 1M5							10R to 3M5
25			10R to 3M0							10R to 5M0
50			10R to 10M							

Note 1: Based on sampling. 100% screened product is available.


Application Notes

Matched Sets

TT Electronics has many years' experience in the supply of matched sets of precision resistors. Resistors can be supplied matched for tolerance and TCR down to ±0.005% and ±1ppm/°C.

Packaging

CAR5 and CAR6 standard packing is in tape, as shown below, whilst CAR7 is bulk packed.

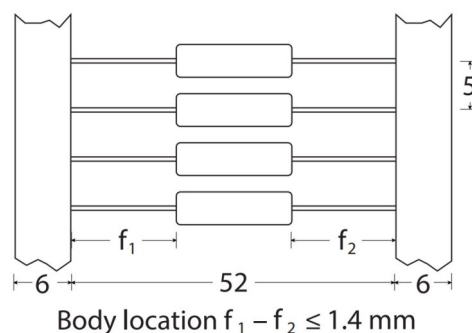

CAR Series

Ordering Procedure

This product has two valid part numbers:

European (Welwyn) Part Number: CAR5V-31K6PI (CAR5 with TCR $\pm 5\text{ppm}/^\circ\text{C}$ at 31.6 kilohms $\pm 0.02\%$, Pb-free)

C	A	R	5	V	-	3	1	K	6	P	I	
1		2	3			4	5					

1	2	3	4	5		
Type	TCR (ppm/ $^\circ\text{C}$)	Value	Tolerance	Finish, Screening & Packing		
CAR5	V = ± 5	E24 = 3/4 characters	L = $\pm 0.01\%$	I	Pb-free (RoHS)	
CAR6	T = ± 10	E96 = 3/4 characters	P = $\pm 0.02\%$	SC	Pb-free with screened TCR (5ppm only)	
CAR7	Y = ± 15	Custom values may use more than 4 characters R = ohms K = kilohms M = megohms	W = $\pm 0.05\%$	PB	Sn(95)Pb(5) finish	
	D = ± 25		B = $\pm 0.1\%$	All above in Standard Packing		
	C = ± 50		C = $\pm 0.25\%$	CAR5	Ammo	Up to 5000/box
			D = $\pm 0.5\%$	CAR6		Up to 2500/box
			F = $\pm 1\%$	CAR7	Bulk	250/box

USA (IRC) Part Number: CAR5LFV3162PA (CAR5 with TCR $\pm 5\text{ppm}/^\circ\text{C}$ at 31.6 kilohms $\pm 0.02\%$, Pb-free)

C	A	R	5	L	F	V	3	1	6	2	P	A
1		2	3	4			5	6				

1	2	3	4	5	6		
Type	Termination	TCR (ppm/ $^\circ\text{C}$)	Value	Tolerance	Packing		
CAR5	Omit for	V = ± 5	3 digits + multiplier	L = $\pm 0.01\%$	A	CAR5	Ammo, up to 5000/box
CAR6	Sn(95)Pb(5)	T = ± 10	R = ohms for values <100 ohms	P = $\pm 0.02\%$		CAR6	Ammo, up to 2500/box
CAR7	LF = Pb-free	Y = ± 15		W = $\pm 0.05\%$	B	CAR7	Bulk, 250/box
		D = ± 25		B = $\pm 0.1\%$			
		C = ± 50		C = $\pm 0.25\%$			
				D = $\pm 0.5\%$			
				F = $\pm 1\%$			