

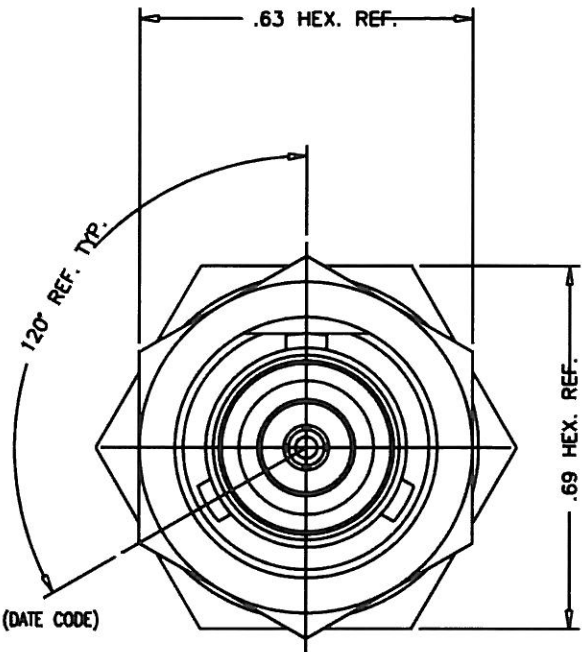


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

# GSD

2112-1-5 (SHT 1 OF 2)

REVISIONS	
REV	CHANGES
0	ER 18398 MAB 06/13/78
1	CN 18739 D LI 09/28/78
2	CN 39658 A REDRAWN HVN 10/10/06

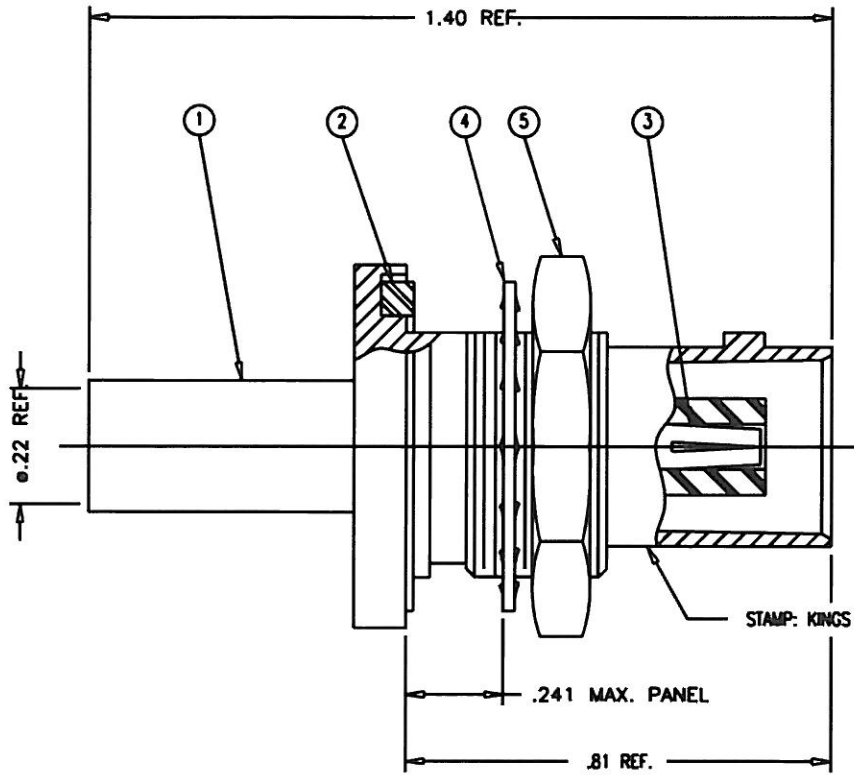

STAMP: KINGS 2112-1-5 YRWK (DATE CODE)  
91836

**NOTES:**

- FOR USE WITH RG-142, 223 & 400/U CABLE GROUPS.
- FOR CABLING INSTRUCTIONS SEE CP-465.
- FOR REFERENCE: FOR CABLE TRIMMING USE KTJ-113 & KTD-166.
- FOR CRIMPING USE DIE KTH-2001.
- CENTER CONTACT TO BE SUPPLIED UNASSEMBLED.
- INTERFACE PER MIL-STD-348, FIG. 301-2 WHERE APPLICABLE.
- MARK PACKAGE: KINGS 2112-1-5  
91836  
5M1716-19F  
YRWK (DATE CODE)
- MATERIALS:  
INSULATOR: TEFLON, ASTM-D-4894  
CENTER CONTACT: BER. COPPER, ASTM-B-196  
GASKET: SILICONE RUBBER, A-A-59588  
LOCKWASHER: PHOSPHOR BRONZE, ASTM-B103  
ALL OTHER METAL PARTS: BRASS, ASTM-B16

- FINISHES:  
CENTER CONTACT: HARD GOLD PLATE, PER ASTM-B-488  
ALL OTHER METAL PARTS: SILVER PLATE, PER ASTM-B-700
- ELECTRICAL CHARACTERISTICS:  
NOMINAL IMPEDANCE: 50 OHMS  
WORKING VOLTAGE: 500 VRMS  
FREQUENCY RANGE: DC TO 4 GHz.  
VSWR: 1.30 MAX. 0-4 GHz  
INSERTION LOSS: .2dB MAX. AT 3GHz
- CONNECTOR WEIGHT: 16 GRAMS (.035 LBS)

SCALE 4:1	
APPROX SURFACE AREA	
USED ON	
REF: BOEING #5M1716-19F REV. B	
3 STUDED BNC BULKHEAD JACK	
DRAWN H. NGUYEN	DATE 10/10/06
DESIGN LJ	DATE 06/13/78
APPR.	DATE

**KINGS**  
ELECTRONICS CO., INC.  
ROCK HILL, SOUTH CAROLINA 29730

# GSD

2112-1-5 (SHT 1 OF 2)

