GSD

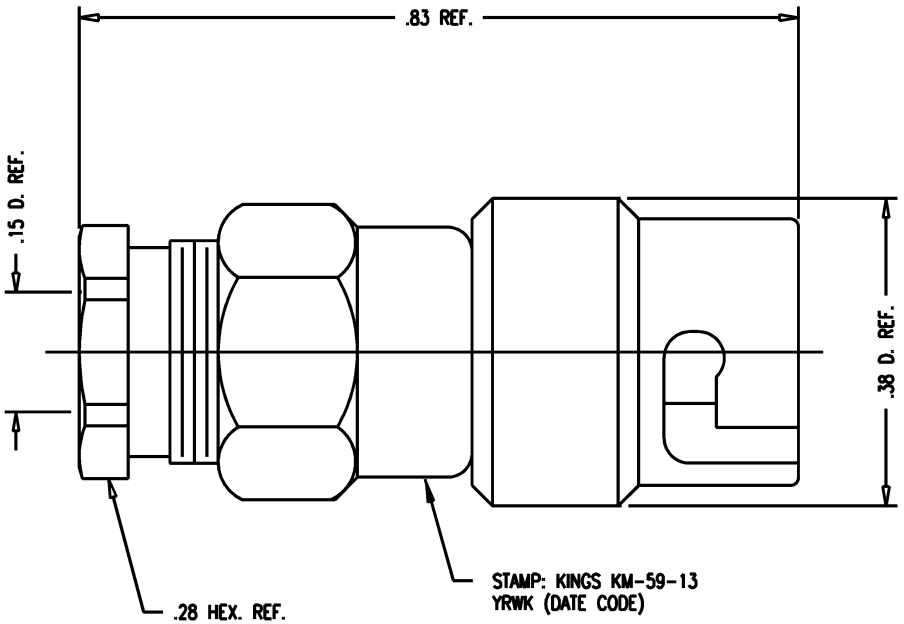


NOTES:
1. FOR USE WITH RG-55, 142 & 223/U CABLE.
2. MATERIALS:
   GASKETS: SILICON RUBBER, ZZ-R-765
   INSULATOR: TEFLON, ASTM-D-4894
   SPRING: MUSIC WIRE
   CENTER CONTACT: BER. COPPER, ASTM-B-196
   ALL OTHER PARTS: BRASS, ASTM-B16
3. FINISHES:
   SPRING: CADMIUM PLATE PER QQ-P-416
   ALL OTHER METAL PARTS: GOLD PLATE PER MIL-G-45204
   OVER NICKEL PLATE PER QQ-N-290
4. ELECTRICAL CHARACTERISTICS:
   NOMINAL IMPEDANCE: NON-CONSTANT
   VOLTAGE RATING: 500 VRMS
   FREQUENCY RANGE: DC TO 500 MHz

GSD

KM-59-13

| REVISIONS | |
|---|---|
| ISSUE | CHANGES |
| 7 | CN 36782 E<br>REDRAWN<br>KH 01/25/96 |
| 8 | CN 37859 E<br>TML 07/12/99 |

KAM6342

| | |
|---|---|
| SCALE | 6:1 |
| APPROX SURFACE AREA | |
| | |
| USED ON | |
| REF: | LIQUIDOMETER DWG. NO. S62 PH-IF |

PL, KM

| | | | |
|---|---|---|---|
| DRAWN | KH | DATE | 01/25/96 |
| DESIGN | MJB | DATE | 01/26/96 |
| APPR. | | DATE | |

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

KM-59-13

MAY 2007 THIS DRAWING BECAME THE PROPERTY OF PROPERTY OF
WINCHESTER ELECTRONICS CORPORATION, WALLINGFORD, CT 06492