
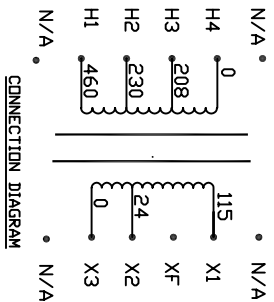
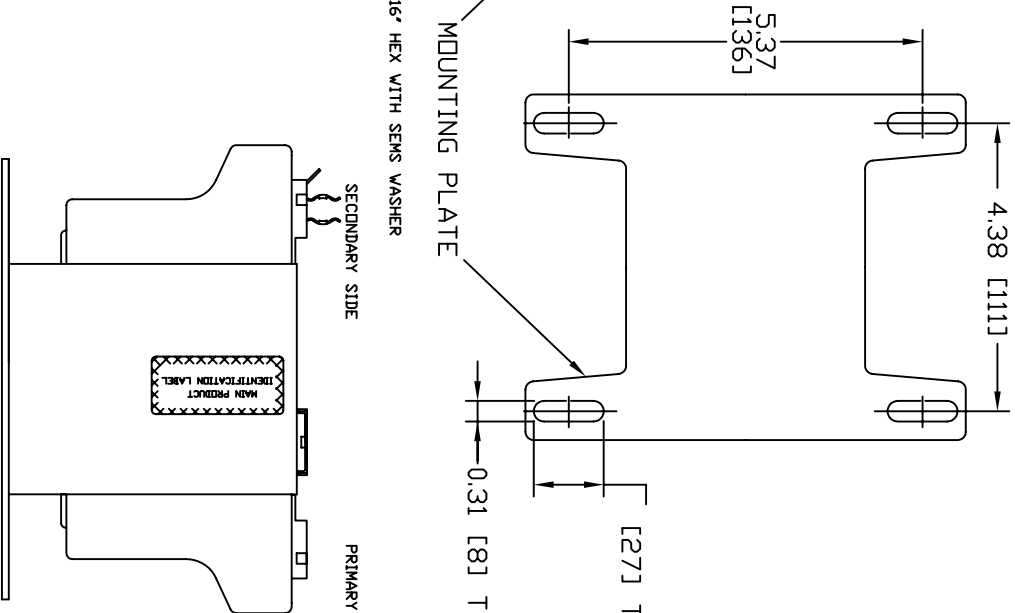
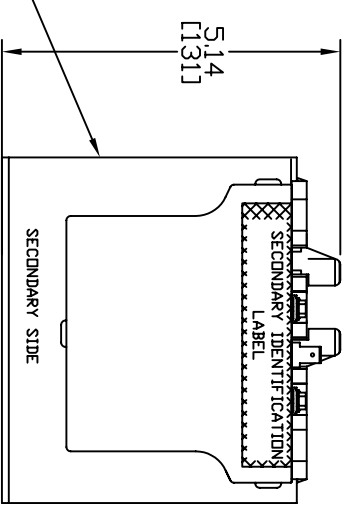


Transformer Specifications	
PRIMARY VOLTAGE(S)	208/230/460 (TRIPLE)
SECONDARY VOLTAGE(S)	24/115
RATED VA	500
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL/CUL
ESTIMATED WEIGHT	23.1 LBS

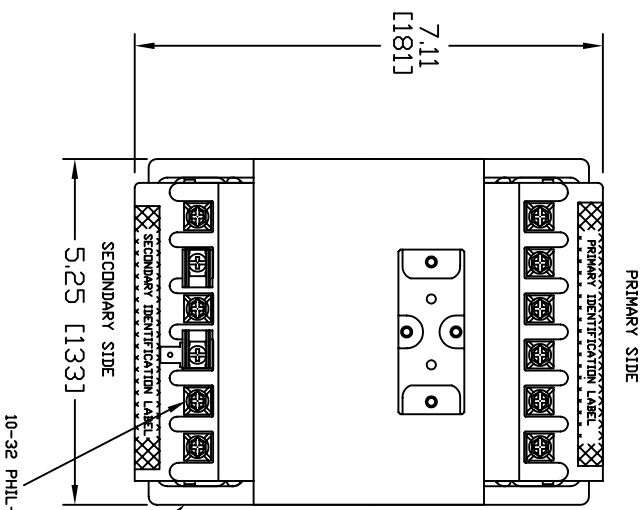


- NOTE:**
 1. FUSE CLIPS TO ACCOMMODATE 1/2" DIA.
 2. ALL MEASUREMENTS IN INCHES (MM)


CONNECTION TABLE LABEL

WINDING	VOLTS	AMPS	VA	WATT
H1	460	1.1	500	500
H2	230	2.2	500	500
H3	208	2.4	500	500
H4	0	0	0	0

NOTE: IF NON-OILING AND LIGHT SHADING/CONTRASTING, SHOULD BE LOOKED OUT THE TEMPERATURE, AND LIGHT INDICATIONS.

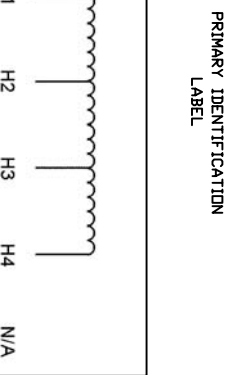

PRIMARY IDENTIFICATION LABEL

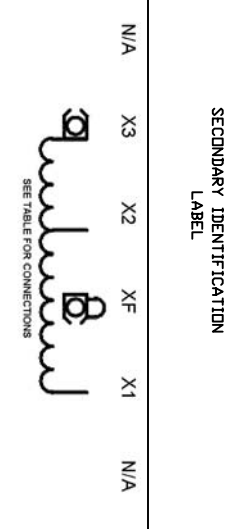

SECONDARY IDENTIFICATION LABEL

MIKRON
 U.S. PAT. NO. 3,516,940
 500VA
 TEMP CL. 130°C
 CAT. NO. B500-2008-1F
 SERIES 2

UL LISTED 702X

MAIN PRODUCT IDENTIFICATION LABEL

NO.	DESCRIPTION	QTY.	REVISIONS
1			

PACKAGED ACCESSORIES

MIKRON
 14,00000-1000000-1000000-1000000-1000000
 DATE: 10/31/07
 REVISION: 1
 BY: JGV
 CHECKED: JGV

SIZE	SCALE	C NAME
N/A	1:1	B500-2008-1F