

## DIODE ARRAY CIRCUITS

### DESCRIPTION

The Linfinty series of diode arrays feature high breakdown, high speed diodes in a variety of configurations.

Each array configuration consists of either common anode diodes, common cathode diodes, or a combination of common anode and common cathode diodes.

Individual diodes within the array have 60V minimum breakdown voltage, can handle 500mA of current and typically switch in less than 10 nanoseconds.

Each of the array configurations is available in ceramic DIP or ceramic flatpack and can be processed to JANTXV, JANTX, or JAN flows at Linfinty's MIL-S-19500 facility.





### FEATURES

- 60V minimum breakdown voltage
- 500mA current capability per diode
- Fast switching speeds: typically less than 10ns
- Low leakage current

### HIGH RELIABILITY FEATURES

- ◆ MIL-S-19500/474 QPL - 1N5768 - 1N6506  
- 1N5770 - 1N6507  
- 1N5772 - 1N6508  
- 1N5774 - 1N6509
- ◆ JANTXV, JANTX & JAN available
- ◆ LMI level "S" processing available

### CIRCUIT DIAGRAMS

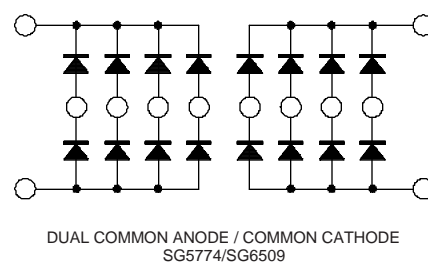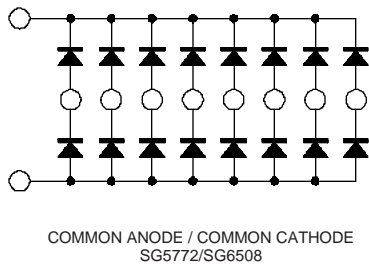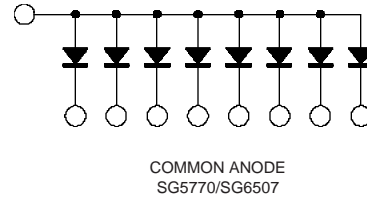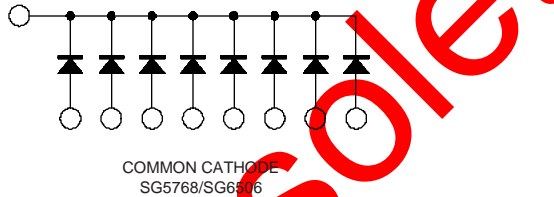

## ABSOLUTE MAXIMUM RATINGS (Note 1 & 2)

Breakdown Voltage ( $V_{BR}$ ) ..... 60V  
 Output Current ( $I_O$ ),  $T_C = 25^\circ\text{C}$   
     Continuous ..... 500mA

Operating Junction Temperature  
     Hermetic (J, F Packages) ..... 150°C  
 Storage Temperature Range ..... -65°C to 200°C

Note 1. Exceeding these ratings could cause damage to the device.  
 Note 2. Applicable for each diode.

## THERMAL DATA

J Package:

    Thermal Resistance-Junction to Case,  $\theta_{JC}$  ..... 30°C/W  
     Thermal Resistance-Junction to Ambient,  $\theta_{JA}$  ..... 80°C/W

F Package (10 Pin):

    Thermal Resistance-Junction to Case,  $\theta_{JC}$  ..... 80°C/W  
     Thermal Resistance-Junction to Ambient,  $\theta_{JA}$  ..... 145°C/W

F Package (14 Pin):

    Thermal Resistance-Junction to Case,  $\theta_{JC}$  ..... 80°C/W  
     Thermal Resistance-Junction to Ambient,  $\theta_{JA}$  ..... 140°C/W

Note A. Junction Temperature Calculation:  $T_J = T_A + (P_D \times \theta_{JA})$ .

Note B. The above numbers for  $\theta_{JC}$  are maximums for the limiting thermal resistance of the package in a standard mounting configuration. The  $\theta_{JA}$  numbers are meant to be guidelines for the thermal performance of the device/pc-board system. All of the above assume no ambient airflow.

## RECOMMENDED OPERATING CONDITIONS (Note 3)

Operating Ambient Temperature Range

SG5768 ..... -55°C to 150°C  
 SG5770 ..... -55°C to 150°C  
 SG5772 ..... -55°C to 150°C

Operating Ambient Temperature Range

SG5774 ..... -55°C to 150°C  
 SG6506 ..... -55°C to 150°C  
 SG6507 ..... -55°C to 150°C  
 SG6508 ..... -55°C to 150°C  
 SG6509 ..... -55°C to 150°C

Note 3. Range over which the device is functional.

## ELECTRICAL CHARACTERISTICS

(Unless otherwise specified, these specifications apply for the operating temperature of  $T_A = 25^\circ\text{C}$  for each diode. Low duty cycle pulse testing techniques are used which maintains junction and case temperatures equal to the ambient temperature.)

Parameter	Test Conditions	SG5768/SG6506			Units
		Min.	Typ.	Max.	
Breakdown Voltage ( $V_{BR}$ )	$I_R = 10\mu\text{A}$	60			V
Forward Voltage ( $V_F$ )	Duty Cycle $\leq 2\%$ , 300 $\mu\text{s}$ pulse				
				1.0	V
				1.1	V
				1.5	V
Reverse Current ( $I_R$ )	$I_F = 10\text{mA}$ , $T_A = -55^\circ\text{C}$			1.0	V
	$V_R = 40\text{V}$			100	nA
Capacitance (C) (Note 4)	$V_R = 40\text{V}$ , $T_A = 150^\circ\text{C}$			50	$\mu\text{A}$
				4	pf
Forward Recovery Time ( $t_{fr}$ ) (Note 4)	$V_R = 0\text{V}$ , $f = 1\text{MHz}$ , Pin-to-pin			4	ns
Reverse Recovery Time ( $t_{rr}$ ) (Note 4)	$I_F = 500\text{mA}$ , $t_f \leq 15\text{ns}$ , $V_{fr} = 1.8\text{V}$ , $R_S = 50\Omega$			40	ns
	$I_F = I_R = 200\text{mA}$ , $i_{tr} = 20\text{mA}$ , $R_L = 100\Omega$			20	

Note 4. The parameters, although guaranteed, are not 100% tested in production.

# DIODE ARRAY SERIES

## ELECTRICAL CHARACTERISTICS (continued)

Parameter	Test Conditions	SG5770/SG6507			Units
		Min.	Typ.	Max.	
Breakdown Voltage ( $V_{BR}$ )	$I_R = 10\mu A$ , 100ms pulse, $\leq 20\%$ Duty Cycle	60			V
Forward Voltage ( $V_F$ )	Duty Cycle $\leq 2\%$ , 300 $\mu s$ pulse				
	$I_F = 100mA$			1.0	V
	$I_F = 200mA$			1.1	V
	$I_F = 500mA$			1.5	V
Reverse Current ( $I_R$ )	$I_F = 10mA$ , $T_A = -55^\circ C$			1.0	V
	$V_R = 40V$			100	nA
	$V_R = 40V$ , $T_A = 150^\circ C$			50	$\mu A$
Capacitance (C) (Note 4)	$V_R = 0V$ , $f = 1MHz$ , Pin-to-pin			8	pf
Forward Recovery Time ( $t_{fr}$ ) (Note 4)	$I_F = 500mA$ , $t_r \leq 15ns$ , $V_{fr} = 1.8V$ , $R_S = 50\Omega$			40	ns
Reverse Recovery Time ( $t_{rr}$ ) (Note 4)	$I_F = I_R = 200mA$ , $i_{rr} = 20mA$ , $R_L = 100\Omega$		7	20	ns

Parameter	Test Conditions	SG5772/SG6508 SG5774/SG6509			Units
		Min.	Typ.	Max.	
Breakdown Voltage ( $V_{BR}$ )	$I_R = 10\mu A$ , 100ms pulse, $\leq 20\%$ Duty Cycle	60			V
Forward Voltage ( $V_F$ )	Duty Cycle $\leq 2\%$ , 300 $\mu s$ pulse				
	$I_F = 100mA$			1.0	V
	$I_F = 200mA$			1.1	V
	$I_F = 500mA$			1.5	V
Reverse Current ( $I_R$ )	$I_F = 10mA$ , $T_A = -55^\circ C$			1.0	V
	$V_R = 40V$			100	nA
	$V_R = 40V$ , $T_A = 150^\circ C$			50	$\mu A$
Capacitance (C) (Note 4)	$V_R = 0V$ , $f = 1MHz$ , Pin-to-pin			8	pf
Forward Recovery Time ( $t_{fr}$ ) (Note 4)	$I_F = 500mA$ , $t_r \leq 15ns$ , $V_{fr} = 1.8V$ , $R_S = 50\Omega$			40	ns
Reverse Recovery Time ( $t_{rr}$ ) (Note 4)			7	20	ns

Obsoleto

# DIODE ARRAY SERIES



## CONNECTION DIAGRAMS & ORDERING INFORMATION (See Notes Below)

Package	Part No.	Ambient Temperature Range	Connection Diagram
14-PIN CERAMIC DIP J - PACKAGE	SG6506J (1N6506)	-55°C to 150°C -55°C to 150°C	
10-PIN CERAMIC FLATPACK F - PACKAGE	SG5768F (1N5768)	-55°C to 150°C -55°C to 150°C	
14-PIN CERAMIC DIP J - PACKAGE	SG6507J (1N6507)	-55°C to 150°C -55°C to 150°C	
10-PIN CERAMIC FLATPACK F - PACKAGE	SG5770F (1N5770)	-55°C to 150°C -55°C to 150°C	
14-PIN CERAMIC DIP J - PACKAGE	SG6508J (1N6508)	-55°C to 150°C -55°C to 150°C	
10-PIN CERAMIC FLATPACK F - PACKAGE	SG5772F (1N5772)	-55°C to 150°C -55°C to 150°C	

- Note
1. Consult factory for other packages available.
  2. All packages are viewed from the top.
  3. Consult factory for JAN, JAN TX, and JAN TXV product availability.

# DIODE ARRAY SERIES

## CONNECTION DIAGRAMS & ORDERING INFORMATION (continued)

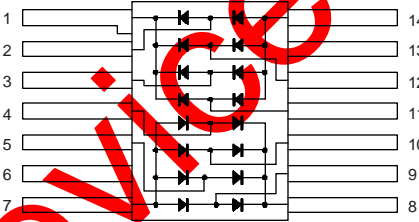Package	Part No.	Ambient Temperature Range	Connection Diagram
14-PIN CERAMIC DIP J - PACKAGE	SG6509J (1N6509)	-55°C to 150°C -55°C to 150°C	
14-PIN CERAMIC FLATPACK F - PACKAGE	SG5774F (1N5774)	-55°C to 150°C -55°C to 150°C	

Obsolete Device