

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: **0458300215**
Status: **Active**
Overview: HD Mezz Mezzanine Connector System
Description: 1.20mm by 2.00mm Pitch HD Mezz Plug, 195 Circuits, 8.00mm Unmated Height, 15 Rows, Tin (Sn) Plating

Documents:

3D Model	Product Specification PS-45802-001-001 (PDF)
Drawing (PDF)	Test Summary TS-45830-9003-001 (PDF)
3D Model (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification

CSA	LR19980
UL	E29179

General


Product Family	PCB Headers
Series	45830
3D Viewer	Yes
Application	Board-to-Board, Signal
CURRENT-MAX-NUMERIC	2.0
Comments	1.20mm Pitch Pin-to-Pin and 2.00mm Pitch Row-to-Row, 1.20mm Pitch Pin-to-Pin and 2.00mm Pitch Row-to-Row

Overview

PITCH-MATING-NUMERIC	HD Mezz Mezzanine Connector System
Product Name	1.20
UPC	HD Mezz 822350629812

Physical

Breakaway	No
Circuits (Loaded)	195
Circuits (maximum)	195
Color - Resin	Black
Durability (mating cycles max)	100
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	9.279/g
Number of Rows	15
Orientation	Vertical
PCB Locator	Yes
PCB Retention	Yes
Packaging Type	Tray
Pitch - Mating Interface	1.20mm
Pitch - Termination Interface	1.20mm
Plating min - Mating	0.762µm
Plating min - Termination	2.540µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes

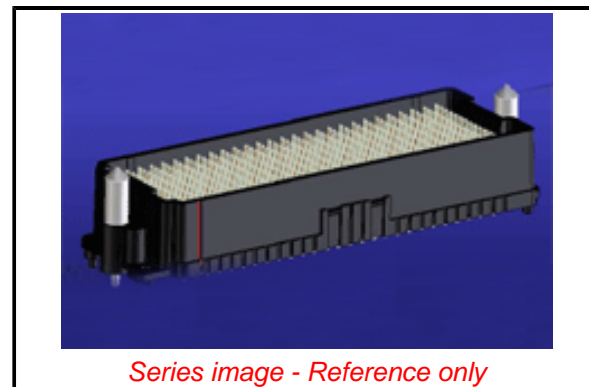

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per - ED/71/2019 (16 July 2019)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[45830](#) Series

Mates With

[45802](#) HD Mezz Receptacle

Robotic Placement	Vacuum Pick-Up Clip
Shrouded	Closed Ends
Stackable	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-55° to +105°C
Termination Interface: Style	Surface Mount
Unmated Height	8.00mm
Electrical	
Current - Maximum per Contact	2.0A
Voltage - Maximum	250V AC
Solder Process Data	
Duration at Max. Process Temperature (seconds)	020
Lead-free Process Capability	REFLOW
Max. Cycles at Max. Process Temperature	002
Process Temperature max. C	260
Material Info	
Reference - Drawing Numbers	
Electrical Model Document	EE-45802-0016
Product Specification	PS-45802-001-001
S-Parameter Model	SP-45802_45830
Sales Drawing	SD-45830-0001-001, SD-45830-0002
Test Summary	TS-45830-9003-001

This document was generated on 11/27/2019

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION