

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** **0930700002**  
**Status:** **Active**  
**Overview:** RAST 2.5 Connector System  
**Description:** Appli-Mate RAST 2.5 Header, Vertical, 3 Circuits, Tin (Sn) Plating, Glow Wire Capable, Positioning Keys B & D

**Documents:**

3D Model Packaging Specification PK-93070-001-001 (PDF)  
Drawing (PDF) RoHS Certificate of Compliance (PDF)  
Product Specification PS-93070-001-001 (PDF)

**Agency Certification**

CSA LR19980  
 UL E29179


**General**

Product Family PCB Headers  
 Series 93070  
 Application Power, Wire-to-Board  
 Comments "This Molex product is manufactured from material that has the following ratings, tested by independent agencies: a) A Glow Wire Ignition Temperature (GWIT) of at least 775 deg C per IEC 60695-2-13.. b) A Glow Wire Flammability Index (GWFI) above 850 deg C per IEC 60695-2-12.and hence complies with the requirements set out in the International Standard IEC 60335-1 5th edition - household and similar electrical appliances - safety, section 30 Resistance to heat and fire. <P><P> The customers using this product must determine its suitability for use in their particular application through testing or other acceptable means as described in end-product glow-wire flammability test standard IEC 60695-2-11 and any applicable product end-use standard(s). <P> If it is determined during the customer's evaluation of suitability, that higher performance is required, please contact Molex for possible product options."

Overview RAST 2.5 Connector System  
 Product Name RAST 2.5  
 UPC 883906320898

**Physical**

Breakaway No  
 Circuits (Loaded) 3  
 Circuits (maximum) 3  
 Color - Resin Natural  
 Durability (mating cycles max) 10  
 First Mate / Last Break No  
 Flammability 94V-0  
 Glow-Wire Compliant Yes  
 Guide to Mating Part No  
 Keying to Mating Part Yes  
 Lock to Mating Part Yes  
 Material - Metal Brass  
 Material - Plating Mating Tin  
 Material - Plating Termination Nickel  
 Material - Resin Nylon

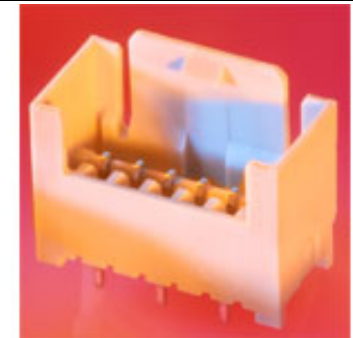

Series image - Reference only

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per - ED/30/2017 (7 July 2017)

**Halogen-Free**

**Status**

**Not Low-Halogen**

**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
 Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

**Search Parts in this Series**

93070 Series

**Mates With**

Appli-Mate RAST 2.5 Female Connector 93050 , Appli-Mate RAST 2.5 IDT Housing 91716

**Use With**

RAST Standard Interface

Net Weight	1.030/g
Number of Rows	1
Orientation	Vertical
PC Tail Length	3.30mm
PCB Locator	Yes
PCB Retention	None
PCB Thickness - Recommended	1.50mm
Packaging Type	Carton
Pitch - Mating Interface	2.50mm
Pitch - Termination Interface	2.50mm
Plating min - Mating	3.048µm
Plating min - Termination	3.048µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Fully
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-20°C to +120°C
Termination Interface: Style	Through Hole

**Electrical**

Current - Maximum per Contact	6.0A
Voltage - Maximum	32V

**Material Info****Reference - Drawing Numbers**

Packaging Specification	PK-93070-001-001
Product Specification	PS-93070-001-001
Sales Drawing	SD-93070-001

This document was generated on 08/02/2017

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**