

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0026481081](#)
Status: **Active**
Overview: [KK® Interconnect System - Molex](#)
Description: [KK® 396 Breakaway Header, Vertical, 8 Circuits, Tin \(Sn\) Plating](#)

Documents:

[3D Model](#) [Product Specification PS-08-50-001 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR19980
 UL E29179

General


Product Family PCB Headers
 Series [41661](#)
 Application Board-to-Board, Power, Wire-to-Board
 Application Tooling Part Link 11-20-0901
 Overview [KK® Interconnect System - Molex](#)
 Product Name KK® 396
 UPC 800753586543

Physical

Breakaway Yes
 Circuits (Loaded) 8
 Circuits (maximum) 8
 Color - Resin Black
 Durability (mating cycles max) 25
 First Mate / Last Break No
 Flammability 94V-0
 Glow-Wire Compliant No
 Guide to Mating Part No
 Keying to Mating Part None
 Lock to Mating Part None
 Material - Metal Brass
 Material - Plating Mating Tin
 Material - Plating Termination Tin
 Material - Resin Polyester
 Net Weight 2.273/g
 Number of Rows 1
 Orientation Vertical
 PC Tail Length 4.37mm
 PCB Locator No
 PCB Retention None
 PCB Thickness - Recommended 1.60mm
 Packaging Type Bag
 Pitch - Mating Interface 3.96mm
 Pitch - Termination Interface 3.96mm
 Polarized to Mating Part Yes
 Polarized to PCB No
 Shrouded Partial
 Stackable No
 Temperature Range - Operating See Product Specification
 Termination Interface: Style Through Hole

Electrical

Current - Maximum per Contact 7.0A

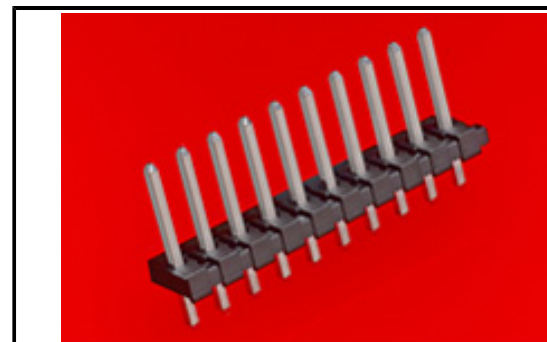

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Not Contained Per
 -ED/01/2017 (12
 January 2017)

Halogen-Free

Status

Not Low-Halogen

**Need more information on product
 environmental compliance?**

Email productcompliance@molex.com
 Please visit the [Contact Us](#) section for any
 non-product compliance questions.

China ROHS Green Image
 ELV Not Relevant
 RoHS Phthalates Not Contained

Search Parts in this Series

[41661 Series](#)

Mates With

[2139](#) KK® Crimp Housing, [41695](#) KK®
 Crimp Housing, [6442](#) KK® Crimp Housing,
[2145](#) PCB Connector, [41815](#) PCB
 Connector, [3069](#) KK® Crimp Housing

| | |
|--|------------------|
| Voltage - Maximum | 250V |
| Solder Process Data | |
| Duration at Max. Process Temperature (seconds) | 005 |
| Lead-free Process Capability | WAVE |
| Max. Cycles at Max. Process Temperature | 001 |
| Process Temperature max. C | 235 |
| Material Info | |
| Engineering Number | A-41661-A08A197 |
| Reference - Drawing Numbers | |
| Product Specification | PS-08-50-001 |
| Sales Drawing | SD-41661-001-002 |

This document was generated on 07/24/2017

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION