MICRO SWITCH
FREEPORT, ILLINOIS, U S A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

ASSEMBLY– TOGGLE SWITCH

CATALOG LISTING
13AT402–T2

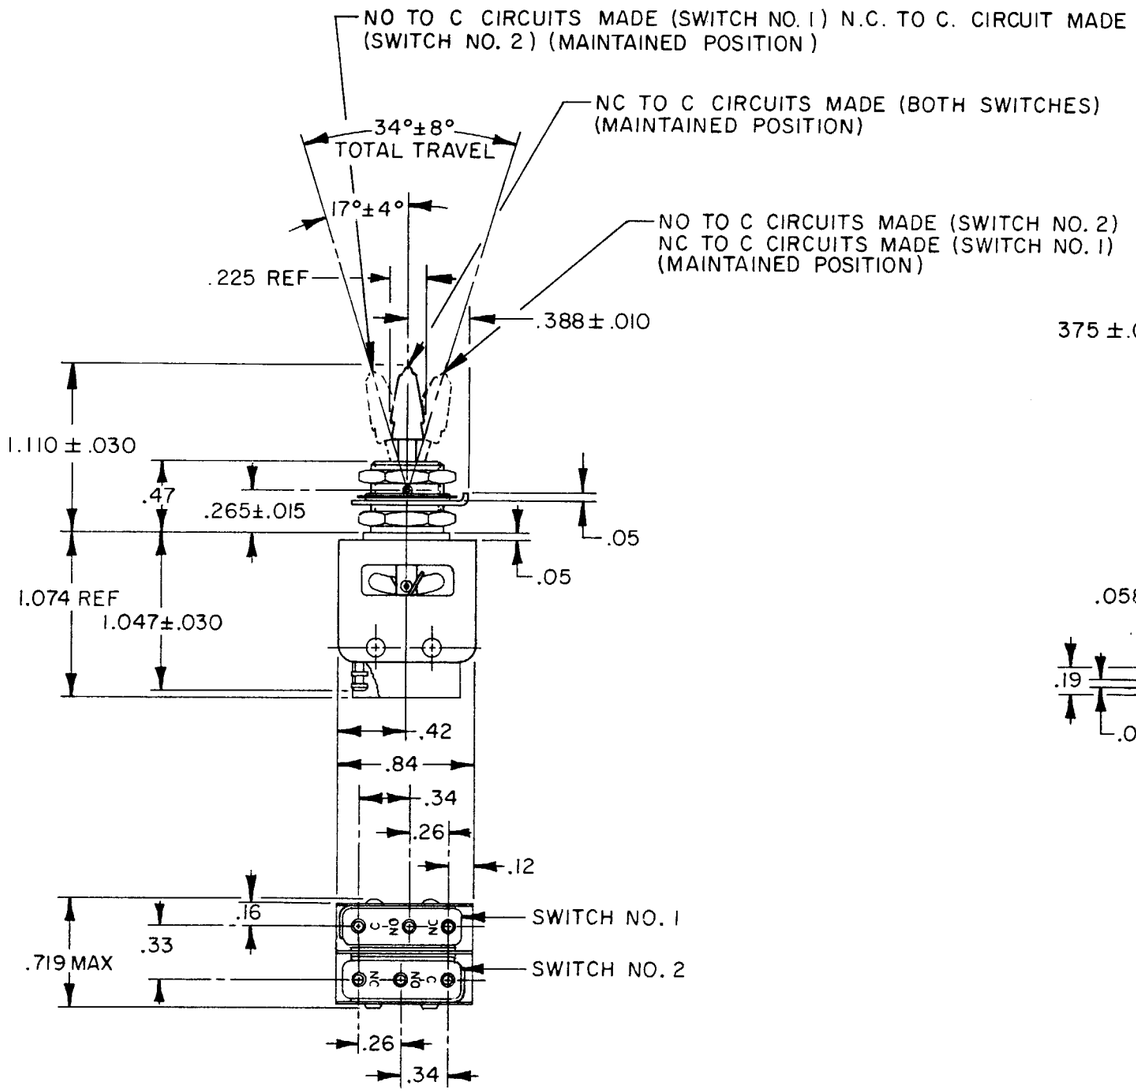

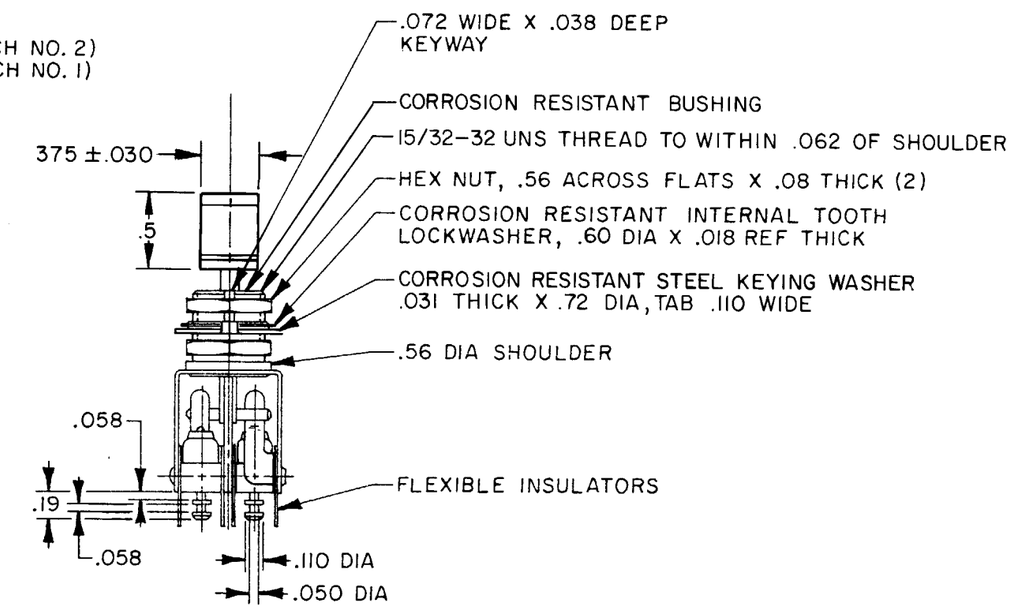

NOTES
1 - UNIT INCLUDES CATALOG LISTING 1SM1-T2 TYPE BASIC SWITCH (2)
2 - TERMINALS ARE PLATED FOR SOLDERING
3 - KNOB PORTION OF TOGGLE LEVER BRIGHT ANODIZED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CHARACTERISTICS

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T (2)

250 VAC — — — — — — — — — — — — — — 5 AMP
30 VOLTS DC RATING
INDUCTIVE — SEA LEVEL — — — — 3 AMP
50,000 FT. — — — — 2.5 AMP
RESISTIVE — — — — SEA LEVEL — — — — 5 AMP
50,000 FT. — — — — 5 AMP
MAXIMUM INRUSH — — — — — — — — — 24 AMP

SCALE FULL
DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

	DIM. mm	TOL. mm/in	DIM. in	TOL. mm/in
NO PLACES	X	1/.04		
ONE PLACE	X.X	0.4/.016	X.X	0.8/.03
TWO PLACES	X.XX	0.15/.006	X.XX	0.38/.015
THREE PLACES			X.XXX	0.13/.005
ANGLES				

DESIGN UNITS SI METRIC ☐ US CUSTOMARY ■

THIRD ANGLE PROJECTION

WEIGHT .06 LB APPROX

REVISIONS
A C052725 J A P 3 JUN 83
B C056281 G J W 27 SEP 85
C C066089 D A W 21 FEB 91

DRAWING NUMBER M 13AT402–T2
RELEASE NO. SR 8769
REPLACES
ISSUE 7
CHECK
DRAWN J A P 3 JUN 83
FO-8285 1-B