FO-50360-L

CW-B0254

REV	DOCUMENT	CHANGED BY	CHECK
6	202369	TSM 12FEB01	SAV

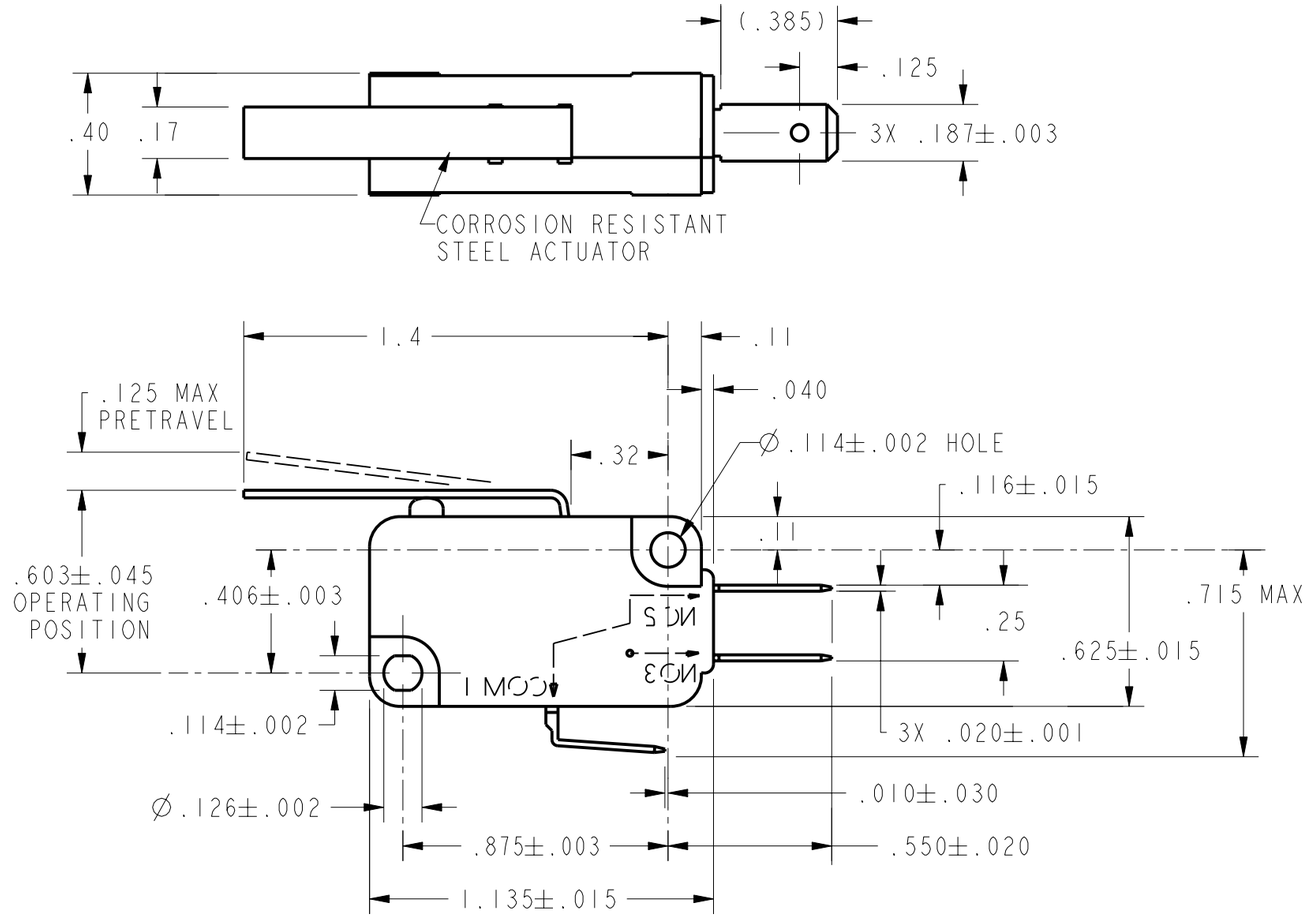

CHARACTERISTICS	
OPERATING FORCE	82 GRAMS MAX
RELEASE FORCE	8 GRAMS MIN
DIFFERENTIAL TRAVEL	.028 MAX
OVERTRAVEL	.070 MIN
RELEASE TRAVEL	.017 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L162
5A 125, 250, 277 VAC
1/10HP 250 VAC

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE: [X] US(inch) CUSTOMARY [ ] SI(mm) METRIC

		US(inch) CUSTOMARY	SI(mm) METRIC
NO PLACE	X	±.040	±1
ONE PLACE	.X	±.030	±0,4
TWO PLACE	.XX	±.015	±0,15
THREE PLACE	.XXX	±.005	±
ANGLES		±	±

RAW MATERIAL-COMMERCIAL STANDARD

THIRD ANGLE PROJECTION

DRAWN	TSM	12FEB01
CHECK	SAV	12FEB01

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL SENSING AND CONTROL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.

DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED

PTC 2D | ASME Y14.5M-1994

Honeywell
Sensing and Control

TITLE
SWITCH, BASIC

SIZE	DWG TYPE	DRAWING NAME	REV
B	M	V7-1A17D8-022	6

SCALE 2 : 1 | WEIGHT | SHEET 1 OF 1