

D-Sub Connectors


XM3

XM3 Series

D-Sub Connectors That Are Ideal for Office Equipment Interfaces

- Shielded against EMI.
- Compact, robust connectors with metal shells.
- Anchors and Grounding Fixtures are available.

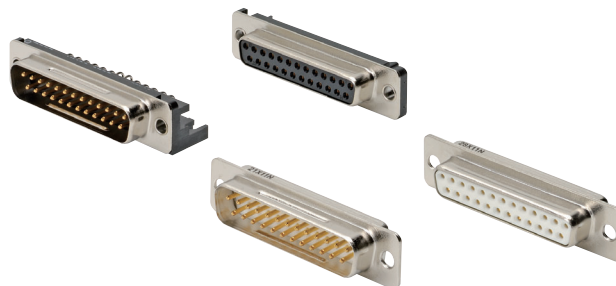RoHS Compliant




Slim Models Join the XM2-L/XM3-L Series

Refer to page 7 for detailed specifications.



XM3B-LS

Space-saving 9-pin Slim D-sub Socket Connectors for Boards

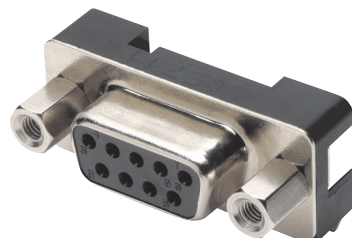- Board mounting area is reduced by 33% (compared with previous models) using depth of 8.4 mm.
- D-sub sockets with nine right-angle DIP terminals.
- Mounting board thickness of either 1.6 mm or 1.0 mm (from difference in lock pin structure).







NEW

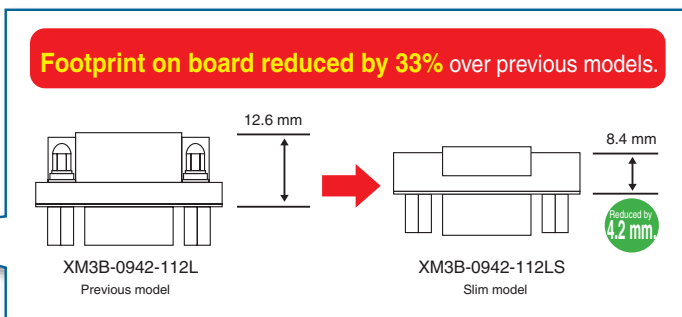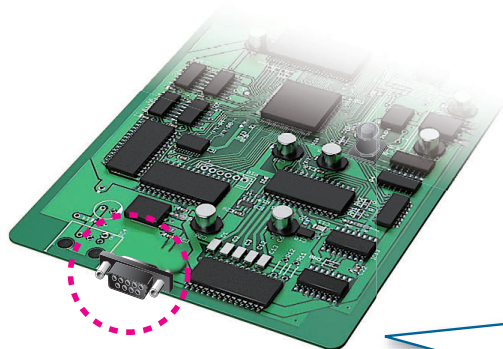

XM3 Series

Connectors

Model	XM3C	XM3F	XM3A	XM3D
Appearance	Plugs with Right-angle DIP Terminals 	Sockets with Straight DIP Terminals 	Plugs with Solder Cup Terminals 	Sockets with Solder Cup Terminals 

Ratings and Characteristics

Item	Model Plugs with Solder Cup Terminals: XM3A Plugs with Right-angle DIP Terminals: All XM3C models except those with 37 pins XM3C-0922-□□□ XM3C-1522-□□□ XM3C-2522-□□□ Sockets with Solder Cup Terminals: XM3D Sockets with Straight DIP Terminals: XM3F	Plugs with Right-angle DIP Terminals: XM3C models with 37 pins XM3C-3722-□□□
Rated current	5 A	3 A
Rated voltage	300 VAC	
Contact resistance	15 mΩ max. (at 20 mVDC, 100 mA max.)	
Insulation resistance	1,000 MΩ min. (at 500 V DC)	
Withstand voltage	1,000 VAC for 1 min (leakage current: 1 mA max.)	
Total insertion force	Number of pins × 3.33 N max	
Individual pull-out force	0.29 N min. (for gauge diameter of 0.99 mm)	
Insertion durability	200 times	
Operating temperature	-55°C to 105°C (with no icing)	
Shield effectiveness (electrical field method)	Mounted in panel: 25 dB min. (30 to 900 MHz) Mounted on board: 20 dB min. (30 to 300 MHz)	

Materials and Finish

Item	Model	XM3C	XM3F	XM3A	XM3D
Housing		Fiber-glass reinforced PBT resin (UL94V-0)/black		Fiber-glass reinforced PBT resin (UL94V-0)/Milky white	
Contacts	Mating end	Phosphor bronze/nickel base, gold plated (0.4 μm)		Bronze/nickel base, gold plated (0.4 μm)	Phosphor bronze/nickel base, gold plated (0.4 μm)
	Terminals	Phosphor bronze/nickel base, tin plated (3 μm)		Bronze/nickel base, tin plated (3 μm)	Phosphor bronze/nickel base, tin plated (3 μm)
Shell		Steel/nickel			

Applicable Wires

The applicable wires for solder cup terminals are AWG 22 to 28 (solid or stranded).

XM3C Plugs with Right-angle DIP Terminals

Model Number Legend

XM3C-□□22-□□□
 1 2 3

1 Anchor Type

- 1: Anchor 2
- 5: No anchors

2 Anchor Screw Specifications

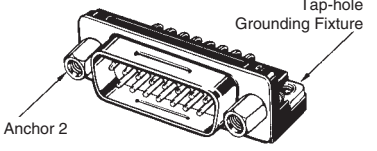
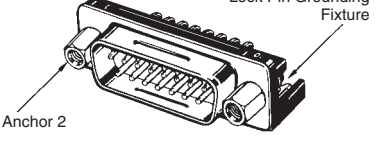
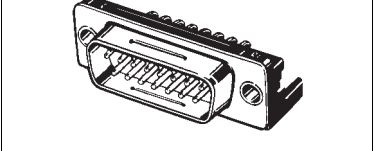
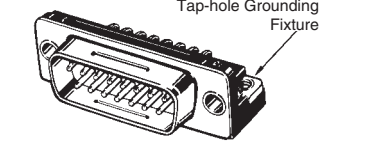
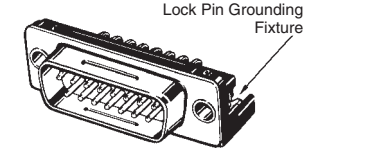
- 1: M2.6 x 0.45 metric screws
- 3: Inch screws
- 0: No anchors

3 Grounding Fixture

- 1: Tap-hole Grounding Fixture
- 2: Lock Pin Grounding Fixture

Note: If 1, 2, or 3 are omitted in the model number, then no Anchor or Grounding Fixture is included.

Ordering Information

Appearance	Anchor 2 and Tap-hole Grounding Fixture	Anchor 2 and Lock Pin Grounding Fixture	No Anchor or Grounding Fixture	Minimum ordering quantity (pieces)
				
Accessories	Anchor 2: XM2Z-0011 (M2.6 x 0.45 metric screws)		---	
No. of contacts	Tap-hole Grounding Fixture	Lock Pin Grounding Fixture	---	
9	XM3C-0922-111	XM3C-0922-112	XM3C-0922	90
15	XM3C-1522-111	XM3C-1522-112	XM3C-1522	70
25	XM3C-2522-111	XM3C-2522-112	XM3C-2522	50
37	XM3C-3722-111	XM3C-3722-112	XM3C-3722	40
Appearance	No Anchor and Tap-hole Grounding Fixture	No Anchor and Lock Pin Grounding Fixture	Minimum ordering quantity (pieces)	
				
Accessories	No anchors			
No. of contacts	Tap-hole Grounding Fixture	Lock Pin Grounding Fixture		
9	XM3C-0922-501	XM3C-0922-502	90	
15	XM3C-1522-501	XM3C-1522-502	70	
25	XM3C-2522-501	XM3C-2522-502	50	
37	XM3C-3722-501	XM3C-3722-502	40	

Note: Also available as standard models are the XM3C-□□22-111/-112 with Anchor 2 (M 2.6 x 0.45) and Grounding Fixture, as well as the XM3C-□□22-501/502 with Grounding Fixture and no Anchor.
 The enclosed Tap-hole Grounding Fixture is two M3 x 0.5, and the Lock Pin Grounding Fixture is M3 x 0.5 on the Anchor side.

■Dimensions

(Unit: mm)

●Right-angle DIP Terminals


XM3C-□□22 (No Anchor or Grounding Fixture)

XM3C-□□22-501 (No Anchor, Tap-hole Grounding Fixture Included)

XM3C-□□22-502 (No Anchor, Long Pin Grounding Fixture Included)



XM3C-□□22-111 (Anchor 2, Tap-hole Grounding Fixture Included)

XM3C-□□22-112 (Anchor 2, Long Pin Grounding Fixture Included)



The above illustration is for the 25-pin model (no Anchor or Grounding Fixture).

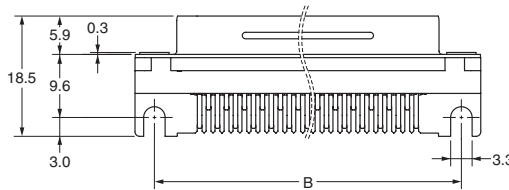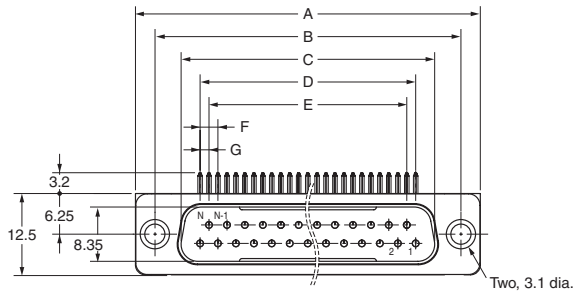Note: The XM3C is produced based on JIS X5101. The pin pitch is in a mixed arrangement of 2.77 mm and 2.74 mm following JIS standards (for 25-pin and 37-pin models). A uniform pitch of 2.76 mm, however, is recommended for the mounting holes. A board processed using a pin pitch of 2.76 mm will have sufficient margin and pose no practical problems.



**Mounting Holes
(t=1.6mm, Bottom View)**

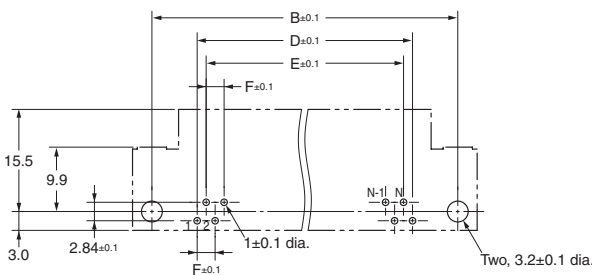


Table of Dimensions

Dimensions (mm)	A	B	C	D	E	F	G
No. of contacts							
9	30.8	24.99	16.91	10.96	8.22	2.74	1.37
15	39.1	33.32	25.25	19.18	16.44	2.74	1.37
25	53.0	47.04	38.96	33.12	30.36	2.76	1.38
37	69.3	63.50	55.42	49.68	46.92	2.76	1.38