

Device connector, front mounting - ST-3ES1N8A6100S



1613546

<https://www.phoenixcontact.com/au/products/1613546>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Device connector, front mounting, straight, for standard and SPEEDCON interlock, M17, number of positions: 3+PE, type of contact: Socket, Axial O-ring, Central fixing, shielded: yes, degree of protection: IP67, number of positions: 4, connection method: Crimp connection, series: ST

Your advantages

- Application-specific wall mounting optionally with thread or anti-rotation protection and lock nut
- Consistent EMC protection for reliable connection solutions in the industrial environment
- Crimping connection: vibration- and temperature-resistant assembly

Device connector, front mounting - ST-3ES1N8A6100S



1613546

<https://www.phoenixcontact.com/au/products/1613546>

Commercial Data

Item number	1613546
Packing unit	1 pc
Minimum order quantity	1 pc
Sales Key	ABRCAJ
Product Key	ABRCAJ
Catalog Page	Page 139 (C-2-2019)
GTIN	4046356400978
Weight per Piece (including packing)	33.022 g
Weight per Piece (excluding packing)	33.022 g
Customs tariff number	85366990
Country of origin	DE

Technical Data

Notes

Order information:	Order crimp contacts Ø 2 mm separately
--------------------	--

Safety note

Safety note	<p>WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.</p>
	<ul style="list-style-type: none"> • WARNING: Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible.
	<ul style="list-style-type: none"> • WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.
	<ul style="list-style-type: none"> • The products are suitable for applications in plant, controller, and electrical device engineering.
	<ul style="list-style-type: none"> • When operating the connectors in outdoor applications, they must be separately protected against environmental influences.
	<ul style="list-style-type: none"> • Assembled products may not be manipulated or improperly opened.
	<ul style="list-style-type: none"> • Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products).
	<ul style="list-style-type: none"> • When using the product in direct connection with third-party manufacturers, the user is responsible.
	<ul style="list-style-type: none"> • For operating voltages > 50 V AC, conductive connector housings must be grounded
	<ul style="list-style-type: none"> • Ensure that the protective or functional ground has been properly connected.
	<ul style="list-style-type: none"> • VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector
	<ul style="list-style-type: none"> • Only use tools recommended by Phoenix Contact
	<ul style="list-style-type: none"> • The installation notes/Design In documents online on the download page at phoenixcontact.com/products must be observed for this product.
	<ul style="list-style-type: none"> • Operate the connector only when it is fully plugged in and interlocked.
<ul style="list-style-type: none"> • Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards. 	
<ul style="list-style-type: none"> • Observe the minimum bending radius of the cable. Lay the cable without twisting it. 	
<ul style="list-style-type: none"> • The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting 	

Device connector, front mounting - ST-3ES1N8A6100S



1613546

<https://www.phoenixcontact.com/au/products/1613546>

warnings (e.g. DIN EN ISO 13732-1:2008-12).

Product properties

Product type	Circular connectors (device side)
Number of positions	4
Connection profile	3+PE
Application	Power
Locking type	for standard and SPEEDCON interlock
Series	ST
Shielded	yes
Coding	N
Thread type	M17

Ambient conditions

Degree of protection	IP67
Ambient temperature (operation)	-40 °C ... 125 °C
Altitude	3000 m

Connector

Type	straight
Direction of rotation	Standard

Electrical properties

Contact

Contact diameter	2 mm
Max. current	25 A
Nominal voltage U_N	630 V
Overvoltage category	III
Rated surge voltage	6 kV

Contact

Contact diameter	2 mm
------------------	------

Material specifications

Seal material	FPM
---------------	-----

Connection data

Conductor connection

Connection method	Crimp connection
-------------------	------------------

Mounting

Mounting	Central fixing
----------	----------------

Device connector, front mounting - ST-3ES1N8A6100S




1613546

<https://www.phoenixcontact.com/au/products/1613546>


Drawings

Dimensional drawing

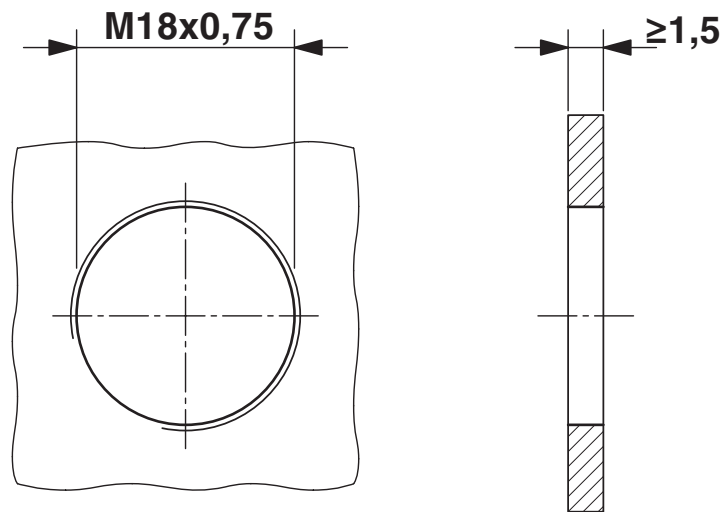


Installation dimensions: mounting with thread

Schematic diagram

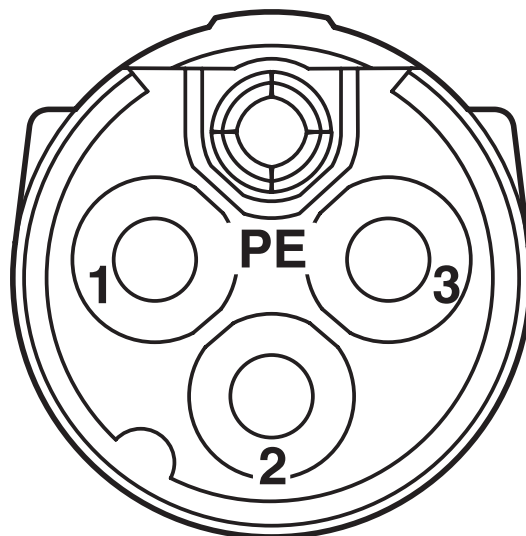


Connector pin assignment

Diagram

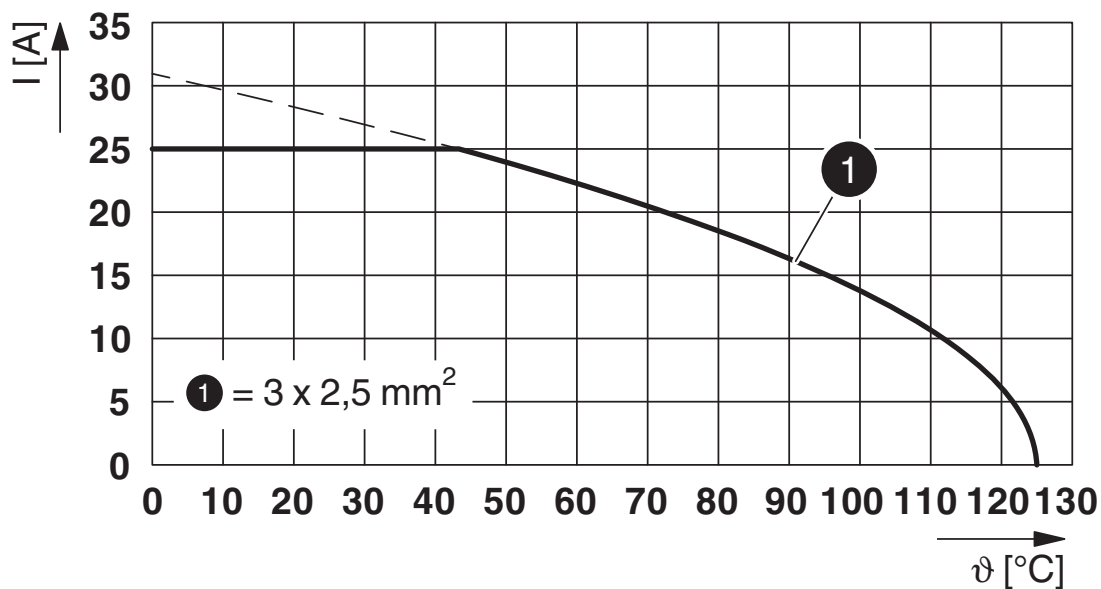

I = current strength, ϑ = ambient temperature, 3x 25 A

Dimensional drawing

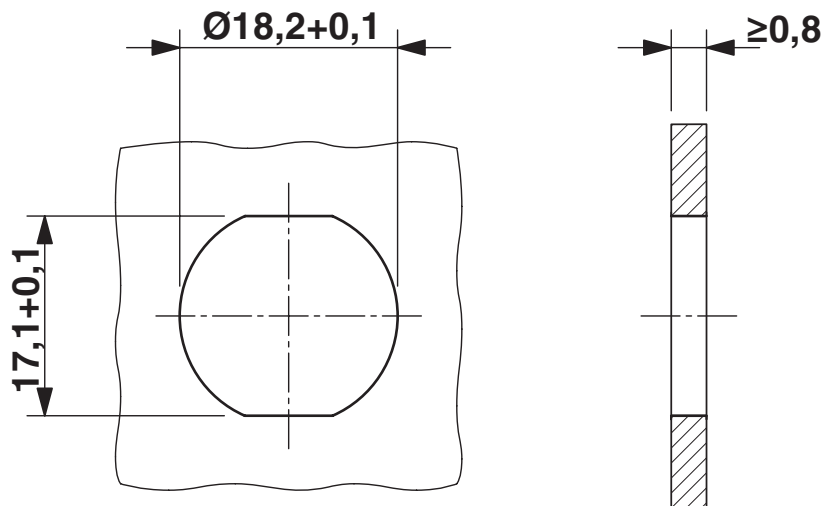

Installation dimensions: mounting with anti-rotation protection and locking nut


Device connector, front mounting - ST-3ES1N8A6100S



1613546

<https://www.phoenixcontact.com/au/products/1613546>

Dimensional drawing

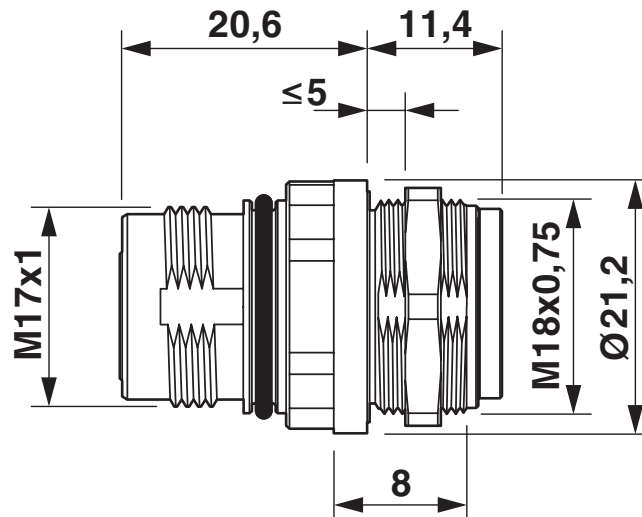


Device connector, front mounting - ST-3ES1N8A6100S




1613546

<https://www.phoenixcontact.com/au/products/1613546>


Approvals

 cUL Listed Approval ID: E468743-20210825				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
Power	600 V	18 A	- 14	-

 cUL Recognized Approval ID: FILE E 335019				
---	--	--	--	--

 UL Recognized Approval ID: FILE E 335019				
--	--	--	--	--

 EAC Approval ID: B.01687				
---	--	--	--	--

 UL Listed Approval ID: E468743-20210825				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
Power	600 V	20 A	-	- 14

 UL Recognized Approval ID: E153698-20140124				
---	--	--	--	--

 cUL Recognized Approval ID: E153698-20140124				
--	--	--	--	--

cULus Listed				
---------------------	--	--	--	--

Device connector, front mounting - ST-3ES1N8A6100S



1613546

<https://www.phoenixcontact.com/au/products/1613546>

Classifications

ECLASS

ECLASS-9.0	27440102
ECLASS-10.0.1	27440102
ECLASS-11.0	27440102

ETIM

ETIM 8.0	EC002635
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

Device connector, front mounting - ST-3ES1N8A6100S



1613546

<https://www.phoenixcontact.com/au/products/1613546>

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

1613546

<https://www.phoenixcontact.com/au/products/1613546>

Accessories

Crimp contact

Crimp contact - ST-20KS010 - 1607657

<https://www.phoenixcontact.com/au/products/1607657>



Crimp contact, turned, contact diameter: 2 mm, crimp range: 0.25 mm² ... 1 mm²

Crimp contact

Crimp contact - ST-20KS020 - 1607658

<https://www.phoenixcontact.com/au/products/1607658>



Crimp contact, turned, Single contact, contact diameter: 2 mm, crimp range: 1 mm² ... 2.5 mm²

1613546

<https://www.phoenixcontact.com/au/products/1613546>

Protective cap

Protective cap - ST-Z0006 - 1607776

<https://www.phoenixcontact.com/au/products/1607776>



Plastic protection cap for connectors with M17 external thread

Color-coding

Color-coding - ST-Z0019 - 1620621

<https://www.phoenixcontact.com/au/products/1620621>



Color-coding, color: green

1613546

<https://www.phoenixcontact.com/au/products/1613546>

Color-coding

Color-coding - ST-Z0020 - 1620622

<https://www.phoenixcontact.com/au/products/1620622>

Color-coding, color: orange



Color-coding

Color-coding - ST-Z0021 - 1620623

<https://www.phoenixcontact.com/au/products/1620623>

Color-coding, color: black



Device connector, front mounting - ST-3ES1N8A6100S



1613546

<https://www.phoenixcontact.com/au/products/1613546>

M18 x 0.75 locking nut

M18 x 0.75 locking nut - ST-E2015151 - 1613831

<https://www.phoenixcontact.com/au/products/1613831>

M18 x 0.75 locking nut, series: ST



Contact removal tool

Contact removal tool - ST-Z0001 - 1607770

<https://www.phoenixcontact.com/au/products/1607770>

Unlocking tool for contact carriers for snapping in the M17 device connectors



1613546

<https://www.phoenixcontact.com/au/products/1613546>

Metal protective cap

Metal protective cap - ST-Z0014 - 1616069

<https://www.phoenixcontact.com/au/products/1616069>

Metal protection cap for connectors with M17 external thread



Metal protective cap

Metal protective cap - ST-Z0013 - 1616068

<https://www.phoenixcontact.com/au/products/1616068>

Metal protection cap with steel wire for connectors with M17 external thread



Phoenix Contact 2022 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT PTY Ltd
Unit 7, 2-8 South Street
Rydalmere NSW 2116
1300 786 411
customerservice@phoenixcontact.com.au