

Protective covers - HC-B 16-SD-FL/FS - 1660151


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Protective cover B16, for single locking latch, protective cover material: PA, height: 18.5 mm, seal: no, With lanyard, diameter of retaining cord eyelet: 30 mm



Key Commercial Data

Packing unit	1 STK
Minimum order quantity	10 STK
GTIN	 4 017918 021894
GTIN	4017918021894
Weight per Piece (excluding packing)	33.530 g
Custom tariff number	85389099
Country of origin	Germany

Technical data

Dimensions

Length	97 mm
Width	46 mm
Height	18.5 mm
Diameter of retaining cord eyelet	30 mm

Ambient conditions

Degree of protection	IP66
Ambient temperature (operation)	-20 °C ... 100 °C

General

Size	B16
------	-----

Protective covers - HC-B 16-SD-FL/FS - 1660151

Technical data

General

Type	For supporting base element with single locking latch
Material	PA
Flammability rating according to UL 94	HB
Color	gray
Seal present	no
Connection	Plastic protective cover for short-term protection

Standards and Regulations


Flammability rating according to UL 94	HB
--	----

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Dimensional drawing

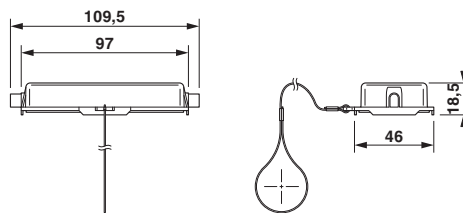

Dimensional drawing

Classifications

eCl@ss

eCl@ss 4.0	27140816
eCl@ss 4.1	27140816
eCl@ss 5.0	27143424
eCl@ss 5.1	27143424
eCl@ss 6.0	27143424
eCl@ss 7.0	27440209
eCl@ss 8.0	27440208
eCl@ss 9.0	27440208

ETIM

ETIM 2.0	EC000437
----------	----------

Protective covers - HC-B 16-SD-FL/FS - 1660151

Classifications

ETIM

ETIM 3.0	EC000437
ETIM 4.0	EC000437
ETIM 5.0	EC002314
ETIM 6.0	EC002314

UNSPSC

UNSPSC 6.01	30212113
UNSPSC 7.0901	39121712
UNSPSC 11	39121712
UNSPSC 12.01	39121712
UNSPSC 13.2	39121421

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC		RU C- DE.AI30.B.01102
-----	---	--------------------------
