

# PCB terminal block - FRONT 2,5-H/SA 5/ 9 - 1744109

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




PCB terminal block, nominal current: 24 A, rated voltage (III/2): 400 V, nominal cross section: 2.5 mm<sup>2</sup>, pitch: 5 mm, number of positions: 9, connection method: Front screw connection, mounting: Wave soldering, conductor/PCB connection direction: 0 °, color: green, Pin layout: Linear double pinning, Solder pin [P]: 4.3 mm. The article can be aligned to create different nos. of positions!


The figure shows the 10-position version

## Your advantages

- ✓ Well-known connection principle allows worldwide use
- ✓ Low temperature rise, thanks to maximum contact force
- ✓ Allows connection of two conductors
- ✓ Operation and conductor connection from one direction enable integration into front of device
- ✓ Two solder pins reduce the mechanical strain on the soldering spots
- ✓ The latching on the side enables various numbers of positions to be combined

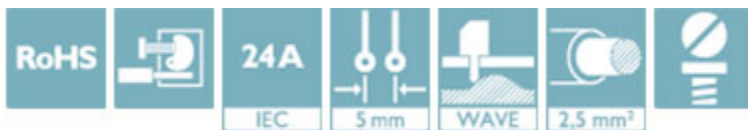

## Key Commercial Data

|                                      |   |
|--------------------------------------|---|
| Packing unit                         | 1 pc  |
| Minimum order quantity               | 20 pc   |
| GTIN                                 | <br>4 046356 304535 |
| GTIN                                 | 4046356304535   |
| Weight per Piece (excluding packing) | 33.000 g  |
| Custom tariff number                 | 85369010  |
| Country of origin                    | Germany   |

## Technical data

### Item properties

|                           |                    |
|---------------------------|--------------------|
| Brief article description | PCB terminal block |
| Range of articles         | FRONT 2,5-H/SA 5   |

## PCB terminal block - FRONT 2,5-H/SA 5/ 9 - 1744109

### Technical data

#### Item properties

|                       |                        |
|-----------------------|------------------------|
| Pitch                 | 5 mm                   |
| Number of positions   | 9                      |
| Connection method     | Front screw connection |
| Drive form screw head | Slotted                |
| Screw thread          | M2,5                   |
| Mounting type         | Wave soldering         |
| Pin layout            | Linear double pinning  |
| Number of levels      | 1                      |
| Number of connections | 9                      |
| Number of potentials  | 9                      |

#### Electrical parameters

|              |       |
|--------------|-------|
| Nom. voltage | 400 V |
|--------------|-------|

#### Connection capacity

|   |   |
|---|---|
| Connection method   | Front screw connection                        |
| pluggable   | Yes   |
| Conductor cross section solid   | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>   |
| Conductor cross section flexible  | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>   |
| Conductor cross section AWG / kcmil   | 24 ... 14                                     |
| Conductor cross section flexible, with ferrule without plastic sleeve           | 0.25 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>  |
| Conductor cross section, flexible, with ferrule, with plastic sleeve            | 0.25 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>  |
| 2 conductors with same cross section, solid                                     | 0.2 mm <sup>2</sup> ... 0.75 mm <sup>2</sup>  |
| 2 conductors with same cross section, flexible                                  | 0.2 mm <sup>2</sup> ... 0.75 mm <sup>2</sup>  |
| 2 conductors with same cross section, stranded, ferrules without plastic sleeve | 0.25 mm <sup>2</sup> ... 0.34 mm <sup>2</sup> |
| Stripping length  | 9 mm  |
| Torque  | 0.4 Nm ... 0.5 Nm                             |

#### Material data - contact

|  |   |
|--|---|
| Note                                     | WEEE/RoHS-compliant, free of whiskers according to IEC 60068-2-82/ JEDEC JESD 201 |
| Contact material                         | Cu alloy  |
| Surface characteristics                  | hot-dip tin-plated  |
| Metal surface terminal point (top layer) | Tin (5 - 7 µm Sn)   |
| Metal surface soldering area (top layer) | Tin (5 - 7 µm Sn)   |

#### Material data - housing

|                           |    |
|---------------------------|----|
| Insulating material       | PA |
| Insulating material group | I  |

# PCB terminal block - FRONT 2,5-H/SA 5/ 9 - 1744109

## Technical data

### Material data - housing

|   |        |
|---|--------|
| CTI according to IEC 60112  | 600    |
| Flammability rating according to UL 94                            | V0     |
| Glow wire flammability index GWFI according to EN 60695-2-12      | 850    |
| Glow wire ignition temperature GWIT according to EN 60695-2-13    | 775    |
| Temperature for the ball pressure test according to EN 60695-10-2 | 125 °C |

### Dimensions for the product

|                             |   |
|-----------------------------|---|
| Caption                     | Schematic representation – for additional information, see product range drawing in the Download Center |
| Length [ l ]                | 19.5 mm   |
| Width [ w ]                 | 47.5 mm   |
| Height [ h ]                | 22.1 mm   |
| Pitch                       | 5 mm  |
| Height (without solder pin) | 18.5 mm   |
| Solder pin [P]              | 4.3 mm  |
| Pin spacing                 | 5 mm  |
| Pin dimensions              | 0.8 x 0.8 mm  |
| Dimension a                 | 40 mm   |

### Dimensions for PCB design

|               |        |
|---------------|--------|
| Hole diameter | 1.2 mm |
| Pin spacing   | 5 mm   |

### Packaging information

|                            |                     |
|----------------------------|---------------------|
| Type of packaging          | packed in cardboard |
| Pieces per package         | 20                  |
| Denomination packing units | Pcs.                |

### Ambient conditions

|   |   |
|---|---|
| Ambient temperature (storage/transport) | -40 °C ... 70 °C  |
| Ambient temperature (assembly)          | -5 °C ... 100 °C  |
| Ambient temperature (operation)         | -40 °C ... 100 °C (Depending on the current carrying capacity/derating curve) |

### Termination and connection method

|  |                     |
|--|---------------------|
| Test for conductor damage and slackening | IEC 60999-1:1999-11 |
|  | Test passed         |

### Pull-out test

|               |                     |
|---------------|---------------------|
| Pull-out test | IEC 60999-1:1999-11 |
|               | Test passed         |

# PCB terminal block - FRONT 2,5-H/SA 5/ 9 - 1744109

## Technical data

### Pull-out test

|  |   |
|--|---|
| Conductor cross section / conductor type / tensile force | 0.2 mm <sup>2</sup> / solid / > 10 N    |
|  | 0.2 mm <sup>2</sup> / flexible / > 10 N |
|  | 2.5 mm <sup>2</sup> / flexible / > 50 N |
|  | 2.5 mm <sup>2</sup> / solid / > 50 N    |

### Electrical tests

|                             |                     |
|-----------------------------|---------------------|
| Rated current               | 24 A                |
| Conductor cross section     | 2.5 mm <sup>2</sup> |
| Rated voltage (III/2)       | 400 V               |
| Rated surge voltage (III/2) | 4 kV                |

### Air clearances and creepage distances

|   |   |
|---|---|
| Clearances and creepage distances               | IEC 60947-1:2007-06 + A1:2010-12 + A2:2014-09 |
| Specification                                   | IEC 60947-1:2007-06 + A1:2010-12 + A2:2014-09 |
| Rated insulation voltage (III/3)                | 250 V   |
| Rated insulation voltage (III/2)                | 400 V   |
| Rated insulation voltage (II/2)                 | 630 V   |
| Rated surge voltage (III/3)                     | 4 kV  |
| Rated surge voltage (III/2)                     | 4 kV  |
| Rated surge voltage (II/2)                      | 4 kV  |
| Minimum clearance - inhomogeneous field (III/3) | 3 mm  |
| Minimum clearance - inhomogeneous field (III/2) | 3 mm  |
| Minimum clearance - inhomogeneous field (II/2)  | 3 mm  |
| Minimum creepage distance value (III/3)         | 3.2 mm  |
| Minimum creepage distance value (III/2)         | 3 mm  |
| Minimum creepage distance value (II/2)          | 3.2 mm  |

### Current carrying capacity / derating curves

### Vibration test

|                        |                        |
|------------------------|------------------------|
| Specification          | IEC 60068-2-6:2007-12  |
| Result                 | Test passed            |
| Frequency              | 10 - 150 - 10 Hz       |
| Sweep speed            | 1 octave/min           |
| Amplitude              | 0.35 mm (10 - 60.1 Hz) |
| Test duration per axis | 2.5 h                  |

### Standards and Regulations

|  |        |
|--|--------|
| Connection in acc. with standard       | EN-VDE |
| Flammability rating according to UL 94 | V0     |

# PCB terminal block - FRONT 2,5-H/SA 5/ 9 - 1744109


## Technical data

### Environmental Product Compliance

|            |   |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |


## Drawings

Drilling diagram

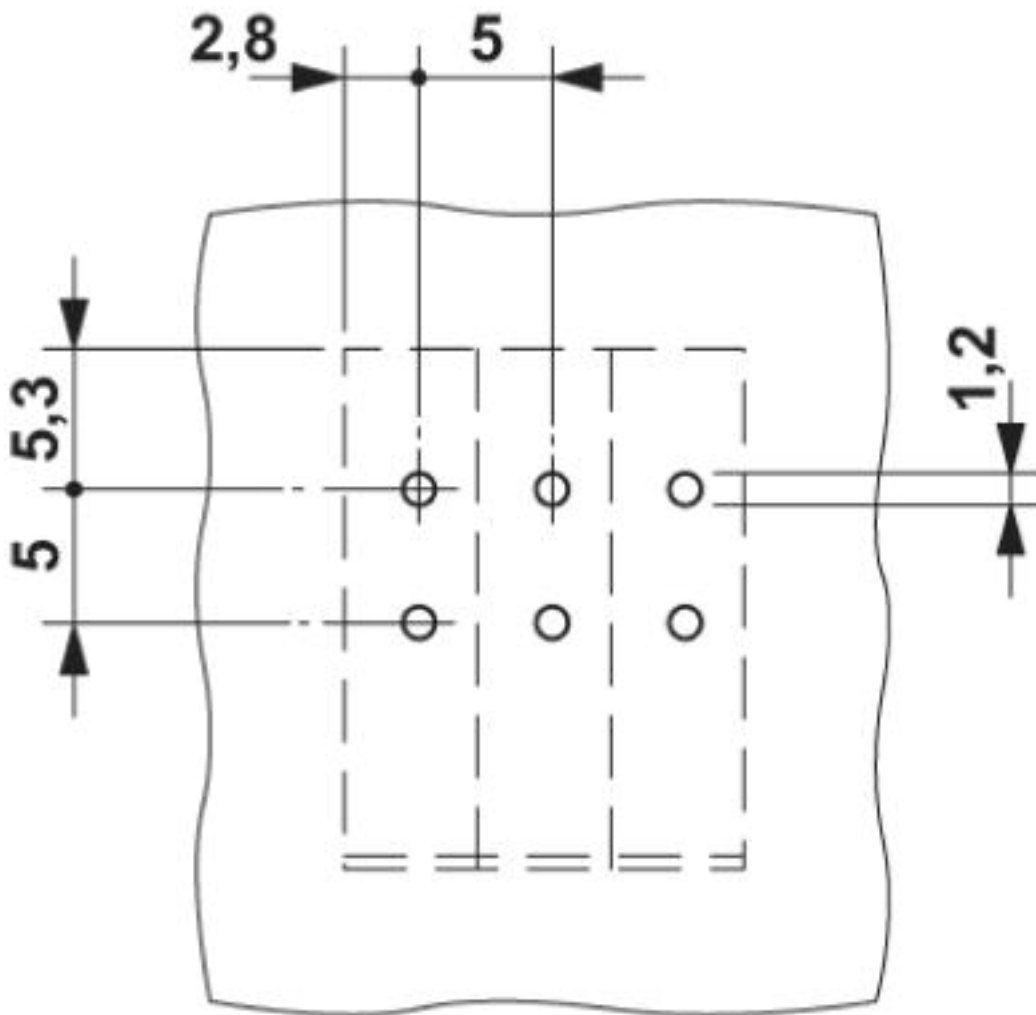


# PCB terminal block - FRONT 2,5-H/SA 5/ 9 - 1744109

Diagram

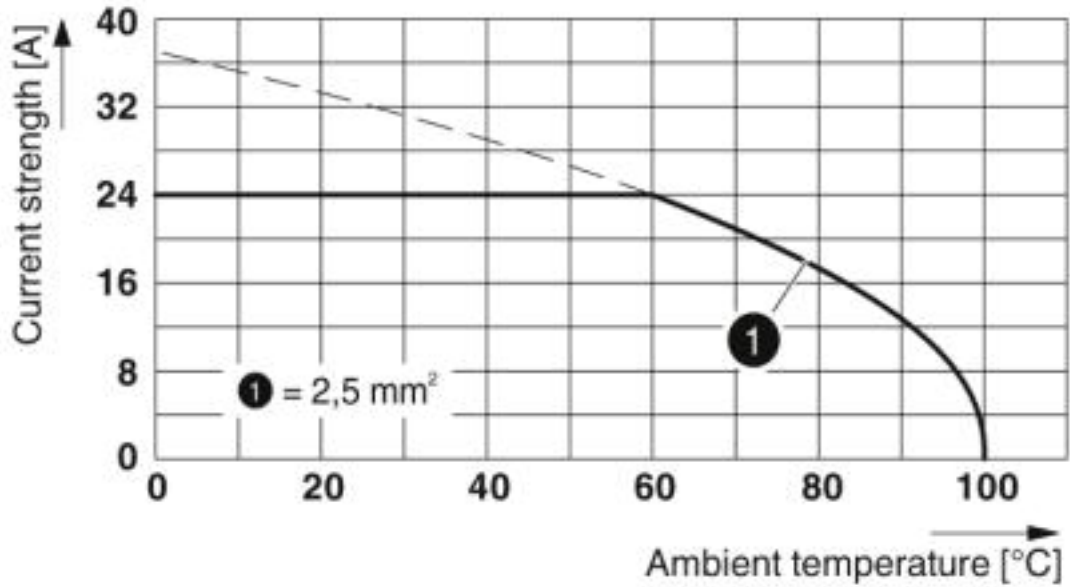

Dimensional drawing

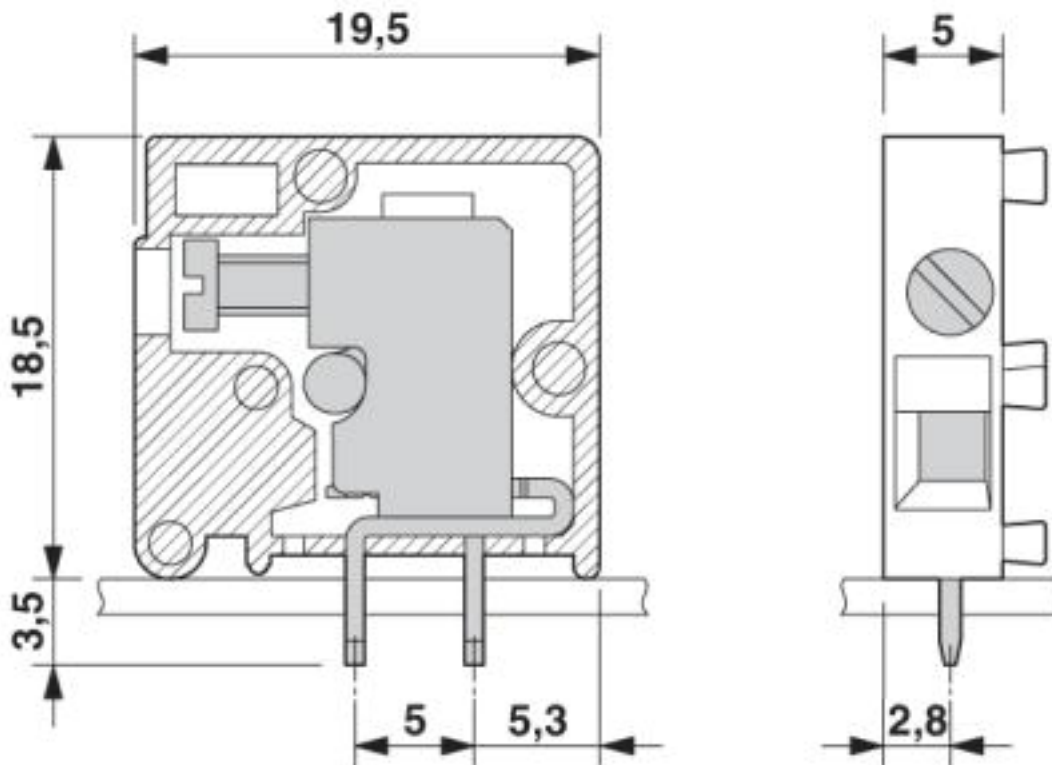

# PCB terminal block - FRONT 2,5-H/SA 5/ 9 - 1744109

## Classifications

### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27141100 |
| eCl@ss 4.1 | 27141100 |
| eCl@ss 5.0 | 27141100 |
| eCl@ss 5.1 | 27261100 |
| eCl@ss 6.0 | 27261100 |
| eCl@ss 7.0 | 27440401 |
| eCl@ss 8.0 | 27440401 |
| eCl@ss 9.0 | 27440401 |

### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC001121 |
| ETIM 4.0 | EC002643 |
| ETIM 5.0 | EC002643 |
| ETIM 6.0 | EC002643 |
| ETIM 7.0 | EC002643 |

### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211801 |
| UNSPSC 7.0901 | 39121432 |
| UNSPSC 11     | 39121432 |
| UNSPSC 12.01  | 39121432 |
| UNSPSC 13.2   | 39121432 |
| UNSPSC 18.0   | 39121432 |
| UNSPSC 19.0   | 39121432 |
| UNSPSC 20.0   | 39121432 |
| UNSPSC 21.0   | 39121432 |

## Approvals

### Approvals

---

Approvals

EAC / cULus Recognized

---

Ex Approvals

---

# PCB terminal block - FRONT 2,5-H/SA 5/ 9 - 1744109

## Approvals

### Approval details

|     |  |         |
|-----|--|---------|
| EAC |  | B.01742 |
|-----|--|---------|

|                  |  |   |                 |
|------------------|--|---|-----------------|
| cULus Recognized |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | E60425-19860303 |
|------------------|--|---|-----------------|

|                            | B     | C     | D     |
|----------------------------|-------|-------|-------|
| Nominal voltage UN         | 300 V | 300 V | 300 V |
| Nominal current IN         | 20 A  | 17 A  | 10 A  |
| mm <sup>2</sup> /AWG/kcmil | 30-12 | 30-12 | 30-12 |

## Accessories

### Accessories

#### Bridge

Insertion bridge - EBP 2- 5 - 1733169



Insertion bridge - EBP 3- 5 - 1733172



Insertion bridge - EBP 4- 5 - 1733185



## PCB terminal block - FRONT 2,5-H/SA 5/ 9 - 1744109

### Accessories

---

Insertion bridge - EBP 5- 5 - 1733198



Insertion bridge - EBP 6- 5 - 1733208



### Labeled terminal marker

Marker card - SK 5/3,8:FORTL.ZAHLEN - 0804183



Marker card, Card, white, labeled, Horizontal: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... (99)100, mounting type: adhesive, for terminal block width: 5 mm, lettering field size: 5 x 3.8 mm

### Marker pen

Marker pen - B-STIFT - 1051993



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

### Pitch spacer

---

## PCB terminal block - FRONT 2,5-H/SA 5/ 9 - 1744109

### Accessories

Pitch spacer - RZ 2,5-FRONT 2,5 H - 1700079



Pitch spacer, raises the pitch by 2.5 mm, interlocks with terminal block of the same shape, color: green

---

### Screwdriver tools

Screwdriver - SZS 0,6X3,5 - 1205053



Actuation tool, for ST terminal blocks, insulated, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

---

### Terminal marking

Marker card - SK U/3,8 WH:UNBEDRUCKT - 0803906



Marker card, Sheet, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, Office printing systems, mounting type: adhesive, for terminal block width: 210 mm, lettering field size: 186 x 3.8 mm, Number of individual labels: 1440

---

Marker card - SK 5/3,8:UNBEDRUCKT - 0805409



Marker card, Card, white, unlabeled, can be labeled with: Marker pen, mounting type: adhesive, for terminal block width: 5 mm, lettering field size: 5 x 3.8 mm