

Feed-through terminal block - HK 4-FS(8-2,8-0,8) - 2017017

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Feed-through terminal block, Connection type: Screw connection, Slip-on connection, Cross section: 0.2 mm² - 4 mm², AWG :24- 14, Width: 6.2 mm, Color: gray, Mounting: NS 32

The figure shows a version of the article

Product Features

- Terminal blocks and bridge connections eliminated
- User-friendly operation, i.e., unobstructed view of plugs, good access to plugs, and fast connection check
- Attractive appearance due to the elegant conductor conduit in the lateral cable ducts
- Designation read from the front



Key Commercial Data

Packing unit	1 pc
GTIN	 4 017918 052652
Weight per Piece (excluding packing)	11.15 g
Custom tariff number	85369010
Country of origin	Poland

Technical data

General

Number of levels	1
Number of connections	9
Nominal cross section	4 mm ²
Color	gray
Insulating material	PA
Flammability rating according to UL 94	V2

Feed-through terminal block - HK 4-FS(8-2,8-0,8) - 2017017

Technical data

General

Rated surge voltage	8 kV
Degree of pollution	3
Overvoltage category	III
Insulating material group	I
Connection method	Screw connection
Maximum load current	40 A (with 4 mm ² conductor cross section)
Nominal current I _N	32 A
Nominal voltage U _N	800 V
Connection method	Slip-on connection
Open side panel	Yes

Dimensions

Width	6.2 mm
Length	54 mm
Height NS 35/7,5	51.5 mm
Height NS 35/15	59 mm
Height NS 32	56.5 mm
End cover width	2.3 mm

Connection data

Connection method	Screw connection
Screw thread	M3
Tightening torque, min	0.6 Nm
Tightening torque max	0.8 Nm
Stripping length	9 mm
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	12
Conductor cross section flexible min.	0.2 mm ²
Conductor cross section flexible max.	4 mm ²
Min. AWG conductor cross section, flexible	24
Max. AWG conductor cross section, flexible	14
Conductor cross section flexible, with ferrule without plastic sleeve min.	0.25 mm ²
Conductor cross section flexible, with ferrule without plastic sleeve max.	4 mm ²
Conductor cross section flexible, with ferrule with plastic sleeve min.	0.25 mm ²
Conductor cross section flexible, with ferrule with plastic sleeve max.	2.5 mm ²
Cross section with insertion bridge, solid max.	4 mm ²

Feed-through terminal block - HK 4-FS(8-2,8-0,8) - 2017017

Technical data

Connection data

Cross section with insertion bridge, stranded max.	4 mm ²
2 conductors with same cross section, solid min.	0.2 mm ²
2 conductors with same cross section, solid max.	1.5 mm ²
2 conductors with same cross section, stranded min.	0.2 mm ²
2 conductors with same cross section, stranded max.	1.5 mm ²
2 conductors with same cross section, stranded, ferrules without plastic sleeve, min.	0.25 mm ²
2 conductors with same cross section, stranded, ferrules without plastic sleeve, max.	1.5 mm ²
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, min.	0.5 mm ²
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max.	2.5 mm ²
Nominal current I _N	32 A
Maximum load current	40 A (with 4 mm ² conductor cross section)
Nominal voltage U _N	800 V
Internal cylindrical gage	A3
Connection method	Slip-on connection

Standards and Regulations

Connection in acc. with standard	CSA
Flammability rating according to UL 94	V2

Classifications

eCl@ss

eCl@ss 4.0	27141120
eCl@ss 4.1	27141120
eCl@ss 5.0	27141120
eCl@ss 5.1	27141120
eCl@ss 6.0	27141120
eCl@ss 7.0	27141120
eCl@ss 8.0	27141120
eCl@ss 9.0	27141120

ETIM

ETIM 2.0	EC000897
ETIM 3.0	EC000897
ETIM 4.0	EC000897

Feed-through terminal block - HK 4-FS(8-2,8-0,8) - 2017017

Classifications

ETIM

ETIM 5.0	EC000897
----------	----------

UNSPSC

UNSPSC 6.01	30211811
UNSPSC 7.0901	39121410
UNSPSC 11	39121410
UNSPSC 12.01	39121410
UNSPSC 13.2	39121410

Approvals

Approvals

Approvals

CSA / UL Recognized / EAC

Ex Approvals

Approvals submitted

Approval details

CSA	
mm ² /AWG/kcmil	28-14
Nominal current I _N	20 A
Nominal voltage U _N	600 V

UL Recognized	
mm ² /AWG/kcmil	28-12
Nominal current I _N	25 A

Feed-through terminal block - HK 4-FS(8-2,8-0,8) - 2017017

Approvals

Nominal voltage UN	250 V
--------------------	-------


EAC

Drawings

Circuit diagram



Circuit diagram

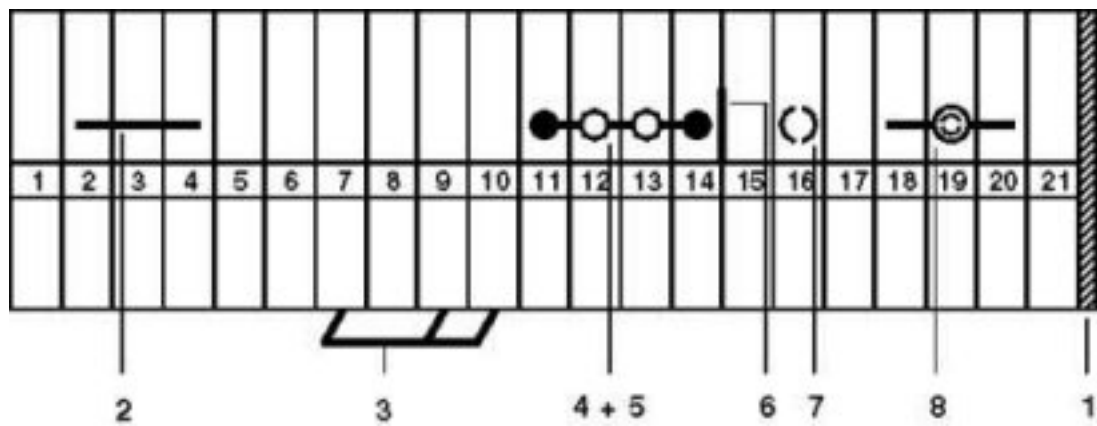

- 1 = cover
- 2 = fixed bridge
- 3 = insertion bridge
- 4 = isolator bridge bar
- 5 = bridge bar isolator
- 6 = separating plate
- 7 = partition plate
- 8 = test plug socket