

Limit value switches - MCR-PSP-DC - 2811925

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



MCR threshold value switch, programmable, with electrically isolated input and 2 relay contacts

The illustration shows version MCR-PSP



Key Commercial Data

Packing unit	1 pc
GTIN	 4 017918 105549
Weight per Piece (excluding packing)	307.0 g
Custom tariff number	85389091
Country of origin	Germany

Technical data

Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

Dimensions

Width	45 mm
Height	75 mm
Depth	110 mm

Ambient conditions

Ambient temperature (operation)	-20 °C ... 65 °C
---------------------------------	------------------

Input data

Description of the input	electrically isolated
--------------------------	-----------------------

Limit value switches - MCR-PSP-DC - 2811925

Technical data

Input data

Configurable/programmable	Yes, programmable
Voltage input signal	-30 V ... 30 V
Current input signal	-30 mA ... 30 mA
Input signal	Resistance thermometer 2, 3 or 4-wire system (in acc. with DIN 43760/DIN IEC 751 or SAMA RC 21-4-1966), e.g. PT sensors, Ni sensors etc.
	Thermocouple sensors (in acc. with DIN IEC 584-1/DIN 43710): B, E, J, K, L, N, R, S, T, U
	Resistance: 0 k Ω ... 8 k Ω (only 2-wire connection)
	Current: - 30 mA...+ 30 mA
	Voltage: - 30 V...+ 30 V
Input resistance of voltage input	200 k Ω
Input resistance current input	50 Ω
Discontinuous control resolution	0,1 °C / 0,01 V / 0,01 mA / 0,1 Ω

Switching output

Contact type	2 x PDT contact, / 2 switching points each, pick-up/drop-out (can be switched)
Contact material	AgNi 0,15 + HTV (hard gold-plated)
Maximum switching voltage	250 V AC
Mechanical service life	2 x 10 ⁷ cycles
Setting range of the response delay	0 s ... 2 s (adjustable)
Status display	LED display
Max. switching current	2 A AC

Power supply

Supply voltage range	20 V DC ... 30 V DC
Max. current consumption	< 60 mA

Connection data

Connection method	Pluggable screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	14
Conductor cross section flexible min.	0.2 mm ²
Conductor cross section flexible max.	2.5 mm ²
Stripping length	8 mm
Screw thread	M3

General

Limit value switches - MCR-PSP-DC - 2811925

Technical data

General

No. of channels	1
Maximum transmission error	0.1 % (of final value)
Maximum temperature coefficient	≤ 0.01 %/K
Measuring rate	2 Hz
Status display	5-position 7-segment display and LEDs
Display resolution	0,1 °C / 0,01 V / 0,01 mA / 0,1 Ω
Protective circuit	Transient protection, polarity protection
Test voltage input/power supply	1 kV AC (50 Hz, 1 min.)
Noise emission	EN 61000-6-4
Noise immunity	EN 61000-6-2:2005
Color	green
Housing material	ABS
Mounting position	any
Conformance	CE-compliant
UL, USA / Canada	cULus

Standards and Regulations

Noise emission	EN 61000-6-4
Noise immunity	EN 61000-6-2:2005
Connection in acc. with standard	CUL
Conformance	CE-compliant
UL, USA / Canada	cULus

Classifications

eCl@ss

eCl@ss 4.0	27200303
eCl@ss 4.1	27200303
eCl@ss 5.0	27200303
eCl@ss 5.1	27200303
eCl@ss 6.0	27200303
eCl@ss 7.0	27210122
eCl@ss 8.0	27210122

ETIM

ETIM 2.0	EC001440
ETIM 3.0	EC001440
ETIM 4.0	EC001440

Limit value switches - MCR-PSP-DC - 2811925

Classifications

ETIM

ETIM 5.0	EC002654
----------	----------

UNSPSC

UNSPSC 6.01	30211506
UNSPSC 7.0901	39121008
UNSPSC 11	39121008
UNSPSC 12.01	39121008
UNSPSC 13.2	39121008

Approvals

Approvals

Approvals


UL Recognized / cUL Recognized / EAC / cULus Recognized

Ex Approvals

Approvals submitted

Approval details

UL Recognized 

cUL Recognized 
--


EAC

cULus Recognized 
--

Limit value switches - MCR-PSP-DC - 2811925

Drawings

Dimensional drawing

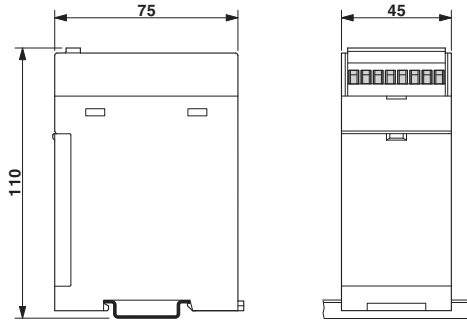

Circuit diagram

