

Cable sleeve - CES-SRC-BK - 0801718

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Small, unslotted cable sleeves suitable for cables with a diameter of 2 ... 11 mm, material: NBR

Product Description

Unslotted sleeves for accommodating cables and lines with a diameter of 2 ... 11 mm, can be used in CES sealing frames

Key Commercial Data

Packing unit	10 STK
GTIN	 4 046356 675185

Technical data

Dimensions

External cable diameter	2 mm ... 11 mm
Length	29.5 mm
Width	19.5 mm
Height	17 mm

Ambient conditions

Degree of protection	IP54 (when using a CES-B..SFFS-PLBK sealing frame with screw locking directly on the housing panel (perpendicular mounting or underwall mounting))
	IP65 (when using a CES-B..SFFS-PLBK sealing frame with screw locking directly on the housing panel (perpendicular mounting or underwall mounting) and a 3.6 mm wide cable binder (e.g., item 3240744))
Ambient temperature (operation)	-40 °C ... 125 °C (static)

General

Product description	Unslotted sleeves for accommodating cables and lines with a diameter of 2 ... 11 mm, can be used in CES sealing frames
No. of conductors	1
Material	NBR
Color	black

Cable sleeve - CES-SRC-BK - 0801718

Classifications

eCl@ss

eCl@ss 4.0	27081002
eCl@ss 4.1	27081002
eCl@ss 5.0	27081002
eCl@ss 5.1	27081002
eCl@ss 6.0	27081002
eCl@ss 7.0	27081002
eCl@ss 8.0	27069216

ETIM

ETIM 3.0	EC000879
ETIM 4.0	EC000451
ETIM 5.0	EC000451

UNSPSC

UNSPSC 6.01	30212109
UNSPSC 7.0901	39121708
UNSPSC 11	39121708
UNSPSC 12.01	39121708
UNSPSC 13.2	39121708

Approvals

Approvals

Approvals

GL

Ex Approvals

Approvals submitted


Approval details

GL

Drawings

Cable sleeve - CES-SRC-BK - 0801718

Dimensional drawing

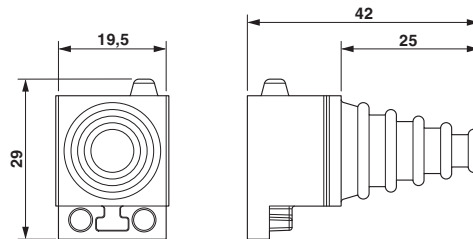

Dimensional drawing

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>