

# G-INESR-M25-M68N-NEPDS-S - Cable gland



1415193

<https://www.phoenixcontact.com/nl/products/1415193>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Cable gland, material for screw connection: Brass, nickel-plated, application: Standard, external cable diameter 9 mm ... 17 mm, shielding: no, connecting thread: M25 x 1.5, color: silver-colored, with external strain relief, with O-ring

## Your advantages

- Weatherproof sealing material
- Halogen-free

## Commercial data

|                                      |               |
|--------------------------------------|---------------|
| Item number                          | 1415193       |
| Packing unit                         | 5 pc          |
| Minimum order quantity               | 5 pc          |
| Sales key                            | AF7DEX        |
| Product key                          | AF7DEX        |
| GTIN                                 | 4055626038216 |
| Weight per piece (including packing) | 120,22 g      |
| Weight per piece (excluding packing) | 115,45 g      |
| Customs tariff number                | 74198090      |
| Country of origin                    | DE            |

# G-INESR-M25-M68N-NEPDS-S - Cable gland



1415193

<https://www.phoenixcontact.com/nl/products/1415193>

## Technical data


### Product properties

|                                |           |
|--------------------------------|-----------|
| Application                    | Standard  |
| No. of conductors              | 1         |
| Manufacturer                   | WISKA     |
| Manufacturer Designation       | EMSKVZ 25 |
| Shielded                       | no        |
| Execution of the strain relief | B         |

### Characteristics

|                          |   |
|--------------------------|---|
| Category of shock impact | 6 |
| Design, Strain relief    | B |

### Dimensions

|                                          |                                                                                      |
|------------------------------------------|--------------------------------------------------------------------------------------|
| Dimensional drawing                      |  |
| Length                                   | 42 mm                                                                                |
| Length of the connecting thread          | 7 mm                                                                                 |
| Length without connecting thread         | 35 mm                                                                                |
| Hole diameter                            | 25.1 mm ... 25.2 mm                                                                  |
| Wrench size, union nut                   | 29 mm                                                                                |
| Wrench size, support                     | 29 mm                                                                                |
| Clamping range of the strain relief clip | 9.00 mm ... 17.00 mm                                                                 |
| Hexagon angular dimension                | 32 mm                                                                                |
| Thread type connection side              | M25 x 1.5                                                                            |
| Thread pitch                             | 1.5 mm                                                                               |

### Connection data

|                   |                             |
|-------------------|-----------------------------|
| Tightening torque | 10 Nm (Union nut: EN 62444) |
|                   | 10 Nm (Support: EN 62444)   |
|                   | 0.4 Nm (Screw for clip)     |

### Material specifications

|                               |                      |
|-------------------------------|----------------------|
| Color                         | brass color          |
| Material Compression ring     | PA                   |
| Seal material O-ring          | EPDM                 |
| Seal material Cable seal      | EPDM                 |
| Material for screw connection | Brass, nickel-plated |

### Cable/line

# G-INESR-M25-M68N-NEPDS-S - Cable gland



1415193

<https://www.phoenixcontact.com/nl/products/1415193>

|                                 |                                   |
|---------------------------------|-----------------------------------|
| External cable diameter Cable 1 | 9 mm ... 17 mm                    |
| External cable diameter         | 7.5 mm ... 11.3 mm (for UL 514 B) |
| Halogen-free                    | yes                               |

## Environmental and real-life conditions

### Ambient conditions

|                                 |                                 |
|---------------------------------|---------------------------------|
| Degree of protection            | IP68 (5 bar / 0.5 h)            |
|                                 | IP69 (DIN EN 60529 / IEC 60529) |
| Ambient temperature (operation) | -40 °C ... 100 °C (static)      |


# G-INESR-M25-M68N-NEPDS-S - Cable gland

1415193

<https://www.phoenixcontact.com/nl/products/1415193>



## Drawings

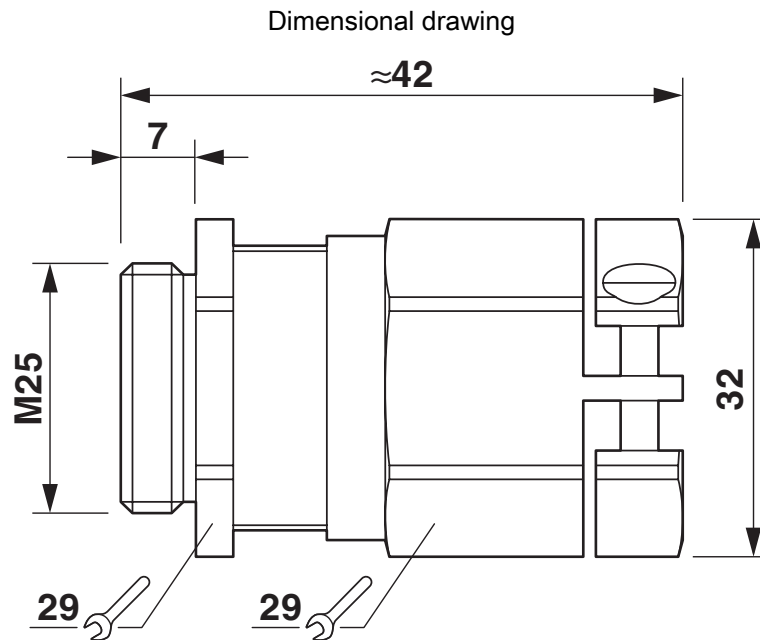

# G-INESR-M25-M68N-NEPDS-S - Cable gland



1415193

<https://www.phoenixcontact.com/nl/products/1415193>

## Approvals

📄 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/nl/products/1415193>



**cUL Recognized**  
Approval ID: E179850



**UL Recognized**  
Approval ID: E179850



**GOST-R**  
Approval ID: POCC DE.A\*98.H12052

# G-INESR-M25-M68N-NEPDS-S - Cable gland



1415193

<https://www.phoenixcontact.com/nl/products/1415193>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-13.0 | 27140801 |
| ECLASS-15.0 | 27140801 |

### ETIM

|           |          |
|-----------|----------|
| ETIM 10.0 | EC000441 |
|-----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121300 |
|-------------|----------|

## Environmental product compliance

## EU RoHS

|                                         |      |
|-----------------------------------------|------|
| Fulfills EU RoHS substance requirements | Yes  |
| Exemption                               | 6(c) |

## China RoHS

|                                        |                                                                                                                                                                                                                                   |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Environment friendly use period (EFUP) | EFUP-50                                                                                                                                                                                                                           |
|                                        | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

## EU REACH SVHC

|                                     |                                      |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1)                 |
| SCIP                                | ae423f35-29fd-48a8-a700-e09c4da940bf |