

TWO CONDUCTOR CABLE, FLAT BRAID SHIELDED,
JACKETED, OUTER SPACE, 600 VOLT


SPECIFICATION SHEET

44/9075

DATE 6-21-77

REVISION

This specification sheet forms a part of the latest issue of Raychem Specification 44.

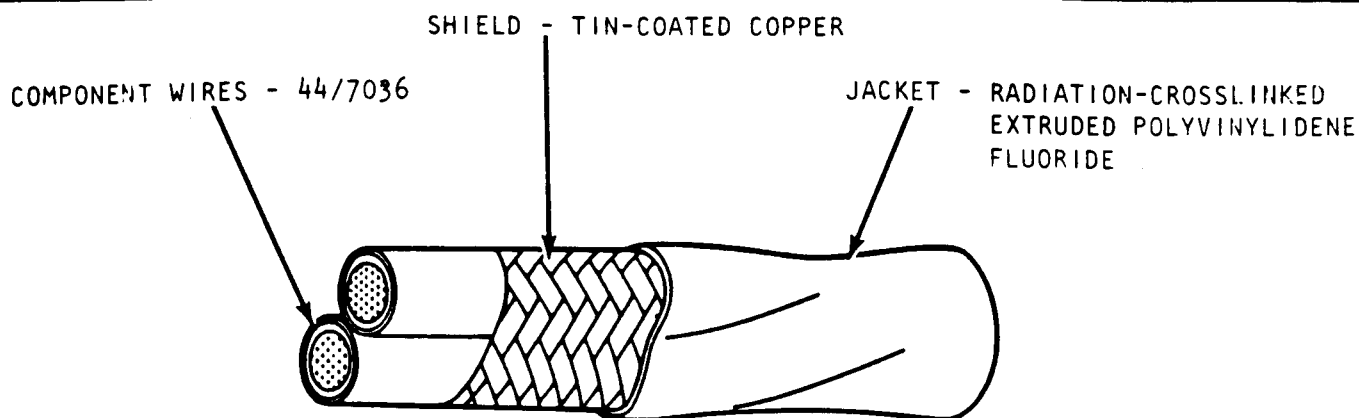

CABLE CONSTRUCTION DETAILS

PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (in.)		OUTSIDE DIAMETER (in.)		MAXIMUM WEIGHT (lb/1000 ft)
			MINIMUM	NOMINAL	NOMINAL	MAXIMUM	
44/9075-26-*	26	.0015 x .013	.0065	.0080	.089	.095	6.0

ADDITIONAL REQUIREMENTS

VACUUM STABILITY:

Total Mass Loss (TML), 1.0% (maximum)

Volatile Condensable Material (VCM), 0.1% (maximum)

Except as specified above this construction shall meet all requirements of Raychem Specification Sheet 44/242.

The "*" in the part number above shall be replaced by color code designators in accordance with MIL-STD-681 with a slash separating component wire colors and a dash separating the component wire colors from the jacket color.

Example: AWG 26; white and black component wires; white jacket:

44/9075-26-9/0-9.

DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL.

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

Raychem

Raychem Corporation
300 Constitution Drive, Menlo Park, California 94025
415) 329 3333 TWX 910 373 1205