


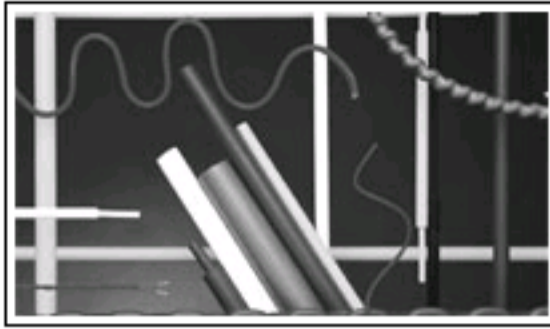

CGPT-12/4-4-SP Product Details

[Share](#) | [Print](#) | [Email](#)


CGPT-12/4-4-SP

TE Internal Number: 7222754001
✔ Active

Heat Shrink Tubing

✔ Always EU RoHS/ELV Compliant (Statement of Compliance)

Product Highlights:

- Heat Shrinkable Tubing
- Product Name = CGPT
- Product Source = U.K.
- Flexible
- Thin Wall Style

[View all Features](#)

Quick Links

- ▶ [Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

[Add to My Part List](#) | [Request Sample](#) | [Find Similar Products](#) | [Buy Product](#)

Documentation & Additional Information

Product Drawings:

- None Available

Catalog Pages/Data Sheets:

- None Available

Product Specifications:

- None Available

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files:

- None Available

Related Products:

- [Tooling](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- Product Type = Heat Shrinkable Tubing
- Color = Yellow

Dimensions:

- Expanded ID, Min. (mm [in]) = 12.00 [0.472]
- Recovered ID, Max. (mm [in]) = 4.00 [0.157]

Body Features:

- Product Name = CGPT
- Pliancy = Flexible
- Wall Style = Thin
- Wall Type = Single
- Material = Crosslinked Polyolefin
- Shrink Ratio = 3:1
- Fluid Type = Brake Fluid, Chemicals/Solvents, Water
- Resistant To = Fluids, Mechanical Damage, Strain
- Wall Thickness - Full Recovery (Nominal) (mm [in]) = 0.75 [0.0295]

Housing Features:

- Material Systems = No

Industry Standards:

- Government/Industry Qualification = No
- Flammability Rating Type = Flame-Retardant
- UL Rating = Recognized
- CSA Certified = Yes
- Approved Standards = CSA LR31929, UL E35586
- RoHS/ELV Compliance = RoHS compliant, ELV compliant
- Lead Free Solder Processes = Not relevant for lead free process
- RoHS/ELV Compliance History = Always was RoHS compliant

Environmental:

- Fluid Resistance = Splash Protection
- Operating Temperature (°C) = -40 - +135

Conditions for Usage:

- Full Recovery Temperature (°C) = 120
- Shrink Temperature, Min. (°C) = 80
- High Temperature Compatible = No

Operation/Application:

- Application = Cable Bundling, Cable Jacketing, Color Coding, Identification, Insulation and Protection
- Emission Free = No
- Product Use = Cables, Electronic Components, Pipes, Wires

Packaging Features:

- Packaging Method = Spool

Product Availability:

- Product Source = U.K.

Other:

- Brand = Raychem

Corporate Information

- [About TE](#)
- [Investors](#)
- [News Room](#)
- [Supplier Portal](#)
- [Careers](#)
- [Terms & Conditions](#)
- [Privacy Policy](#)

Quick Links

- [Distributor Inventory](#)
- [Product Cross Reference](#)
- [Documents & Drawings](#)
- [Product Compliance Support Center](#)
- [Site Map](#)

Customer Support

- [Email or Chat With Us](#)
- [Find a Phone Number](#)
- [Knowledge Base](#)
- [Manage Your Account](#)

Keep Me Informed

Receive TE News, Events & Technology Updates

[▶](#)

