




HARNESSING

HEAT SHRINK BOOTS

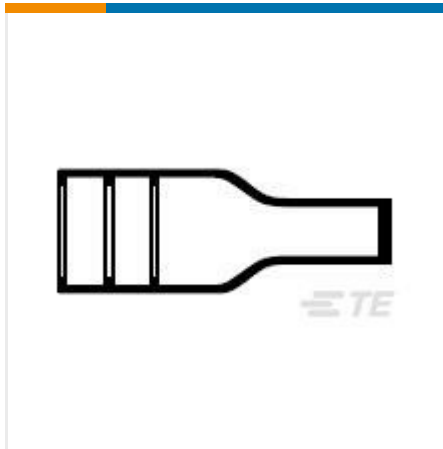

✓ Active

TE CONNECTIVITY (TE)

202D163-12-60-0

Raychem | CAP , CRPS

202D163-12-60-0

TE Internal Number: 811485-000

Alias ID: 8-1196310-3

EU RoHS Compliant

EU ELV Compliant

Lipped Yes

Operating Temperature Range (°C) -55 – 200

Fluid/Chemical Resistance Suitable for long term fluid immersion & elevated temperatures including fuel

Adhesive Options S1125 Separate Adhesive, -75°C – 150°C (-103°F – 302°F), S1255-04 Separate Adhesive, -55°C – 200°C (-67°F – 392°F)

Material Systems Code 200

↓ **PRODUCT DRAWING**
English

DOCUMENTATION

Product Drawings

Boot, Straight, With Lips

PDF

English

Product Specifications

Product Specification

Raychem Fluoro Elastomer Molded Components Flame-Retarded, Flexible, Heat-Shrinkable

PDF

English

Product Environmental Compliance

Safety Data Sheet

Heat-Shrinkable Fluoropolymer Products

PDF

German

Heat-Shrinkable Fluoropolymer Products

PDF

French

Heat-Shrinkable Fluoropolymer Products

PDF

Dutch

Heat-Shrinkable Fluoropolymer Products

PDF

Italian

Heat-Shrinkable Fluoropolymer Products

PDF

Spanish

Heat-Shrinkable Fluoropolymer Products

PDF

Swedish

Heat-Shrinkable Fluoropolymer Products

PDF

English

FEATURES



Please review product documents or [contact us](#) for the latest agency approval information.

Please Note: Use the Product Drawing for all design activity.

Product Type Features

Molded Part Type Molded Boot

Configuration Features

Lipped Yes

Body Features

Material Systems Code 200

Adhesive Pre-Coat No

Entry Size (Braided or Magneform Adapter) 15, 16, 18, 20

Entry Size (Solid or Fixed Adapter) 10 – 12

Material Modified Fluoro-Elastomer

Entry Size (Tinel-Lock Adapter) 14, 16, 18

Entry Size (Spin Coupling Adapter) 16 – 18

Dimensions

Cable Diameter Range 9.9 – 22.1 mm [.39 – .87 in]

Wire/Cable Outside Diameter .43 in, .433 in, .47 in, .55 in, .63 in, 11 mm, 12 mm, 14 mm, 16 mm

Usage Conditions

Operating Temperature Range (°C) -55 – 200

Operation/Application

Power Cable Accessory No

Industry Standards

Government Qualified No

Approved Standards BS-G-198-5-DD, DEF Std 59-97 Issue 3 Type DD, SAE AS I 81765/4

Other

Fluid/Chemical Resistance Suitable for long term fluid immersion & elevated temperatures including fuel

Adhesive Options S1125 Separate Adhesive, -75°C – 150°C (-103°F – 302°F), S1255-04 Separate Adhesive, -55°C – 200°C (-67°F – 392°F)

Adhesive Type Adhesive Purchased Separately

Statement of Compliance

Statement of Compliance

PDF