

Data sheet

E-DAT modul 24x8(8) 1RU patch panel Cat.6 stainless steel


Page 1/7

P/N
130921-E


EAN 4250184106166

2015-08-07

Illustrations

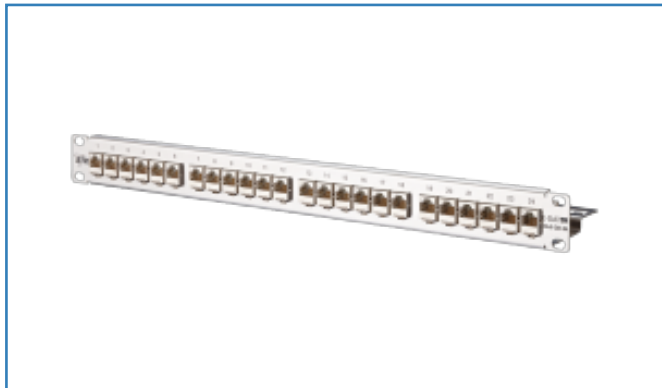

Dimensional drawing

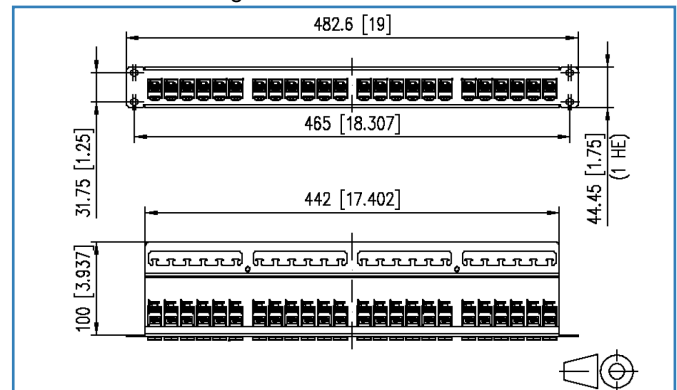

See enlarged drawings at the end of document

Product specification

- 19 inch 1RU stainless steel module frame with 24 individual "E-DAT modul" modules
- component testing for Cat.6_A to ISO/IEC 11801 Ed.2.2:2011-06, DIN EN 50173-1:2011-09, TIA/EIA-568-C.2 (2009-08) and IEC 60603-7-51 Ed.1 (12/2008), certified to GHMT
- compliance with class E_A to ISO/IEC 11801 Ed.2.2:2011-06, DIN EN 50173-1:2011-09
- tested: Link to 500 MHz
- for 10 GBit Ethernet (IEEE 802.3an)
- suitable for Power over Ethernet (PoE, PoE plus and UPoE)
- easy to install connection of 2 to 4-pair data lines AWG 26/1 - 22/1 and stranded wires with 7 copper conductors AWG 26/7 - 22/7 to BTR 8-fold insulation displacement connectors (IDC)
- marking of conductor assignment to T568A or T568B
- integrated cable support with optional strain relief
- grounding bolt M6 x 10 with nut and lock washer
- incl. 30 cm grounding cable
- all fully shielded modules connected by means of grounding rail

Data sheet

Page 2/7

E-DAT modul 24x8(8) 1RU patch panel Cat.6 stainless steel

P/N

130921-E

EAN 4250184106166

2015-08-07

Technical Data

General Data

Fields of application

Office

Design

patch panel

Mounting style

1RU

Shielding

shielded

Transmission technology

Copper

Wiring

T568A

Color

stainless steel

Dimensions

Dimension (L x W x H)

100.00 x 442.00 x 44.45 mm

Dimension (L x W x H)

3.94 x 17.40 x 1.75 in.

Inches

19 inches

Height unit

1RU

Modularity

yes

Labeling option

printed numbers

Transmission characteristics

Category (ISO)

6

Class (ISO/IEC)

E_A

Category (TIA)

6

PoE

IEEE 802.3af

PoE plus

IEEE 802.3at

UPoE

yes

Transmission rate up to 10 GBit

IEEE 802.3an

Connections/interfaces

Connector technology interface 1

IDC-connection

Connector technology interface 2

RJ45-jack

Number of ports interface 2

24

Number of ports interface 2 equipped

24

Number of positions/contacts interface 1

24 x 8

Number of positions/contacts interface 2

24 x 8P/8C



Technical Data

Connections/interfaces

Termination data, solid wire (min. - max.)

Conductor cross section, solid wire	AWG 26 - 22
Conductor cross section, solid wire	0.128 - 0.324 mm ²
Conductor diameter, solid wire (bare copper)	0.409 - 0.643 mm
Conductor diameter, solid wire (bare copper)	0.016 - 0.025 in.

Termination data, stranded wire (min. - max.)

Conductor cross section, stranded wire	AWG 26 - 22
Conductor cross section, stranded wire	0.141 - 0.355 mm ²
Conductor diameter, stranded wire (bare copper)	0.483 - 0.762 mm
Conductor diameter, stranded wire (bare copper)	0.019 - 0.030 in.

Cable access/outlet	180°
Grounding wire length	0.30 m
Grounding wire length	0.98 ft
Ground connection	grounding bolt M6x10 with nut and lock washer
Shield connection	flexible contact spring

Electrical characteristics

Current carrying capacity	max. 1 A
Rated voltage	max. 50 V
Contact resistance	max. 20 mOhm
Through resistance	max. 200 mOhm
Insulation resistance	min. 500 MOhm
Dielectric strength conductor-conductor (secondary)	max. 1000 V DC

Mechanical characteristics

Insertion and withdrawal force	max. 20 N
Life - Number of mating cycles	min. 750
Position/mounting of latch - standard installation position	top

Technical Data

Materials and material properties

Material - Jack contact	CuSn (tin bronze)
Material - Jack contact finish	Ni + Au (nickel-gold)
Material - Jack shield	GD-Zn (zinc die-cast)
Material - Module support	stainless steel

Environmental conditions

Temperature (min. - max.)	
Temperature - Storage °C	-40 - 70 °C
Temperature - Storage °F	-40 - 158 °F
Temperature - Operating °C	-40 - 70 °C
Temperature - Operating °F	-40 - 158 °F
Electromagnetic measurement	E ₂

Certifications

GHMT PVP	yes
----------	-----

Approvals

CE	compliant
RoHS	compliant
UL listed (file no.)	E178484

The product meets the following standards

Generic cabling systems	
General requirements	ISO/IEC 11801 Ed.2.2: 2011-06 DIN EN 50173-1: 2011-09 TIA/EIA 568-C.2 (2009-08)
Connectors for electronic equipment	
Free and fixed connectors	DIN EN 60603-7-51:2011-01
Interference proof	
Immunity for industrial environments	DIN EN 61000-6-2:2006-03

Data sheet

Page 5/7

E-DAT modul 24x8(8) 1RU patch panel Cat.6 stainless steel

P/N

130921-E

EAN 4250184106166

2015-08-07

Technical Data**Classifications**

ETIM 5.0 EC001128

Packing details

Type of packaging	1 pc(s) / box
Packaging unit - Weight (gram)	1800.00 g
Packaging unit - Weight (pound)	3.97 lb
Packaging dimension (W x H x D)	520.00 x 180.00 x 46.00 mm
Packaging dimension (W x H x D)	20.47 x 7.09 x 1.81 in.



Data sheet

Page 6/7

E-DAT modul 24x8(8) 1RU patch panel Cat.6 stainless steel

P/N

130921-E

EAN 4250184106166

2015-08-07

Accessories

P/N	Designation
130792	Mounting kit, cage nuts M6



Illustrations

Dimensional drawing

