



AST | AST4400

TE Internal #: 11191926-00

Industrial Pressure Transducer, Gauge, 4 – 20 mA Output Signal, 2X, Min Proof Pressure Range, AST4400

[View on TE.com >](#)

Sensors > Pressure Sensors > Pressure Transducers > Intrinsically Safe Pressure Transducer



Pressure Sensor Type: **Industrial Pressure Transducer**

Pressure Type: **Gauge**

Hazardous Area Approval: **Intrinsically Safe**

Output Signal Type: **4 – 20 mA**

Pressure: **3.44 bar [ 50 psi ]**

[All Intrinsically Safe Pressure Transducer \(49\)](#)

## Features

### Product Type Features

|                      |                                |
|----------------------|--------------------------------|
| Pressure Sensor Type | Industrial Pressure Transducer |
| Pressure Type        | Gauge                          |

### Configuration Features

|                       |              |
|-----------------------|--------------|
| Electrical Connection | Conduit 2 ft |
|-----------------------|--------------|

### Electrical Characteristics

|                      |           |
|----------------------|-----------|
| Supply Voltage Range | 10 – 28 V |
|----------------------|-----------|

### Body Features

|               |        |
|---------------|--------|
| Port Material | 17-4PH |
|---------------|--------|

### Dimensions

|                  |                    |
|------------------|--------------------|
| Product Diameter | 22.22 mm[.875 in]  |
| Product Length   | 664.9 mm[26.18 in] |

### Usage Conditions

|                             |                           |
|-----------------------------|---------------------------|
| Pressure                    | 3.44 bar[50 psi]          |
| Operating Temperature Range | -40 – 80 °C[-40 – 176 °F] |

### Operation/Application

|                    |           |
|--------------------|-----------|
| Output Signal Type | 4 – 20 mA |
|--------------------|-----------|



|                      |            |
|----------------------|------------|
| Proof Pressure Range | 2X, Min    |
| Pressure Accuracy    | ±0.25% FSO |

**Industry Standards**

|   |                    |
|---|--------------------|
| Compatible With Agency/Standards Products | UL                 |
| Hazardous Area Approval                   | Intrinsically Safe |

**Other**

|                |           |
|----------------|-----------|
| Sensor Options | No Option |
| Port Fitting   | 1/4 MNPT  |

**Product Compliance**

[For compliance documentation, visit the product page on TE.com>](#)

|   |  |
|---|--|
| EU RoHS Directive 2011/65/EU                  | Compliant with Exemptions  |
| EU ELV Directive 2000/53/EC                   | Not Yet Reviewed   |
| China RoHS 2 Directive MIIT Order No 32, 2016 | 有害物质含量超出标准 Restricted Substance(s) Above Threshold               |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2025 (250)<br>Not Yet Reviewed |
| Halogen Content                               | Not Yet Reviewed for halogen content                             |
| Solder Process Capability                     | Not reviewed for solder process capability                       |


**Product Compliance Disclaimer**

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE’s information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) ‘Guidance on requirements for substances in articles’ (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of ‘complex object’, the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA “Guidance on requirements for substances in articles” (June 2017, version 4.0) and will be updating its statements accordingly.

**Compatible Parts**



## Also in the Series | **AST4400**

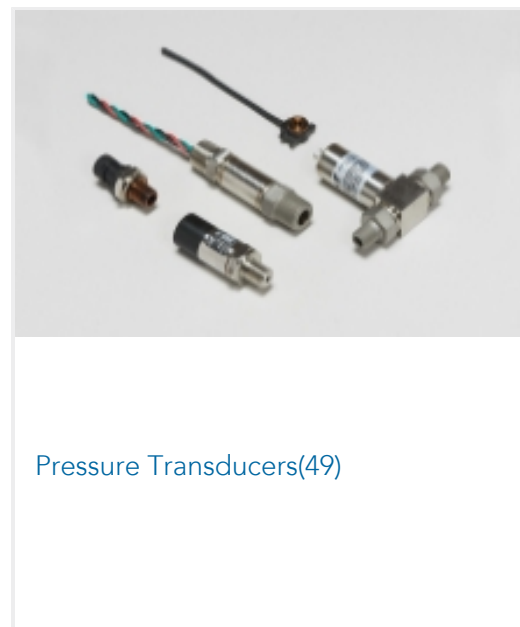

## Customers Also Bought



## Documents

### CAD Files

#### 3D PDF

3D

#### Customer View Model

[ENG\\_CVM\\_CVM\\_11191926-00\\_A.2d\\_dxf.zip](#)

English

#### Customer View Model

[ENG\\_CVM\\_CVM\\_11191926-00\\_A.3d\\_igs.zip](#)

English

#### Customer View Model

[ENG\\_CVM\\_CVM\\_11191926-00\\_A.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

## Datasheets & Catalog Pages

AST4400A00050P4L0000

Industrial Pressure Transducer, Gauge, 4 – 20 mA Output Signal, 2X, Min Proof  
Pressure Range, AST4400



[AST4400 Datasheet](#)

English