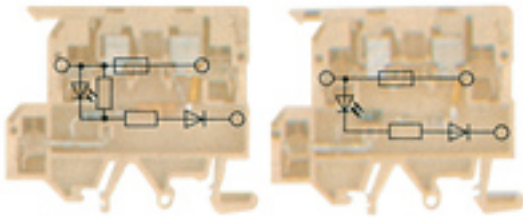


**SAK Series**  
**KDKS1/EN LD 230VAC****Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com**Product image****Klippon® Connect with clamping yoke Technology**

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

**General ordering data**

Type	KDKS1/EN LD 230VAC
Order No.	<a href="#">8148910000</a>
Version	SAK Series, Fuse terminal, Rated cross-section: 4 mm <sup>2</sup> , Screw connection, Direct mounting
GTIN (EAN)	4008 190096076
Qty.	25 pc(s).

Creation date April 13, 2020 6:37:26 PM CEST

Catalogue status 03.04.2020 / We reserve the right to make technical changes.

**SAK Series**  
**KDKS1/EN LD 230VAC**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data****Dimensions and weights**

Width	8 mm	Width (inches)	0.315 inch
Height	62.75 mm	Height (inches)	2.47 inch
Depth	55.5 mm	Depth (inches)	2.185 inch
Net weight	17.186 g		

**Temperatures**

Storage temperature, max.	40 °C	Storage temperature, min.	10 °C
Storage temperature	10 °C...40 °C	Continuous operating temp., min.	-50 °C
Continuous operating temp., max.	100 °C		

**Material data**

Material	PA 66	Colour	beige / yellow
UL 94 flammability rating	V-2		

**System specifications**

Version	Screw connection, Fuse cartridge, with LED, One end without connector	End cover plate required	Yes
Number of potentials	1	Number of levels	2
Number of clamping points per level	2	Number of potentials per tier	1
Levels cross-connected internally	No	PE connection	No
Rail	TS 35, TS 32	N-function	No
PE function	No	PEN function	No

**Additional technical data**

Installation advice	Direct mounting	Number of similar terminals	1
Open sides	right	Type of mounting	Snap-on

**Conductors for clamping (rated connection)**

Blade size	0.6 x 3.5 mm	Clamping range, max.	4 mm <sup>2</sup>
Clamping range, min.	0.5 mm <sup>2</sup>	Clamping screw	M 3
Connection direction	on side	Gauge to IEC 60947-1	A3
Number of connections	3	Stripping length	9 mm
Tightening torque, max.	0.8 Nm	Tightening torque, min.	0.5 Nm
Twin wire-end ferrules, max.	1.5 mm <sup>2</sup>	Twin wire-end ferrules, min.	0.5 mm <sup>2</sup>
Type of connection	Screw connection	Wire connection cross section AWG, max.	AWG 12
Wire connection cross section, finely stranded, max.	4 mm <sup>2</sup>	Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max.	4 mm <sup>2</sup>
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min.	0.5 mm <sup>2</sup>	Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max.	4 mm <sup>2</sup>
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min.	0.5 mm <sup>2</sup>	Wire connection cross-section, finely stranded, min.	0.5 mm <sup>2</sup>
Wire connection cross-section, solid core, max.	4 mm <sup>2</sup>	Wire connection cross-section, solid core, min.	0.5 mm <sup>2</sup>

## Data sheet

### SAK Series KDKS1/EN LD 230VAC

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

## Technical data

### Dimensions

TS 32 offset	31 mm	TS 35 offset	31 mm
--------------	-------	--------------	-------

### Display element

Current	2 mA	Operating voltage for display, max.	230 V
Operating voltage for display, min.	230 V	Type of voltage for indicator	AC

### Fuse terminals

Cartridge fuse	G-Si. 5 x 20	Current	2 mA
Display	LED	Fuse holder (cartridge holder)	Pivoting
Operating voltage, max.	230 V	Type of voltage for indicator	AC

### Rating data

Rated cross-section	4 mm <sup>2</sup>	Rated voltage	500 V
Rated current	6.3 A	Current at maximum wires	6.3 A
Volume resistance according to IEC 60947-7-x	1 mΩ	Power loss in accordance with IEC 60947-7-x	1.02 W
Pollution severity	3		

### Classifications

ETIM 6.0	EC000899	ETIM 7.0	EC000899
eClass 9.0	27-14-11-16	eClass 9.1	27-14-11-16
eClass 10.0	27-14-11-16	UNSPSC	30-21-18-11

### Approvals

Approvals



ROHS Conform

### Downloads

Approval/Certificate/Document of Conformity	<a href="#">DE_PT1363_20160418_202_ISSUE01.pdf</a>
Engineering Data	<a href="#">EPLAN_WSCAD</a>
Engineering Data	<a href="#">STEP</a>
User Documentation	<a href="#">StorageConditionsTerminalBlocks</a>

### Safety note

Safety notice [Safety Information](#)