

**H2,5/24 XS BL****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 16


D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-2083

www.weidmueller.com

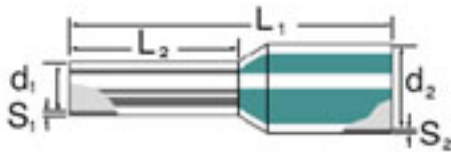

- supplied loose in polybag
- Weidmüller colour code

**General ordering data**

|            |   |
|------------|---|
| Order No.  | <a href="#">9202880000</a>  |
| Type       | H2,5/24 XS BL   |
| Version    | Wire end ferrule, 2.5 mm <sup>2</sup> , 14.5 mm. Colour code: Weidmüller, Black |
| GTIN (EAN) | 4032248517954   |
| Qty.       | 100 pc(s).  |

**H2,5/24 XS BL**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-2083  
 www.weidmueller.com

**Technical data**

**Dimensions**

|        |       |            |        |
|--------|-------|------------|--------|
| Length | 24 mm | Net weight | 0.34 g |
|--------|-------|------------|--------|

**Product data**

|                               |                     |                               |         |
|-------------------------------|---------------------|-------------------------------|---------|
| Conductor cross-section       | 2.5 mm <sup>2</sup> | Contact surface length (L2)   | 14.5 mm |
| Contact surface diameter (D1) | 2.3 mm              | Collar diameter (D2)          | 7.6 mm  |
| Metal sleeve thickness (S1)   | 0.15 mm             | Plastic collar thickness (S2) | 0.3 mm  |

**Classifications**

|            |             |            |             |
|------------|-------------|------------|-------------|
| ETIM 2.0   | EC000005    | ETIM 3.0   | EC000005    |
| UNSPSC     | 31-16-31-02 | eClass 4.1 | 27-06-07-01 |
| eClass 5.1 | 27-40-02-01 | eClass 6.0 | 27-40-02-01 |
| eClass 7.0 | 27-40-02-01 |            |             |

**Product information**

|                        |  |
|------------------------|--|
| Description of article | Wire end ferrule for short-circuit-proof and earth-fault-proof lines, blue |
|------------------------|--|

**Approvals**

Approvals

