

# DATA SHEET

## THICK FILM CHIP RESISTORS AUTOMOTIVE GRADE

AC series

$\pm 5\%$ ,  $\pm 1\%$ ,  $\pm 0.5\%$ ,  $\pm 0.1\%$  (Low TCR)

Sizes 0201/0402/0603/0805/1206/  
1210/1218/2010/2512

RoHS compliant & Halogen free



## SCOPE

This specification describes AC0201 to AC2512 chip resistors with lead-free terminations made by thick film process.

## APPLICATIONS

- All general purpose applications
- Car electronics, industrial application

## FEATURES

- AEC-Q200 qualified
- Moisture sensitivity level: MSL 1
- AC series soldering is compliant with J-STD-020D
- Halogen free epoxy
- RoHS compliant
  - Products with lead-free terminations meet RoHS requirements
  - Pb-glass contained in electrodes, resistor element and glass are exempted by RoHS
- Reduce environmentally hazardous waste
- High component and equipment reliability
- The resistors are 100% performed by automatic optical inspection prior to taping.

## ORDERING INFORMATION - GLOBAL PART NUMBER

Part number is identified by the series name, size, tolerance, packaging type, temperature coefficient, taping reel and resistance value.

### GLOBAL PART NUMBER

AC XXXX X X X XX XXXX L  
(1) (2) (3) (4) (5) (6) (7)

#### (1) SIZE

0201 / 0402 / 0603 / 0805 / 1206 / 1210 / 1218 / 2010 / 2512

#### (2) TOLERANCE

B =  $\pm 0.1\%$  for low TCR      F =  $\pm 1\%$   
D =  $\pm 0.5\%$       J =  $\pm 5\%$  (for Jumper ordering, use code of J)

#### (3) PACKAGING TYPE

R = Paper taping reel      K = Embossed taping reel

#### (4) TEMPERATURE COEFFICIENT OF RESISTANCE

— = Base on spec      E =  $\pm 50$  ppm/ $^{\circ}\text{C}$

#### (5) TAPING REEL

07 = 7 inch dia. Reel & Standard power      7W = 7 inch dia. Reel & 2 x standard power  
13 = 13 inch dia. Reel      3W = 13 inch dia. Reel & 2 x standard power

#### (6) RESISTANCE VALUE

1  $\Omega$  to 22 M $\Omega$   
There are 2~4 digits indicated the resistance value. Letter R/K/M is decimal point, no need to mention the last zero after R/K/M, e.g. 1K2, not 1K20.  
Detailed coding rules of resistance are shown in the table of "Resistance rule of global part number".

#### (7) DEFAULT CODE

Letter B is for bulk AOI ordering only. (Note)

| Resistance rule                 | Resistance coding rule | Example                                                       |
|---------------------------------|------------------------|---------------------------------------------------------------|
| XXXX<br>(1 to 9.76 $\Omega$ )   |                        | 1R = 1 $\Omega$<br>1R5 = 1.5 $\Omega$<br>9R76 = 9.76 $\Omega$ |
| XXRX<br>(10 to 97.6 $\Omega$ )  |                        | 10R = 10 $\Omega$<br>97R6 = 97.6 $\Omega$                     |
| XXXR<br>(100 to 976 $\Omega$ )  |                        | 100R = 100 $\Omega$<br>976R = 976 $\Omega$                    |
| XKXX<br>(1 to 9.76 K $\Omega$ ) |                        | 1K = 1,000 $\Omega$<br>9K76 = 9760 $\Omega$                   |
| XMXX<br>(1 to 9.76 M $\Omega$ ) |                        | 1M = 1,000,000 $\Omega$<br>9M76 = 9,760,000 $\Omega$          |
| XXMX<br>(10 M $\Omega$ )        |                        | 10M = 10,000,000 $\Omega$                                     |

### ORDERING EXAMPLE


The ordering code for an AC0402 chip resistor, value 100 K $\Omega$  with  $\pm 1\%$  tolerance, supplied in 7-inch tape reel is: AC0402FR-07100KL.

### NOTE

1. All our R-Chip products are RoHS compliant and Halogen free. "LFP" of the internal 2D reel label states "Lead-Free Process".
2. On customized label, "LFP" or specific symbol can be printed.
3. AC series with  $\pm 0.5\%$  tolerance is also available. For further information, please contact sales.

**MARKING****AC0201 / AC0402**

No marking

**AC0603 / AC0805 / AC1206 / AC1210 / AC2010 / AC2512**

Value=10 KΩ

E-24 series: 3 digits,  $\pm 5\%$ 

First two digits for significant figure and 3rd digit for number of zeros

**AC0603**

Value = 24 Ω

E-24 series: 3 digits,  $\pm 1\%$  &  $\pm 0.5\%$ 


One short bar under marking letter



Value = 12.4 KΩ

E-96 series: 3 digits,  $\pm 1\%$  &  $\pm 0.5\%$ 


First two digits for E-96 marking rule and 3rd letter for number of zeros

**AC0805 / AC1206 / AC1210 / AC2010 / AC2512**

Value = 10 KΩ

Both E-24 and E-96 series: 4 digits,  $\pm 1\%$  &  $\pm 0.5\%$ 


First three digits for significant figure and 4th digit for number of zeros

**AC1218**

Value = 10 KΩ

E-24 series: 3 digits,  $\pm 5\%$ 

First two digits for significant figure and 3rd digit for number of zeros



Value = 10 KΩ

Both E-24 and E-96 series: 4 digits,  $\pm 1\%$  &  $\pm 0.5\%$ 

First three digits for significant figure and 4th digit for number of zeros

**NOTE**



For further marking information, please refer to data sheet "Chip resistors marking". Marking of AC series is the same as RC series.

## CONSTRUCTION

The resistors are constructed on top of an automotive grade ceramic body. Internal metal electrodes are added at each end and connected by a resistive glaze. The resistive glaze is covered by a protective glass.

The composition of the glaze is adjusted to give the approximately required resistance value and laser trimming of this resistive glaze achieves the value within tolerance. The whole element is covered by a protective overcoat. Size 0603 and bigger is marked with the resistance value on top. Finally, the two external terminations (Ni / matte tin) are added, as shown in Fig.8.


## OUTLINES

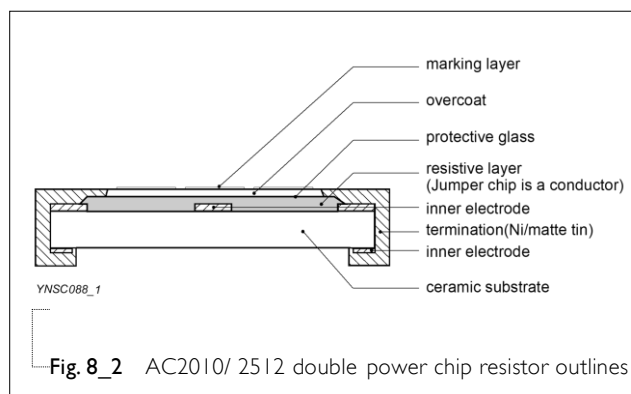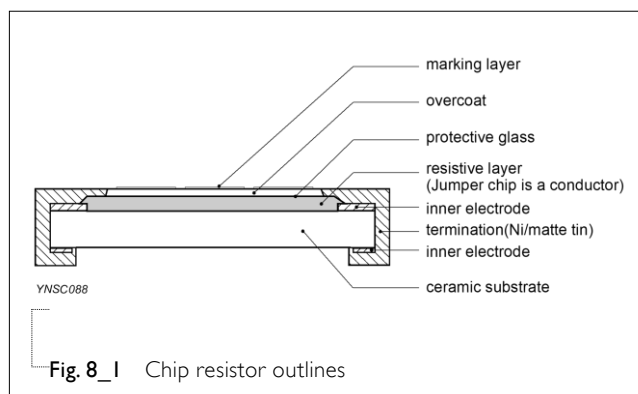

## DIMENSIONS

Table I For outlines, please refer to Fig. 9

| TYPE   | L (mm)     | W (mm)     | H (mm)     | l <sub>1</sub> (mm) | l <sub>2</sub> (mm) |
|--------|------------|------------|------------|---------------------|---------------------|
| AC0201 | 0.60 ±0.03 | 0.30 ±0.03 | 0.23 ±0.03 | 0.12 ±0.05          | 0.15 ±0.05          |
| AC0402 | 1.00 ±0.05 | 0.50 ±0.05 | 0.32 ±0.05 | 0.20 ±0.10          | 0.25 ±0.10          |
| AC0603 | 1.60 ±0.10 | 0.80 ±0.10 | 0.45 ±0.10 | 0.25 ±0.15          | 0.25 ±0.15          |
| AC0805 | 2.00 ±0.10 | 1.25 ±0.10 | 0.50 ±0.10 | 0.35 ±0.20          | 0.35 ±0.20          |
| AC1206 | 3.10 ±0.10 | 1.60 ±0.10 | 0.55 ±0.10 | 0.45 ±0.20          | 0.45 ±0.20          |
| AC1210 | 3.10 ±0.10 | 2.60 ±0.15 | 0.55 ±0.10 | 0.45 ±0.15          | 0.50 ±0.20          |
| AC1218 | 3.10 ±0.10 | 4.60 ±0.10 | 0.55 ±0.10 | 0.45 ±0.20          | 0.40 ±0.20          |
| AC2010 | 5.00 ±0.10 | 2.50 ±0.15 | 0.55 ±0.10 | 0.55 ±0.15          | 0.55 ±0.20          |
| AC2512 | 6.35 ±0.10 | 3.10 ±0.15 | 0.55 ±0.10 | 0.60 ±0.20          | 0.60 ±0.20          |

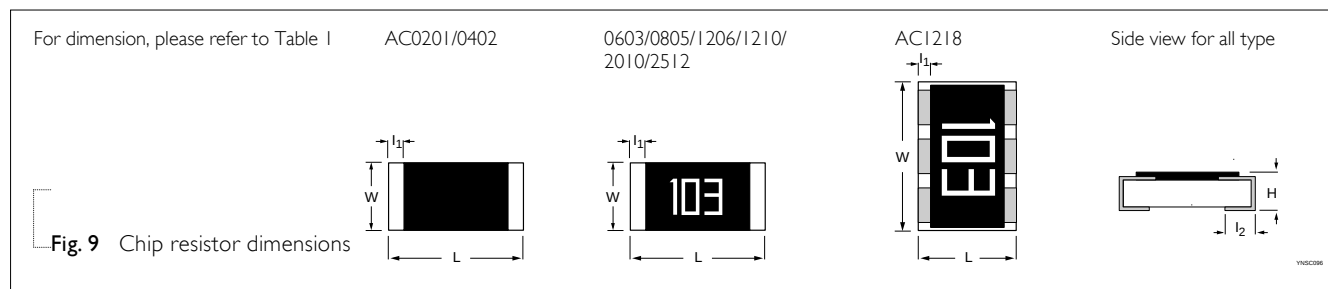

ELECTRICAL CHARACTERISTICS

Table 2

| TYPE   | POWER  | CHARACTERISTICS             |                      |                       |                                 |                                                |                                  |                 |
|--------|--------|-----------------------------|----------------------|-----------------------|---------------------------------|------------------------------------------------|----------------------------------|-----------------|
|        |        | Operating Temperature Range | Max. Working Voltage | Max. Overload Voltage | Dielectric Withstanding Voltage | Resistance Range                               | Temperature Coefficient          | Jumper Criteria |
| AC0201 | 1/20 W | -55°C to 155°C              | 25V                  | 50V                   | 50V                             | 5% (E24)                                       | $1\Omega \leq R \leq 10\Omega$   | Rated Current   |
|        |        |                             |                      |                       |                                 | $1\Omega \leq R \leq 10M\Omega$                | -100/+350 ppm°C                  | 0.5A            |
|        |        |                             |                      |                       |                                 | 1% (E24/E96)                                   | $10\Omega < R \leq 10M$          | Maximum         |
|        |        |                             |                      |                       |                                 | $1\Omega \leq R \leq 10M\Omega$                | $\pm 200$ ppm°C                  | Current         |
|        |        |                             |                      |                       |                                 | 0.5% (E24/E96)                                 |                                  | 1.0A            |
|        |        |                             |                      |                       |                                 | $10\Omega \leq R \leq 1M\Omega$<br>Jumper<50mΩ |                                  |                 |
| AC0402 | 1/16 W | -55°C to 155°C              | 50V                  | 100V                  | 100V                            | 5% (E24)                                       | $1\Omega \leq R \leq 10\Omega$   | Rated Current   |
|        |        |                             |                      |                       |                                 | $1\Omega \leq R \leq 22M\Omega$                | $\pm 200$ ppm°C                  | 1A              |
|        |        |                             |                      |                       |                                 | 0.5%, 1% (E24/E96)                             | $10\Omega < R \leq 10M\Omega$    | Maximum         |
|        |        |                             |                      |                       |                                 | $1\Omega \leq R \leq 10M\Omega$                | $\pm 100$ ppm°C                  | Current         |
|        |        |                             |                      |                       |                                 | Jumper<50mΩ                                    | $10M\Omega < R \leq 22M\Omega$   | 2A              |
|        |        |                             |                      |                       |                                 |                                                | $\pm 200$ ppm°C                  |                 |
| AC0603 | 1/8 W  | -55°C to 155°C              | 75V                  | 100V                  | 100V                            | 5% (E24)                                       | $1\Omega \leq R < 10\Omega$      | Rated Current   |
|        |        |                             |                      |                       |                                 | $1\Omega \leq R \leq 10M\Omega$                | $\pm 200$ ppm°C                  | 1A              |
|        |        |                             |                      |                       |                                 | 0.5%, 1% (E24/E96)                             | $10\Omega \leq R \leq 10M\Omega$ | Maximum         |
|        |        |                             |                      |                       |                                 | $1\Omega \leq R \leq 10M\Omega$                | $\pm 100$ ppm°C                  | Current         |
|        |        |                             |                      |                       |                                 | Jumper<50mΩ                                    | $10M\Omega < R \leq 22M\Omega$   | 2A              |
|        |        |                             |                      |                       |                                 |                                                | $\pm 200$ ppm°C                  |                 |
| AC0603 | 1/10 W | -55°C to 155°C              | 75V                  | 150V                  | 150V                            | 5% (E24)                                       | $1\Omega \leq R < 10\Omega$      | Rated Current   |
|        |        |                             |                      |                       |                                 | $1\Omega \leq R \leq 22M\Omega$                | $\pm 200$ ppm°C                  | 1A              |
|        |        |                             |                      |                       |                                 | 0.5%, 1% (E24/E96)                             | $10\Omega \leq R \leq 10M\Omega$ | Maximum         |
|        |        |                             |                      |                       |                                 | $1\Omega \leq R \leq 10M\Omega$                | $\pm 100$ ppm°C                  | Current         |
|        |        |                             |                      |                       |                                 | Jumper<50mΩ                                    | $10M\Omega < R \leq 22M\Omega$   | 2A              |
|        |        |                             |                      |                       |                                 |                                                | $\pm 200$ ppm°C                  |                 |
| AC0603 | 1/5 W  | -55°C to 155°C              | 75V                  | 150V                  | 150V                            | 5% (E24)                                       | $1\Omega \leq R < 10\Omega$      | Rated Current   |
|        |        |                             |                      |                       |                                 | $1\Omega \leq R \leq 10M\Omega$                | $\pm 200$ ppm°C                  | 1A              |
|        |        |                             |                      |                       |                                 | 0.5%, 1% (E24/E96)                             | $10\Omega \leq R \leq 10M\Omega$ | Maximum         |
|        |        |                             |                      |                       |                                 | $1\Omega \leq R \leq 10M\Omega$                | $\pm 100$ ppm°C                  | Current         |
|        |        |                             |                      |                       |                                 |                                                |                                  |                 |
|        |        |                             |                      |                       |                                 |                                                |                                  |                 |

| TYPE   | POWER | CHARACTERISTICS             |                      |                       |                                 |                                 |                                     |                 |
|--------|-------|-----------------------------|----------------------|-----------------------|---------------------------------|---------------------------------|-------------------------------------|-----------------|
|        |       | Operating Temperature Range | Max. Working Voltage | Max. Overload Voltage | Dielectric Withstanding Voltage | Resistance Range                | Temperature Coefficient             | Jumper Criteria |
| AC0805 | 1/8 W | -55°C to 155°C              | 150V                 | 300V                  | 300V                            | 5% (E24)                        | $1\Omega \leq R < 10\Omega$         | Rated Current   |
|        |       |                             |                      |                       |                                 | $1\Omega \leq R \leq 22M\Omega$ | $\pm 200 \text{ ppm}^\circ\text{C}$ | 2A              |
|        |       |                             |                      |                       |                                 | 0.5%, 1% (E24/E96)              | $10\Omega \leq R \leq 10M\Omega$    | Maximum         |
|        |       |                             |                      |                       |                                 | $1\Omega \leq R \leq 10M\Omega$ | $\pm 100 \text{ ppm}^\circ\text{C}$ | Current         |
|        |       |                             |                      |                       |                                 | Jumper < 50mΩ                   | $10M\Omega < R \leq 22M\Omega$      | 5A              |
| AC1206 | 1/4 W | -55°C to 155°C              | 150V                 | 300V                  | 300V                            | 5% (E24)                        | $1\Omega \leq R < 10\Omega$         | Rated Current   |
|        |       |                             |                      |                       |                                 | $1\Omega \leq R \leq 10M\Omega$ | $\pm 200 \text{ ppm}^\circ\text{C}$ | 2A              |
|        |       |                             |                      |                       |                                 | 0.5%, 1% (E24/E96)              | $10\Omega \leq R \leq 10M\Omega$    | Maximum         |
|        |       |                             |                      |                       |                                 | $1\Omega \leq R \leq 10M\Omega$ | $\pm 100 \text{ ppm}^\circ\text{C}$ | Current         |
|        |       |                             |                      |                       |                                 | Jumper < 50mΩ                   | $10M\Omega < R \leq 22M\Omega$      | 10A             |
| AC1210 | 1/2 W | -55°C to 155°C              | 200V                 | 400V                  | 500V                            | 5% (E24)                        | $1\Omega \leq R < 10\Omega$         | Rated Current   |
|        |       |                             |                      |                       |                                 | $1\Omega \leq R \leq 10M\Omega$ | $\pm 200 \text{ ppm}^\circ\text{C}$ | 2A              |
|        |       |                             |                      |                       |                                 | 0.5%, 1% (E24/E96)              | $10\Omega \leq R \leq 10M\Omega$    | Maximum         |
|        |       |                             |                      |                       |                                 | $1\Omega \leq R \leq 10M\Omega$ | $\pm 100 \text{ ppm}^\circ\text{C}$ | Current         |
|        |       |                             |                      |                       |                                 | Jumper < 50mΩ                   | $10M\Omega < R \leq 22M\Omega$      | 10A             |
| AC1210 | 1 W   | -55°C to 155°C              | 200V                 | 500V                  | 500V                            | 5% (E24)                        | $1\Omega \leq R < 10\Omega$         | Rated Current   |
|        |       |                             |                      |                       |                                 | $1\Omega \leq R \leq 10M\Omega$ | $\pm 200 \text{ ppm}^\circ\text{C}$ | 2A              |
|        |       |                             |                      |                       |                                 | 0.5%, 1% (E24/E96)              | $10\Omega \leq R \leq 10M\Omega$    | Maximum         |
|        |       |                             |                      |                       |                                 | $1\Omega \leq R \leq 10M\Omega$ | $\pm 100 \text{ ppm}^\circ\text{C}$ | Current         |
|        |       |                             |                      |                       |                                 | Jumper < 50mΩ                   | $10M\Omega < R \leq 22M\Omega$      | 10A             |

| TYPE   | POWER | CHARACTERISTICS             |                      |                       |                                 |                                 |                                     |                 |
|--------|-------|-----------------------------|----------------------|-----------------------|---------------------------------|---------------------------------|-------------------------------------|-----------------|
|        |       | Operating Temperature Range | Max. Working Voltage | Max. Overload Voltage | Dielectric Withstanding Voltage | Resistance Range                | Temperature Coefficient             | Jumper Criteria |
| AC1218 | 1 W   | -55°C to 155°C              | 200V                 | 500V                  | 500V                            | 5% (E24)                        | $1\Omega \leq R < 10\Omega$         | Rated Current   |
|        |       |                             |                      |                       |                                 | $1\Omega \leq R \leq 1M\Omega$  | $\pm 200 \text{ ppm}^\circ\text{C}$ | 6A              |
|        |       |                             |                      |                       |                                 | 0.5%, 1% (E24/E96)              | $10\Omega \leq R \leq 1M\Omega$     | Maximum         |
|        |       |                             |                      |                       |                                 | $1\Omega \leq R \leq 1M\Omega$  | $\pm 100 \text{ ppm}^\circ\text{C}$ | Current         |
| AC2010 | 3/4 W | -55°C to 155°C              | 200V                 | 500V                  | 500V                            | Jumper<50mΩ                     | $10M\Omega < R \leq 22M\Omega$      | 10A             |
|        |       |                             |                      |                       |                                 | 5% (E24)                        | $1\Omega \leq R < 10\Omega$         | Rated Current   |
|        |       |                             |                      |                       |                                 | $1\Omega \leq R \leq 1M\Omega$  | $\pm 200 \text{ ppm}^\circ\text{C}$ | 2A              |
|        |       |                             |                      |                       |                                 | 0.5%, 1% (E24/E96)              | $10\Omega \leq R \leq 10M\Omega$    | Maximum         |
| AC2512 | 2 W   | -55°C to 155°C              | 200V                 | 500V                  | 500V                            | $1\Omega \leq R \leq 10M\Omega$ | $\pm 100 \text{ ppm}^\circ\text{C}$ | Current         |
|        |       |                             |                      |                       |                                 | Jumper<50mΩ                     | $10M\Omega < R \leq 22M\Omega$      | 10A             |
|        |       |                             |                      |                       |                                 | 5% (E24)                        | $1\Omega \leq R < 10\Omega$         | Rated Current   |
|        |       |                             |                      |                       |                                 | $1\Omega \leq R \leq 22M\Omega$ | $\pm 200 \text{ ppm}^\circ\text{C}$ | 2A              |
| AC2512 | 2 W   | -55°C to 155°C              | 200V                 | 500V                  | 500V                            | 0.5%, 1% (E24/E96)              | $10\Omega \leq R \leq 10M\Omega$    | Maximum         |
|        |       |                             |                      |                       |                                 | $1\Omega \leq R \leq 10M\Omega$ | $\pm 100 \text{ ppm}^\circ\text{C}$ | Current         |
|        |       |                             |                      |                       |                                 | Jumper<50mΩ                     | $10M\Omega < R \leq 22M\Omega$      | 10A             |
|        |       |                             |                      |                       |                                 | 5% (E24)                        | $1\Omega \leq R < 10\Omega$         | Rated Current   |
| AC2512 | 2 W   | -55°C to 155°C              | 200V                 | 500V                  | 500V                            | $1\Omega \leq R \leq 10M\Omega$ | $\pm 200 \text{ ppm}^\circ\text{C}$ | 2A              |
|        |       |                             |                      |                       |                                 | 0.5%, 1% (E24/E96)              | $10\Omega \leq R \leq 10M\Omega$    | Maximum         |
|        |       |                             |                      |                       |                                 | $1\Omega \leq R \leq 10M\Omega$ | $\pm 100 \text{ ppm}^\circ\text{C}$ | Current         |
|        |       |                             |                      |                       |                                 | Jumper<50mΩ                     | $10M\Omega < R \leq 22M\Omega$      | 10A             |

Table 3 Table 3 for low TCR

| TYPE   | POWER  | CHARACTERISTICS             |                      |                       |                                 |                                                               |                                    |
|--------|--------|-----------------------------|----------------------|-----------------------|---------------------------------|---------------------------------------------------------------|------------------------------------|
|        |        | Operating Temperature Range | Max. Working Voltage | Max. Overload Voltage | Dielectric Withstanding Voltage | Resistance Range                                              | Temperature Coefficient            |
| AC0402 | 1/16 W | -55°C to 155°C              | 50V                  | 100V                  | 100V                            | 0.1%, 0.5%, 1% (E24/E96)<br>$10\Omega \leq R \leq 1M\Omega$   | $\pm 50 \text{ ppm}^\circ\text{C}$ |
|        | 1/8 W  | -55°C to 155°C              | 50V                  | 100V                  | 100V                            | 0.1%, 0.5%, 1% (E24/E96)<br>$10\Omega \leq R \leq 1M\Omega$   | $\pm 50 \text{ ppm}^\circ\text{C}$ |
| AC0603 | 1/10 W | -55°C to 155°C              | 75V                  | 150V                  | 150V                            | 0.1%, 0.5%, 1% (E24/E96)<br>$10\Omega \leq R \leq 1M\Omega$   | $\pm 50 \text{ ppm}^\circ\text{C}$ |
|        | 1/5 W  | -55°C to 155°C              | 75V                  | 150V                  | 150V                            | 0.1%, 0.5%, 1% (E24/E96)<br>$10\Omega \leq R \leq 1M\Omega$   | $\pm 50 \text{ ppm}^\circ\text{C}$ |
| AC0805 | 1/8 W  | -55°C to 155°C              | 150V                 | 300V                  | 300V                            | 0.1%, 0.5%, 1% (E24/E96)<br>$10\Omega \leq R \leq 1M\Omega$   | $\pm 50 \text{ ppm}^\circ\text{C}$ |
|        | 1/4 W  | -55°C to 155°C              | 150V                 | 300V                  | 300V                            | 0.1%, 0.5%, 1% (E24/E96)<br>$10\Omega \leq R \leq 1M\Omega$   | $\pm 50 \text{ ppm}^\circ\text{C}$ |
| AC1206 | 1/4 W  | -55°C to 155°C              | 200V                 | 400V                  | 500V                            | 0.1%, 0.5%, 1% (E24/E96)<br>$10\Omega \leq R \leq 7.5M\Omega$ | $\pm 50 \text{ ppm}^\circ\text{C}$ |
|        | 1/2 W  | -55°C to 155°C              | 200V                 | 400V                  | 500V                            | 0.1%, 0.5%, 1% (E24/E96)<br>$10\Omega \leq R \leq 7.5M\Omega$ | $\pm 50 \text{ ppm}^\circ\text{C}$ |

**FOOTPRINT AND SOLDERING PROFILES**

Recommended footprint and soldering profiles of AC-series is the same as RC-series. Please refer to data sheet "Chip resistors mounting".

**PACKING STYLE AND PACKAGING QUANTITY**

Table 4 Packing style and packaging quantity

| PACKING STYLE            | REEL<br>DIMENSION | AC0201 | AC0402 | AC0603 | AC0805 | AC1206 | AC1210 | AC1218 | AC2010 | AC2512 |
|--------------------------|-------------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Paper taping reel (R)    | 7" (178 mm)       | 10,000 | 10,000 | 5,000  | 5,000  | 5,000  | 5,000  | ---    | ---    | ---    |
|                          | 13" (330 mm)      | 50,000 | 50,000 | 20,000 | 20,000 | 20,000 | 20,000 | ---    | ---    | ---    |
| Embossed taping reel (K) | 7" (178 mm)       | ---    | ---    | ---    | ---    | ---    | ---    | 4,000  | 4,000  | 4,000  |
|                          | 13" (330 mm)      | ---    | ---    | ---    | ---    | ---    | ---    | ---    | 16,000 | ---    |

**NOTE**

I. For paper/embossed tape and reel specifications/dimensions, please refer to data sheet "Chip resistors packing".

**FUNCTIONAL DESCRIPTION****OPERATING TEMPERATURE RANGE**

Range: -55 °C to +155 °C

**POWER RATING**

Each type rated power at 70 °C:

AC0201=1/20W (0.05W)

AC0402=1/16W (0.0625W); 1/8W (0.125W)

AC0603=1/10W (0.1W); 1/5W (0.2W)

AC0805=1/8W (0.125W); 1/4 W(0.25 W)

AC1206=1/4W (0.25W); 1/2 W (0.5 W)

AC1210=1/2W (0.5W); 1W

AC1218=1W; 1.5W

AC2010=3/4W (0.75W); 1.25W

AC2512=1 W; 2W

**RATED VOLTAGE**

The DC or AC (rms) continuous working voltage corresponding to the rated power is determined by the following formula:

$$V = \sqrt{P \times R}$$

Or Maximum working voltage whichever is less

Where

V = Continuous rated DC or AC (rms) working voltage (V)

P = Rated power (W)

R = Resistance value ( $\Omega$ )

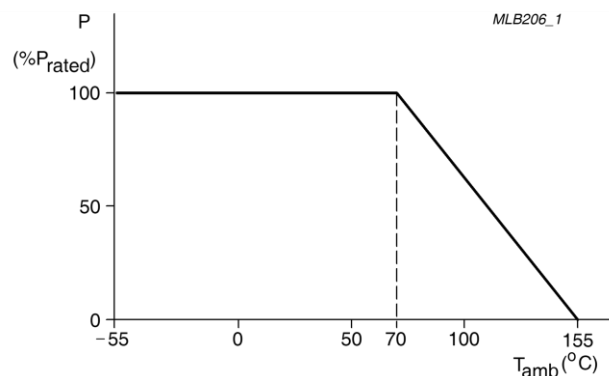


Fig. 10 Maximum dissipation ( $P_{max}$ ) in percentage of rated power as a function of the operating ambient temperature ( $T_{amb}$ )

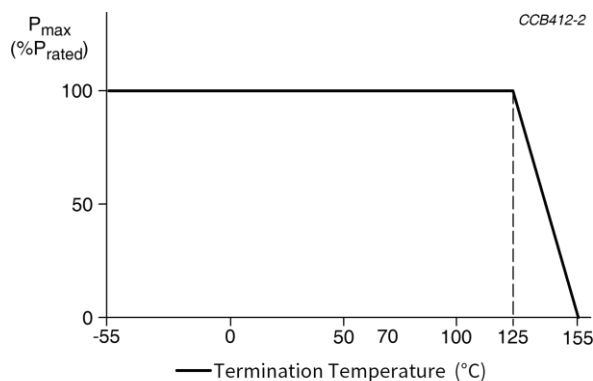


Fig. 11 Maximum dissipation (P) in percentage of rated power as a function of the terminal temperature.

## TESTS AND REQUIREMENTS

Table 5 Test condition, procedure and requirements

| TEST                         | TEST METHOD                                | PROCEDURE                                                                                                                                                                                       | REQUIREMENTS                                                                                                               |
|------------------------------|--------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| High Temperature Exposure    | AEC-Q200 Test 3<br>MIL-STD-202 Method 108  | 1,000 hours at $T_A = 155\text{ }^{\circ}\text{C}$ , unpowered                                                                                                                                  | $\pm(1.0\%+0.05\Omega)$ for D/F tol<br>$\pm(2.0\%+0.05\Omega)$ for J tol<br><50 m $\Omega$ for Jumper                      |
| Moisture Resistance          | MIL-STD-202 Method 106                     | Each temperature / humidity cycle is defined at 8 hours, 3 cycles / 24 hours for 10d. with 25 $^{\circ}\text{C}$ / 65 $^{\circ}\text{C}$ 95% R.H, without steps 7a & 7b, unpowered              | $\pm(0.5\%+0.05\Omega)$ for D/F tol<br>$\pm(2.0\%+0.05\Omega)$ for J tol<br><100 m $\Omega$ for Jumper                     |
| Biased Humidity              | AEC-Q200 Test 7<br>MIL-STD-202 Method 103  | 1,000 hours; 85 $^{\circ}\text{C}$ / 85% RH<br>10% of operating power<br>Measurement at 24 $\pm$ 4 hours after test conclusion.                                                                 | $\pm(1.0\%+0.05\Omega)$ for D/F tol<br>$\pm(3.0\%+0.05\Omega)$ for J tol<br><100 m $\Omega$ for Jumper                     |
| Operational Life             | AEC-Q200 Test 8<br>MIL-STD-202 Method 108  | 1,000 hours at 125 $^{\circ}\text{C}$ , derated voltage applied for 1.5 hours on, 0.5 hour off, still-air required                                                                              | $\pm(1.0\%+0.05\Omega)$ for D/F tol<br>$\pm(3.0\%+0.05\Omega)$ for J tol<br><100 m $\Omega$ for Jumper                     |
| Resistance to Soldering Heat | AEC-Q200 Test 15<br>MIL-STD-202 Method 210 | Condition B, no pre-heat of samples<br>Lead-free solder, 260 $\pm$ 5 $^{\circ}\text{C}$ , 10 $\pm$ 1 seconds immersion time<br>Procedure 2 for SMD: devices fluxed and cleaned with isopropanol | $\pm(0.5\%+0.05\Omega)$ for D/F tol<br>$\pm(1.0\%+0.05\Omega)$ for J tol<br><50 m $\Omega$ for Jumper<br>No visible damage |
| Thermal Shock                | MIL-STD-202 Method 107                     | -55/+125 $^{\circ}\text{C}$<br>Number of cycles is 300. Devices mounted<br>Maximum transfer time is 20 seconds.<br>Dwell time is 15 minutes. Air – Air                                          | $\pm(0.5\%+0.05\Omega)$ for D/F tol<br>$\pm(1.0\%+0.05\Omega)$ for J tol<br><50 m $\Omega$ for Jumper                      |
| ESD                          | AEC-Q200 Test 17<br>AEC-Q200-002           | Human Body Model,<br>1 <sub>pos.</sub> + 1 <sub>neg.</sub> discharges<br>0201: 500V<br>0402/0603: 1KV<br>0805 and above: 2KV                                                                    | $\pm(3.0\%+0.05\Omega)$<br><50 m $\Omega$ for Jumper                                                                       |

| TEST                                           | TEST METHOD                      | PROCEDURE                                                                                                                                                                                                                                                                                                                                                                       | REQUIREMENTS                                                              |
|------------------------------------------------|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------|
| Solderability<br>- Wetting                     | AEC-Q200 Test I8<br>J-STD-002    | Electrical Test not required Magnification 50X<br>SMD conditions:<br>(a) Method B, aging 4 hours at 155 °C dry heat, dipping at 235±3 °C for 5±0.5 seconds.<br>(b) Method B, steam aging 8 hours, dipping at 215±3 °C for 5±0.5 seconds.<br>(c) Method D, steam aging 8 hours, dipping at 260±3 °C for 30±0.5 seconds.                                                          | Well tinned (≥95% covered)<br>No visible damage                           |
| Board Flex                                     | AEC-Q200 Test 21<br>AEC-Q200-005 | Chips mounted on a 100mm × 40mm glass epoxy resin PCB (FR4)<br>Bending for 0201/0402: 5 mm<br>0603/0805: 3 mm<br>1206 and above: 2 mm<br>Holding time: minimum 60 seconds                                                                                                                                                                                                       | ±(1.0%+0.05Ω)<br><50 mΩ for Jumper                                        |
| Temperature Coefficient of Resistance (T.C.R.) | MIL-STD-202 Method 304           | At +25/−55 °C and +25/+125 °C<br><br><b>Formula:</b><br>$T.C.R = \frac{R_2 - R_1}{R_1(t_2 - t_1)} \times 10^6 \text{ (ppm/°C)}$<br>Where<br>t <sub>1</sub> =+25 °C or specified room temperature<br>t <sub>2</sub> =−55 °C or +125 °C test temperature<br>R <sub>1</sub> =resistance at reference temperature in ohms<br>R <sub>2</sub> =resistance at test temperature in ohms | Refer to table 2                                                          |
| Short Time Overload                            | IEC60115-1 8.1                   | 2.5 times of rated voltage or maximum overload voltage whichever is less for 5 sec at room temperature                                                                                                                                                                                                                                                                          | ±(1.0%+0.05Ω) for D/F tol<br>±(2.0%+0.05Ω) for J tol<br><50 mΩ for Jumper |
| FOS                                            | ASTM-B-809-95                    | Sulfur (saturated vapor) 500 hours, 60±2°C, unpowered                                                                                                                                                                                                                                                                                                                           | ±(1.0%+0.05Ω)                                                             |

REVISION HISTORY

| REVISION   | DATE          | CHANGE NOTIFICATION | DESCRIPTION                                                                                                                                                              |
|------------|---------------|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Version 11 | Nov. 17, 2023 | -                   | - Combine low TCR, upgrade TCR (60ppm to 50ppm) for AC1206-1Mohm to 7.5Mohm (low TCR) and add double power for low TCR.<br>Add power rating of the terminal temperature. |
| Version 10 | Jan. 04, 2023 | -                   | - 10ohm TCR upgrade to 100ppm, for 0603~2512 normal power and 0402~2512 double power.                                                                                    |
| Version 9  | Aug. 02, 2022 | -                   | - I2 dimension updated, for size 1206, size 2010, size 2512.                                                                                                             |
| Version 8  | Mar. 19, 2021 | -                   | - Upgrade the working voltage of 0402 double power to 75V                                                                                                                |
| Version 7  | July 10, 2017 | -                   | - Add "3W" part number coding for 13" Reel & double power                                                                                                                |
| Version 6  | May 31, 2017  | -                   | - Add 10" packing                                                                                                                                                        |
| Version 5  | Dec. 07, 2015 | -                   | - Add in AC double power                                                                                                                                                 |
| Version 4  | May 25, 2015  | -                   | - Remove 7D packing<br>- Extend resistance range<br>- Add in AC0201<br>- Update FOS test and requirements                                                                |
| Version 3  | Feb 13, 2014  | -                   | - Feature description updated<br>- add $\pm 0.5\%$<br>- delete 10" taping reel                                                                                           |
| Version 2  | Feb. 10, 2012 | -                   | - Jumper criteria added<br>- AC1218 marking and outline figure updated                                                                                                   |
| Version 1  | Feb. 01, 2011 | -                   | - Case size 1210, 1218, 2010, 2512 extended<br>- Test method and procedure updated<br>- Packing style of 7D added                                                        |
| Version 0  | Nov. 10, 2010 | -                   | - First issue of this specification                                                                                                                                      |

LEGAL DISCLAIMER

YAGEO, its distributors and agents (collectively, “YAGEO”), hereby disclaims any and all liabilities for any errors, inaccuracies or incompleteness contained in any product related information, including but not limited to product specifications, datasheets, pictures and/or graphics. YAGEO may make changes, modifications and/or improvements to product related information at any time and without notice.

YAGEO makes no representation, warranty, and/or guarantee about the fitness of its products for any particular purpose or the continuing production of any of its products. To the maximum extent permitted by law, YAGEO disclaims (i) any and all liability arising out of the application or use of any YAGEO product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for a particular purpose, non-infringement and merchantability.

YAGEO products are designed for general purpose applications under normal operation and usage conditions. Please contact YAGEO for the applications listed below which require especially high reliability for the prevention of defects which might directly cause damage to the third party's life, body or property: Aerospace equipment (artificial satellite, rocket, etc.), Atomic energy-related equipment, Aviation equipment, Disaster prevention equipment, crime prevention equipment, Electric heating apparatus, burning equipment, Highly public information network equipment, data-processing equipment, Medical devices, Military equipment, Power generation control equipment, Safety equipment, Traffic signal equipment, Transportation equipment and Undersea equipment, or for any other application or use in which the failure of YAGEO products could result in personal injury or death, or serious property damage. Particularly **YAGEO Corporation and its affiliates do not recommend the use of commercial or automotive grade products for high reliability applications or manned space flight.**

Information provided here is intended to indicate product specifications only. YAGEO reserves all the rights for revising this content without further notification, as long as products are unchanged. Any product change will be announced by PCN.