


**Mini Relay K (Open – Sealed)**

- Limiting continuous current 20A
- 24VDC coil versions available

Typical applications

Car alarm, hazard warning signal, heated rear screen, immobilizer, lamps front/rear, fog light, interior lights, sun roof, turn signal, wiper control.

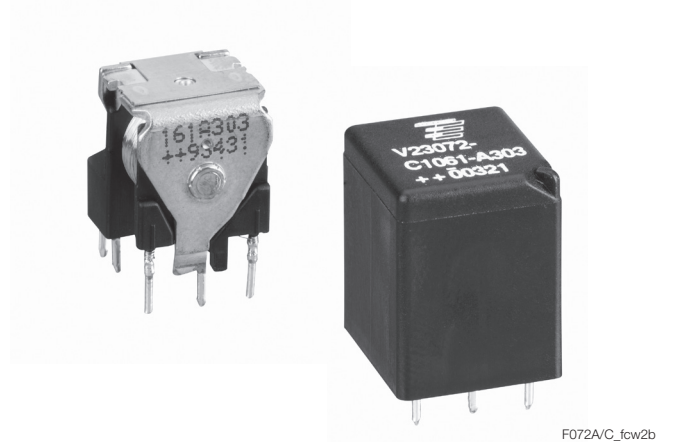


**Contact Data**

Load	resistive/inductive load V23072-C10**-A302	resistive/inductive load V23072-C10**-A303	resistive/inductive load V23072-C10**-A308	head/indicator lamp V23072-C1061-A402	head/indicator lamp V23072-C1061 A408
Contact arrangement	1 form A, 1 NO	1 form C, 1 CO	1 form U/X, 2 NO	1 form A, 1 NO	1 form U/X, 2 NO
Rated voltage	12VDC	12VDC	12VDC	12VDC	12VDC
Rated current	15A	10/15A	2x10A	12A	2x6A
Limiting continuous current					
23°C	15A	10/15A	2x10A	12A	2x6A
85°C	10A	5/10A	2x6A	10A	2x5A
Limiting making current <sup>1)2)</sup>	60A	NC/NO 12/60A	2x40A	60A <sup>3)</sup>	120A <sup>3)</sup>
Limiting breaking current	20A	10/20A	2x20A	6A	12A
Contact material	AgNi0.15	AgNi0.15	AgNi0.15	AgSnO.2	AgSnO.2
Min. recommended contact load <sup>4)</sup>	1A at 5VDC	1A at 5VDC	1A at 5VDC	1A at 5VDC	1A at 5VDC
Initial voltage drop at 10A, typ./max. 150/300mV		50/300mV	50/300mV	2x50/300mV	150/300mV
Operate/release time max.			typ. 3/1.5ms <sup>5)</sup>		
Electrical endurance	>2x10 <sup>5</sup> ops. at 13.5VDC, 10A	>2x10 <sup>5</sup> ops. at 13.5VDC, 10A	>2x10 <sup>5</sup> ops. at 13.5VDC, 10A	>1x10 <sup>6</sup> ops. up to 6x21W >1.5x10 <sup>5</sup> ops. 100A (on), 10 A (off) high beam	>1.5 x 10 <sup>6</sup> ops. up to 6x21W >7.5x10 <sup>5</sup> ops. 100A (on), 10A (off) high beam

- 1) The values apply to a resistive load or inductive load with suitable spark suppression and at maximum 13.5VDC for 12VDC and 27VDC for 24VDC load voltages.
- 2) For a load current duration of maximum 3s for a make/break ratio of 1:10.
- 3) Corresponds to the peak inrush current on initial actuation (cold filament).
- 4) See chapter Diagnostics of Relays in our Application Notes or consult the internet at <http://relays.te.com/appnotes>
- 5) For unsuppressed relay coil. A low resistive suppression device in parallel to the relay coil increases the release time and reduces the lifetime caused by increased erosion and/or higher risk of contact tack welding (monostable version only).

**Max. DC load breaking capacity**

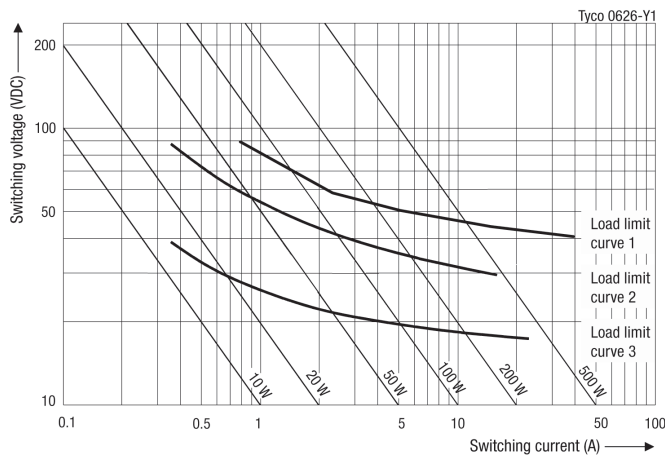

Load limit curve 1: safe shutdown, connected as form X, load on pin 5 and 7.  
 Load limit curve 2: safe shutdown, no stationary arc (NO contact).  
 Load limit curve 3: arc extinguishes during transit time (CO contact).  
 Load limit curves measured with low inductive resistors verified for 1000 switching events.

**Mini Relay K (Open – Sealed)** (Continued)

**Coil Data**


Rated coil voltage	12VDC, 24VDC
--------------------	--------------

**Coil versions, DC coil**

Coil code	Rated voltage VDC	Operate voltage VDC	Release voltage VDC	Coil resistance $\Omega \pm 10\%$	Rated coil power W
061	12	6.9	1.2	130	1.1
062	24	14.1	2.4	520	1.1

All figures are given for coil without pre-energization, at ambient temperature +23°C.

**Coil operating range**

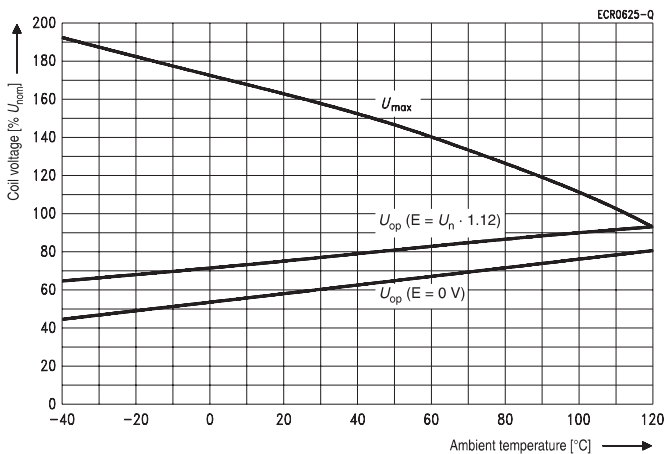


Does not take into account the temperature rise due to the contact current  
E = pre-energization.

**Terminal Assignment (Open and Sealed version)**


Bottom view on solder pins

1 form A, NO




TE1111-U1

1 form U/X, 2 NO



TE1116-11

1 form C, CO



TE1077-B1

**Other Data**

EU RoHS/ELV compliance	compliant	
Degree of protection	IEC 61810	
	RT II – open (V23072-A),	
	RT III – imm. cleanable (V23072-C)	
Climatic cycling with condensation	EN ISO 6988	
	20 cycles, storage 8/16h	
Temperature cycling (shock)	IEC 60068-2-14, Na	
	720 cycles, -40/+85°C (dwell time 1h)	
Damp heat constant	IEC 60068-2-3, Ca	
	56 days, upper air temperature 55°C	
Corrosive gas	IEC 60068-2-42	
	10 days	
	IEC 60068-2-43	
	10 days	
Vibration resistance (functional)	IEC 60068-2-6 (sine sweep), 10 to 200Hz,	
	23 to 35g <sup>6)</sup>	
Shock resistance (functional)	IEC 60068-2-27 (half sine), 4 to 6ms	
	23 to 280g <sup>6)</sup>	
Terminal type	PCB	
Weight, open/sealed	approx. 8/9g (0.28/0.32oz)	
Solderability (aging 3: 4h/155°C)	IEC 60068-2-20	
	Ta, method 1, hot dip 5s, 215°C	
Sealing, IEC 60068-2-17	Qc, method 2, 1min/70°C	
Storage conditions	according IEC 60068 <sup>7)</sup>	
Packaging unit	open	
	600 pcs.	
	sealed	
	504 pcs.	


6) Values weakest direction. Depending on mounting position: no change in the switching state >10µs.

7) For general storage and processing recommendations please refer to our Application Notes and especially to Storage in the Definitions or at <http://relays.te.com/appnotes/>


**Mini Relay K (Open – Sealed) (Continued)**

**Dimensions**


Mini Relay K Open Version

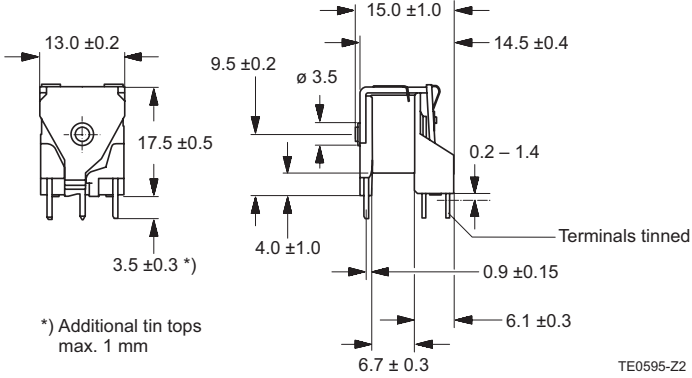


Mini Relay K Sealed Version

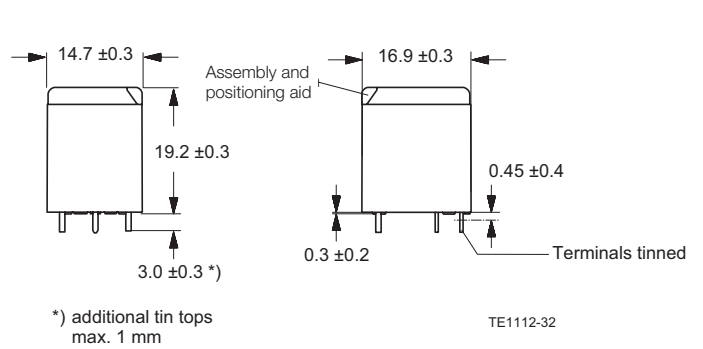

View of the terminals (bottom view)

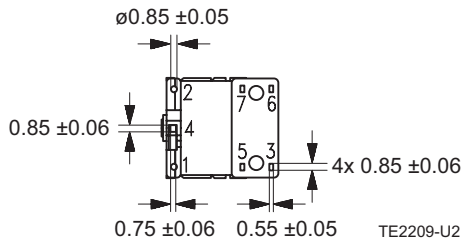


View of the terminals (bottom view)

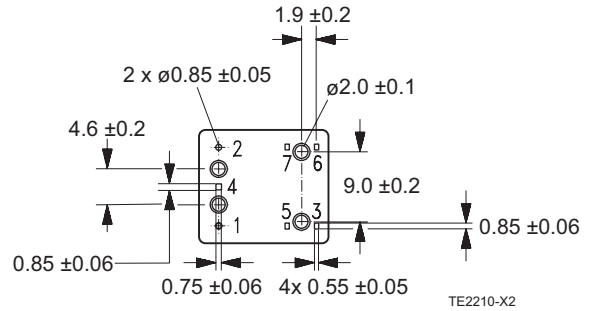

**PCB Layout**

Bottom view on solder pins, grid 1.25 to 1.27mm

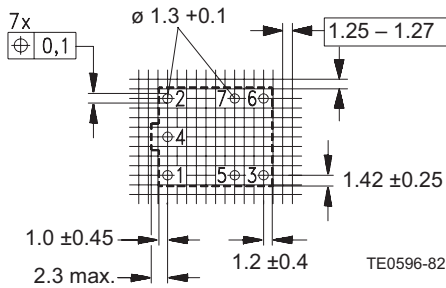

**PCB Layout**

Bottom view on solder pins, grid 1.25 to 1.27mm

