

RF/Microwave Capacitors

RF/Microwave C0G (NP0) Capacitors


Ultra Low ESR "U" Series, C0G (NP0) Capacitors (RoHS)



GENERAL INFORMATION


"U" Series capacitors are C0G (NP0) chip capacitors specially designed for "Ultra" low ESR for applications in the communications market. Max ESR and effective capacitance are met on each value producing lot to lot uniformity. Sizes available are EIA chip sizes 0603, 0805, and 1210.

DIMENSIONS: inches (millimeters)

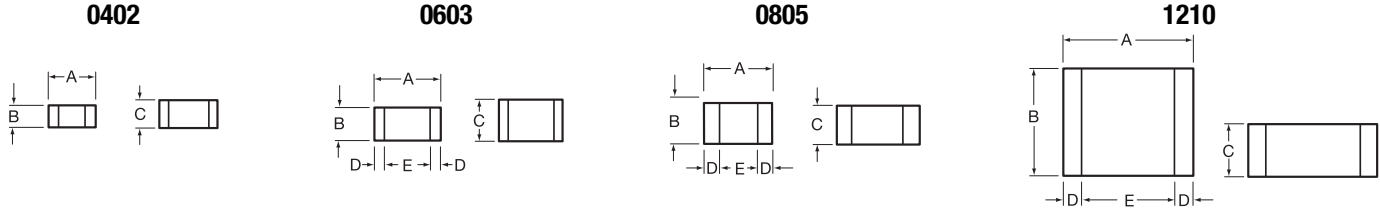

Size	A	B	C	D	E
0402	0.039±0.004 (1.00±0.1)	0.020±0.004 (0.50±0.1)	0.024 (0.6) max	0.010 ± 0.006 (0.25 ± 0.15)	0.014 (0.36) min
0603	0.060±0.010 (1.52±0.25)	0.030±0.010 (0.76±0.25)	0.036 (0.91) max	0.010 ± 0.005 (0.25 ± 0.13)	0.030 (0.76) min
0805	0.079±0.008 (2.01±0.2)	0.049±0.008 (1.25±0.2)	0.045 (1.15mm) max	0.020 ± 0.010 (0.51 ± 0.254)	0.020 (0.51) min
1210	0.126±0.008 (3.2±0.2)	0.098±0.008 (2.49±0.2)	0.055 (1.40mm) max	0.025 ± 0.015 (0.635 ± 0.381)	0.040 (1.02) min

HOW TO ORDER

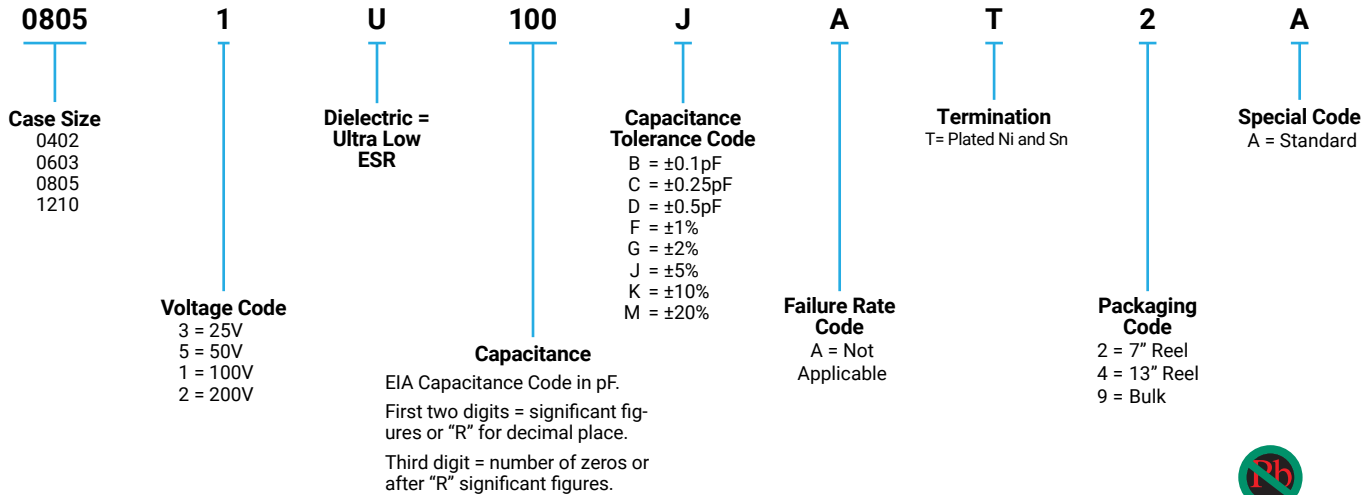

ELECTRICAL CHARACTERISTICS

Capacitance Values and Tolerances:

Size 0402 - 0.2 pF to 22 pF @ 1 MHz
 Size 0603 - 1.0 pF to 100 pF @ 1 MHz
 Size 0805 - 1.6 pF to 160 pF @ 1 MHz
 Size 1210 - 2.4 pF to 1000 pF @ 1 MHz

Temperature Coefficient of Capacitance (TC):

0±30 ppm/°C (-55° to +125°C)

Insulation Resistance (IR):

10¹² Ω min. @ 25°C and rated WVDC
 10¹¹ Ω min. @ 125°C and rated WVDC

Working Voltage (WVDC):

Size Working Voltage
 0402 - 50, 25 WVDC
 0603 - 200, 100, 50 WVDC
 0805 - 200, 100 WVDC
 1210 - 200, 100 WVDC

Dielectric Working Voltage (DWV):

250% of rated WVDC

Equivalent Series Resistance Typical (ESR):

0402 - See Performance Curve, page 300
 0603 - See Performance Curve, page 300
 0805 - See Performance Curve, page 300
 1210 - See Performance Curve, page 300

Marking

Laser marking EIA J marking standard (except 0603) (capacitance code and tolerance upon request).



RF/Microwave Capacitors

RF/Microwave C0G (NP0) Capacitors

Ultra Low ESR “U” Series, C0G (NP0) Capacitors (RoHS)



CAPACITANCE RANGE

Cap (pF)	Available Tolerance	Size			
		0402	0603	0805	1210
0.2	B,C	50V	N/A	N/A	N/A
0.3	↓				
0.4	B,C				
0.5	↓				
0.6	B,C,D				
0.7	↓				
0.8	B,C,D				
0.9	↓				

Cap (pF)	Available Tolerance	Size			
		0402	0603	0805	1210
1.0	B,C,D	50V	200V	200V	200V
1.1	↓				
1.2	↓				
1.3	↓				
1.4	↓				
1.5	↓				
1.6	↓				
1.7	↓				
1.8	↓				
1.9	↓				
2.0	↓				
2.1	↓				
2.2	↓				
2.4	↓				
2.7	↓				
3.0	↓				
3.3	↓				
3.6	↓				
3.9	↓				
4.3	↓				
4.7	↓				
5.1	↓				
5.6	↓				
6.2	B,C,D				
6.8	B,C,J,K,M				


Cap (pF)	Available Tolerance	Size			
		0402	0603	0805	1210
7.5	B,C,J,K,M	50V	200V	200V	200V
8.2	↓				
9.1	B,C,J,K,M				
10	F,G,J,K,M				
11	↓				
12	↓				
13	↓				
15	↓				
18	↓				
20	↓				
22	↓				
24	↓				
27	↓				
30	↓				
33	↓				
36	↓				
39	↓				
43	↓				
47	↓				
51	↓				
56	↓				
68	↓				
75	↓				
82	↓				
91	↓				

Cap (pF)	Available Tolerance	Size			
		0402	0603	0805	1210
100	F,G,J,K,M	N/A	100V	200V	200V
110	↓		50V	↓	
120	↓		50V	100V	
130	↓		N/A	200V	
140	↓			100V	
150	↓			↓	
160	↓			100V	
180	↓			N/A	
200	↓				
220	↓				
270	↓				
300	↓				
330	↓				
360	↓				
390	↓				
430	↓				
470	↓				
510	↓				
560	↓				
620	↓				
680	↓				
750	↓				
820	↓				
910	↓				
1000	F,G,J,K,M				

ULTRA LOW ESR, “U” SERIES


TYPICAL ESR vs. FREQUENCY

0402 “U” SERIES

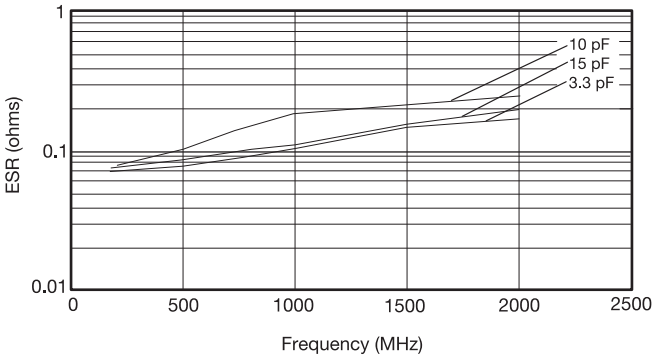


TYPICAL ESR vs. FREQUENCY

0603 “U” SERIES

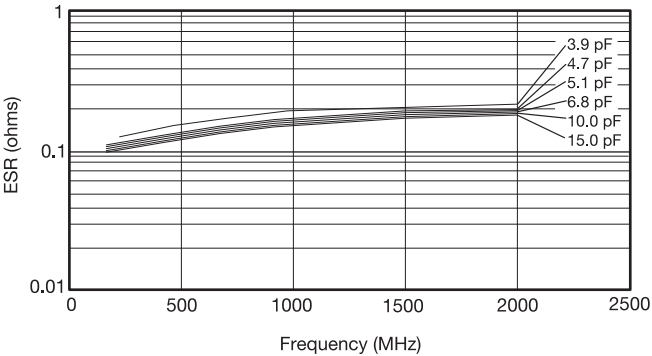


TYPICAL ESR vs. FREQUENCY

0805 “U” SERIES

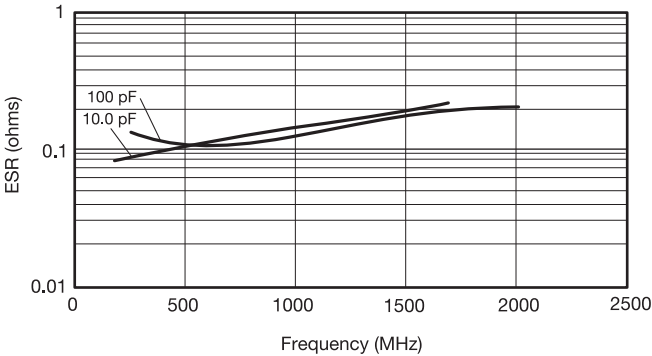

TYPICAL ESR vs. FREQUENCY

1210 “U” SERIES

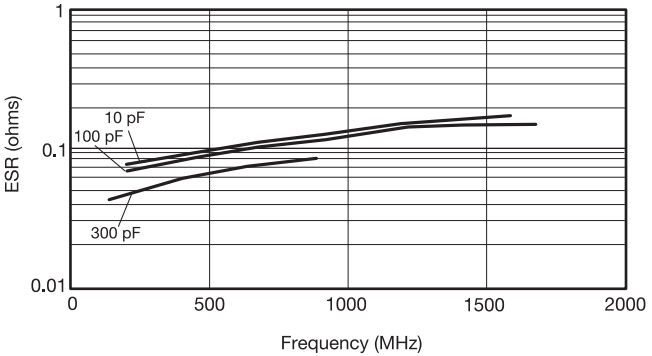

ESR Measured on the Boonton 34A

TYPICAL
SERIES RESONANT FREQUENCY
"U" SERIES CHIP

