



OF84005

840-870 MHz 5 dBi Gain Omnidirectional Antenna

FIBERGLASS BASE STATION ANTENNAS FEATURE COMPONENTS THAT PERFORM IN EXTREME CONDITIONS

The OF84005 omnidirectional base station antenna incorporates a collinear design that is enclosed in high density fiberglass, which is covered with a protective ultraviolet inhibiting coating. The radiating elements are carefully phased to provide maximum gain in the horizontal plane. The mounting sleeves are tuned to eliminate RF currents from the transmission line, resulting in a “cold” sleeve that allows for greater freedom in mounting. The antenna’s high quality and well-focused beam provides the best efficiency with highest gain.

FEATURES

- Mesh networking vertically polarized omni-directionals
- Various gains available: 5dBi to 12dBi
- Various frequencies available: 2.4GHz 3.5GHz, 4.9GHz, 5GHz, also tri-band model
- Type N male integrated connector
- Rugged, lightweight, and waterproof

MARKETS


- Mesh networking applications
- 2 to 6 GHz wireless applications
- Point to multi-point systems
- Base station antennas
- WiFi access points
- WiMax base stations

SPECIFICATIONS

PARAMETER	SPECIFICATIONS
Model	OF84005-FNF
Frequency Bands, MHz	840-870
Peak Gain, dBi (Avg)	5.3
Peak Gain, dBi (Max)	5.4
VSWR, Avg	1.3:1
VSWR, Max	1.8:1
Nominal Impedance	50 Ω
Polarization	Vertical
Azimuth 3 dB Beamwidth	360°
Elevation 3 dB Beamwidth	26°
Max Power (Ambient 25°C)	50 Watts

PARAMETER	SPECIFICATIONS
RF Connector	Fixed Type N female
Antenna Dimension (L x Dia)	629 x 25.4 mm (27.2 in. x 1.0 in.)
Weight	0.79 kg (1.7 lbs)
Antenna Color	White
Radome	Fiberglass
Wind Operational	161 km/h (100 mph)
Wind Survival	266 km/h (136 mph)
Operating Temperature	-40°C to +70°C (-40°F to +158°F)
Storage Temperature	-40°C to +85°C (-40°F to +185°F)
Ingression Protection	IP67
Material Substance Compliance	RoHS

RADIATION PATTERNS

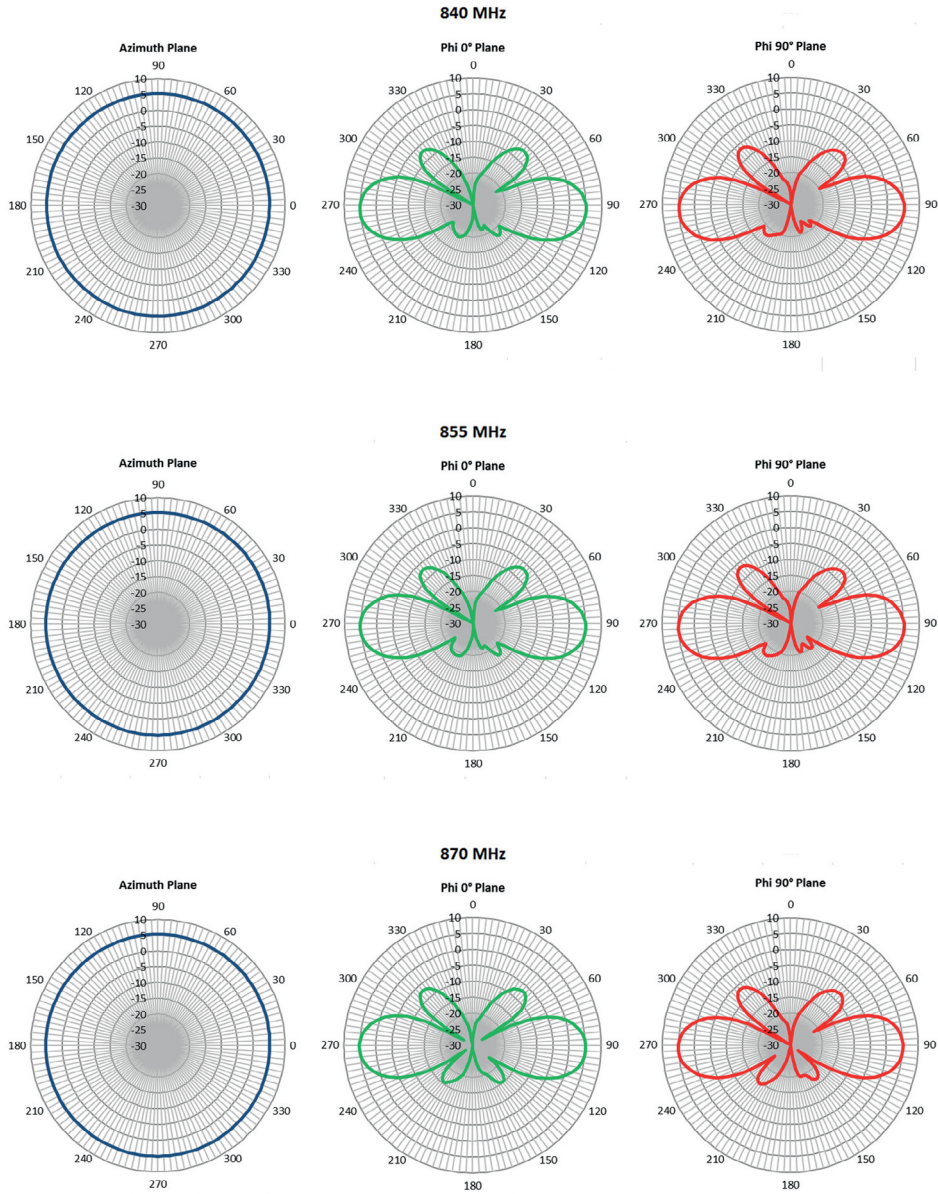

te.com

TE, TE Connectivity, TE connectivity (logo), and EVERY CONNECTION COUNTS are trademarks owned or licensed by the TE Connectivity plc family of companies. Other product names, logos, and company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, complete, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES REGARDING THE INFORMATION CONTAINED HEREIN, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. In no event will TE be liable for any direct, indirect, incidental, special or consequential damages arising from or related to recipient's use of the information. It is the sole responsibility of recipient of this information to verify the results of this information using their engineering and product environment. Recipient assumes any and all risks associated with the use of the information. Antenna performance may vary. TE is a component manufacturer, and customer and/or end-user is responsible for all end-use compliance and regulatory requirements.

©2025 TE Connectivity. All Rights Reserved.

06/25 Original

TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015