

Current transformer - PACT MCR-V2-4012- 70- 400-5A-1 - 2277129

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Window-type current transformer, 400 A AC primary current; 5 A AC secondary current; accuracy class 1; 7.5 VA rated power



Key Commercial Data

Packing unit	1 pc
GTIN	
GTIN	4046356305075
Weight per Piece (excluding packing)	360.000 g
Custom tariff number	85043129
Country of origin	Germany

Technical data

Dimensions

Width	30 mm
Width with alternative assembly	70 mm
Height	90 mm
Height with alternative assembly	90 mm
Depth	70 mm
Depth with alternative assembly	30 mm
Primary round conductor (diameter)	33 mm
Primary round conductor (width)	40 mm
Primary round conductor (height)	12 mm
Note on dimensions	2
Primary round conductor (width)	30 mm

Current transformer - PACT MCR-V2-4012- 70- 400-5A-1 - 2277129

Technical data

Dimensions

Primary round conductor (height)	10 mm
----------------------------------	-------

Ambient conditions

Ambient temperature (operation)	-25 °C ... 40 °C
Ambient temperature (storage/transport)	-25 °C ... 40 °C
Maximum altitude	≤ 1000 m
Permissible humidity (operation)	Use only indoors, non-condensing

General

Converter type	Plug-on converters
Accuracy class	1
Can be calibrated	no
Color	black
Housing material	PA 6.6

Input data

Thermal rated short-time current	$I_{th} = 60 * I_n$
Thermal rated continuous current	$I_d = 1.2 * I_n$
Rated surge current	$I_{dyn} = 2.5 * I_{th}$
Rated frequency: Standard converter	50 Hz ... 60 Hz
Rated frequency: Calibrated converter	50 Hz
Surge current limitation factor	FS 5
Rated power	7.5 VA
Primary rated current I_{pn}	0 A ... 400 A
Secondary rated current I_{sn}	5 A AC

Connection data

Connection method	Screw connection
Conductor cross section flexible	2x 2.5 mm ² ... 4 mm ² ()

Standards and Regulations


Standards/regulations	EN 50178
	EN 61869
Rated insulation voltage	1 kV (Phase/neutral conductor)
UL, USA/Canada	XODW8.E323953

Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Current transformer - PACT MCR-V2-4012- 70- 400-5A-1 - 2277129

Drawings

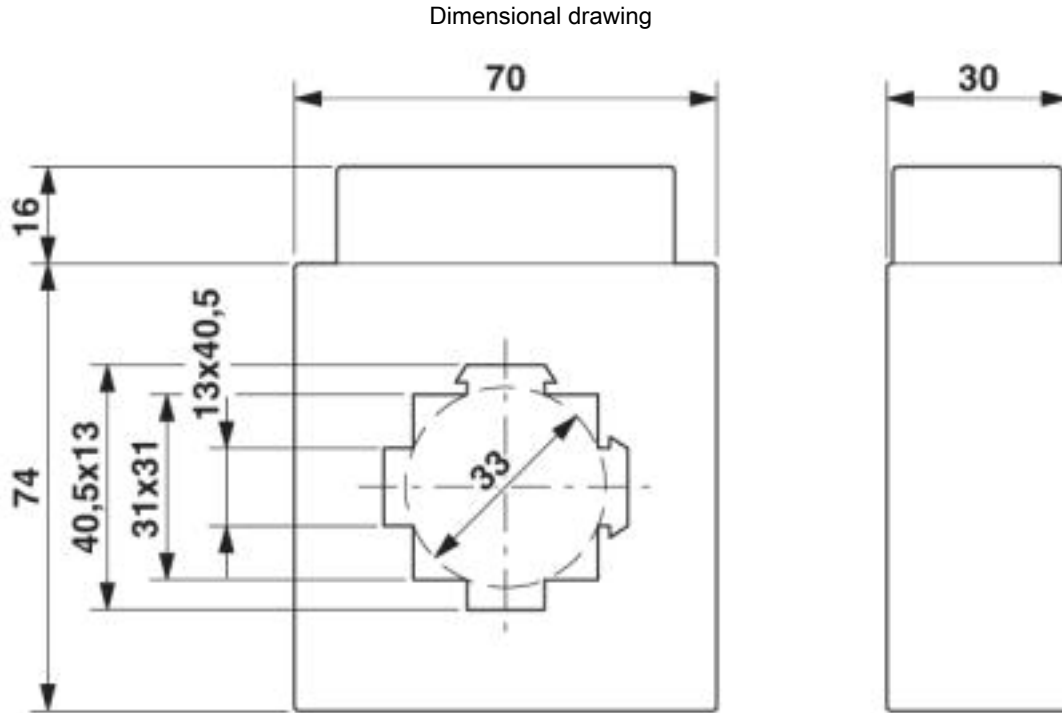

Classifications

eCl@ss

eCl@ss 4.0	27210900
eCl@ss 4.1	27210900
eCl@ss 5.0	27210900
eCl@ss 5.1	27210900
eCl@ss 6.0	27210900
eCl@ss 7.0	27210902
eCl@ss 8.0	27210902
eCl@ss 9.0	27210902

ETIM

ETIM 3.0	EC002048
ETIM 4.0	EC002048
ETIM 5.0	EC002048
ETIM 6.0	EC002048
ETIM 7.0	EC002048

Current transformer - PACT MCR-V2-4012- 70- 400-5A-1 - 2277129

Classifications

UNSPSC

UNSPSC 6.01	30211501
UNSPSC 7.0901	39121019
UNSPSC 11	39121006
UNSPSC 12.01	39121006
UNSPSC 13.2	39121032

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC		RU C- DE.A*30.B.01082
-----	--	--------------------------

Accessories

Accessories

Mounting material

Mounting material - PACT-FAST-MNT-W13-L65 - 2276625



The transformer quick-action mechanism enables the lightning-fast mounting of PACT current transformers on the power rail. The installation can be completed easily by hand without the use of tools. Fixing pins: 65 mm, holding latches: 13 mm

Current transformer - PACT MCR-V2-4012- 70- 400-5A-1 - 2277129

Accessories

Mounting material - PACT-FAST-MNT-W13-L40 - 2276612



The transformer quick-action mechanism enables the lightning-fast mounting of PACT current transformers on the power rail. The installation can be completed easily by hand without the use of tools. Fixing pins: 40 mm, holding latches: 13 mm