

PT-15 / PTC-15

15-mm carbon / cermet through-hole potentiometer

The PT-15 (carbon) and PTC-15 (cermet) potentiometers offer control where frequent adjustment is required. The shaftless design allows for employment of different engagement mechanisms, such as a customized shaft, a motor control or a human interface adjustment. This potentiometer can also control variable outputs including frequency, change in motor speed or volume.



KEY FEATURES

- ▶ Excellent performance (up to 3% linearity)
- ▶ Carbon or cermet resistive element
- ▶ Up to 38 mechanical detents for tactile feedback
- ▶ Up to 100.000 life cycles
- ▶ IP54 protection
- ▶ Magazine packaging for automatic insertion available
- ▶ Polyester / Alumina substrate
- ▶ Wiper positioned at initial, 50% or fully clockwise
- ▶ Loose and assembled shaft and knobs
- ▶ Linear, logarithmic and antilogarithmic tapers
- ▶ Self extinguishable plastic (UL 94V-0) available
- ▶ SPDT switch and low torque version available

ELECTRICAL SPECIFICATIONS

	PT-15	PTC-15
Taper ¹	Lin, Log, Alog	
Range of values ¹	(Decad. 1.0 - 2.0 - 2.2 - 2.5 - 4.7 - 5.0)	
Lin	100Ω ≤ Rn ≤ 5MΩ	
Log, Alog	1KΩ ≤ Rn ≤ 5MΩ	
Tolerance ¹		
100Ω ≤ Rn ≤ 1MΩ	± 20%	
1MΩ < Rn ≤ 5MΩ	± 30%	
Max. Voltage		
Lin	250 VDC	
Log, Alog	125 VDC	
Nominal power	50°C (122°F)	70°C (158°F)
Lin	0.25 W	0.50 W
Log, Alog	0.12 W	0.25 W
Residual resistance ¹	≤ 0.5% Rn (5Ω min.)	
Equivalent noise resistance	≤ 3% Rn (3Ω min.)	
Operating temperature	-25°C to +70°C ² [-13°F to + 158°F]	-40°C to +90°C ³ [-40°F to + 194°F]

¹ Others available on request

² Up to 85°C depending on application.

³ +120°C/+248°F upon request

APPLICATIONS

- ▶ Appliance program selection
- ▶ Thermostat adjustment
- ▶ Timer and control relays
- ▶ Consumer electronics
- ▶ Power tool controls
- ▶ Test and measurement equipment

PT-15 / PTC-15

15-mm carbon / cermet through-hole potentiometer

MECHANICAL SPECIFICATIONS

	PT-15	PTC-15
Mechanical rotation angle ¹	265° ± 5°	
Electrical rotation angle	240° ± 20°	
Torque Rotational Stop	0.5 to 2.5 Ncm (0.7 to 3.4 in-oz) > 10 Ncm (>14 in-oz)	
Life ²	Up to 100k cycles	Up to 10k cycles

¹ 240° ± 5° available upon request. Endless rotation available: ST-15; ² Others check availability


ENVIRONMENTAL TESTING

	Test method (CEI 393-1)	PT-15 ΔR[%] - Piher typical test results	PTC-15 ΔR[%] - Piher typical test results
Electrical life	1.000h at 50°C; 0.15W 1.000h at 70°C; 0.33W	±5% n/a	n/a ±2%
Mechanical life	1000 cycles at 10 to 15 cpm	±3 % (Rn < 1M)	±2%
Temperature coefficient	-25°C; +70°C -40°C; +90°C	±300 ppm/°C (Rn < 100K) n/a	n/a ±100 ppm/°C (Rn < 100K)
Thermal cycling	16h at 85°C and 2h at -25°C 16h at 90°C and 2h at -40°C	±2.5% n/a	n/a ±2%
Damp heat	500h at 40°C and 95% relative humidity (RH)	±5%	±2%
Vibration	2h each plane at 10Hz - 55Hz	±2%	±2%
Storage	6 month at 23°C ±2°C and 50% RH	±2.5%	±2%


Out of range values may not comply with these results. Standard test conditions: temperature: 23°C ±2°C and 45% to 70% RH

RECOMMENDED CONNECTIONS

Recommended connection circuit for a position sensor or control application (voltage divider circuit electronic design).



POWER RATING CURVE

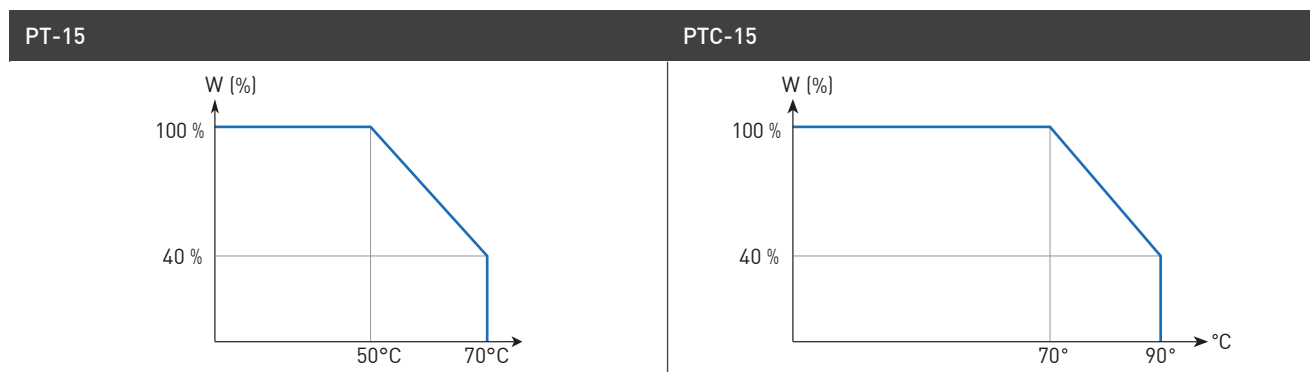

PT-15 / PTC-15

15-mm carbon / cermet through-hole potentiometer

HOW TO ORDER

Carbon potentiometer (Example: PT15LH01-223A2020-S)

PT15

Series

L
N
G
M
C
F
R
T
W
X
Y
Z

inserted shaft

inserted knob

Rotors¹

Mounting method²

H01
H05

horizontal adjust

H02
H06
H10

crimped terminals

V02
V12
V15
V17
V18
V20
V24

vertical adjust

V21
V22
V23

crimped terminals

Ω-Value³

101 = 100Ω
201 = 200Ω
...

504 = 500KΩ
505 = 5MΩ

Taper

A = lin.
B = log.
C = alog.

Tolerance⁴

0505 = ±5%
0707 = ±7%
1010 = ±10%
2020 = ±20%
3030 = ±30%
XXYY = +XX -YY%

Optional features

Cut track

[empty]

PCI
PCF

Detents

[empty]

PAI
PAM
PAF
P11
P1F
P02
...
P38

Shaft/Thumbwheel

[empty] = none

01 = Fig.1
02 = Fig.2
...
28 = Fig.28

Shaft/Knob color

[empty]

IN = not colored (natural)
NE = black
CR = cream

Flammability⁶

[empty] = standard

I = non-flammable

Life⁵

[empty] = 1K cycles
E = 10K cycles
U = 100K cycles

Packaging⁸

[empty] = bulk
T = magazines
R = embossed tape

Torque⁷

[empty] = standard

L ≤ 1.5 Ncm

Wiper position

[empty] = initial
PM = 50%
PF = final

S

check inventory

Cermet potentiometer (Example: PTC15LH01-223A2020)

PTC15

Series

L
N
G
M
C
F
R
T
W
X
Y
Z

inserted shaft

inserted knob

Rotors¹

Mounting method

H01
H05

horizontal adjust

H02
H06
H10

crimped terminals

V02
V12
V15
V17
V18
V20
V24

vertical adjust

V21
V22
V23
V25

crimped terminals

Ω-Value³

101 = 100Ω
201 = 200Ω
...

504 = 500KΩ
505 = 5MΩ
000 = CM

Taper

A = lin.
B = log.
C = alog.

Tolerance⁴

0505 = ±5%
0707 = ±7%
1010 = ±10%
2020 = ±20%
3030 = ±30%
XXYY = +XX -YY%

Optional features

Detents

[empty]

PAI
PAM
PAF
P11
P1F
P02
...
P38

Shaft/Thumbwheel

[empty] = none

01 = Fig.1
02 = Fig.2
...
28 = Fig.28

Shaft/knob color

[empty] = cream

NE = black

Packaging⁸

[empty] = bulk
T = magazines
R = embossed tape

Torque⁷

[empty] = standard

L ≤ 1.5 Ncm

Wiper position

[empty] = initial
PM = 50%
PF = final

Life

[empty] = 1K cycles
E = 10K cycles

check inventory

1. Rotors: "Z" adjustment only available on "H"-mounting versions. Color for "T" rotor is Orange.
2. Mounting method: "V24" terminals material: brass.
3. Ω- Value: XXX - First two digits of Ω-value 000 = CM = 45° switch SPDT version
 XXX - Number of zeros

4. Tolerance: for custom tolerance please check availability: info@piher.net
5. Life: "U" only available for low-torque versions and to be studied case by case.
6. Non-flammable according to UL 94V-0: housing, rotor and shaft. PTC-15 made of non-flammable material by standard.
7. Torque: Detent option not available with low torque models.
8. Packaging: Magazine packaging available for all H and V12, V02, V21, V15 and V23 mounting.

PIHER *sensing* systems

www.piher.net

Amphenol Sensors

Page 3 of 10

PT-15 / PTC-15

15-mm carbon / cermet through-hole potentiometer

DEFAULT CONFIGURATION

	PT-15	PTC-15
Life	1.000 cycles	
Cut track	no	n/a
Detents	none	
Packaging	bulk	
Shaft/thumb wheel	none	
Non-flammability	no	yes
Housing color	black	cream
Rotor color	white	cream
Shaft/knob/thumbwheel color (if applicable)	Not colored (natural)	cream
Wiper Position	initial	
Torque	0.5 to 2.5 Ncm	
Terminal material	steel	brass
Linearity	not controlled	

ROTORS

Wiper shown at initial position

L Screw driver - through hole	N Removable shaft or thumbwheel	G Removable shaft or thumbwheel

Wiper shown positioned at 50%

M Hexagonal - through hole	C	F	R	T

With inserted shaft

With inserted thumbwheel

W Adjustable from terminal side	X Adjustable from collector side	Y Adjustable from terminal side	Z Adjustable from collector side

Default delivery is at initial position.



Download the STEP files here:
www.piher.net


PT-15 / PTC-15

15-mm carbon / cermet through-hole potentiometer


MOUNTING METHOD

Horizontal adjust / vertical mounting


H01 - 2.5mm / H02 with crimped terminals

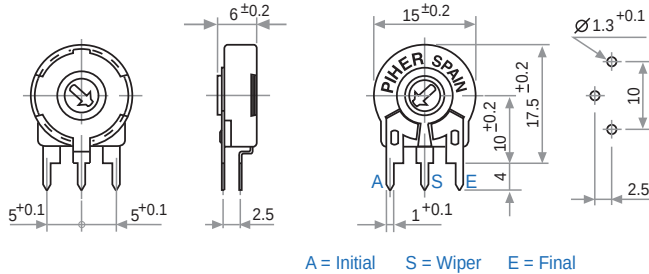


H05 - 5mm / H10 with crimped terminals

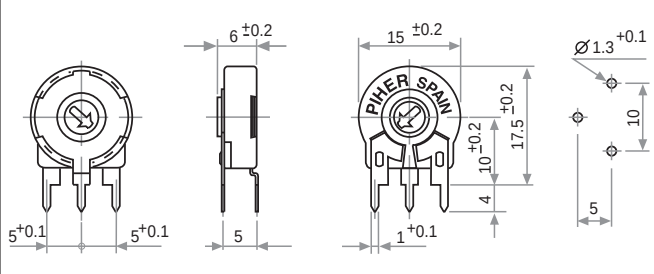

H06 - B

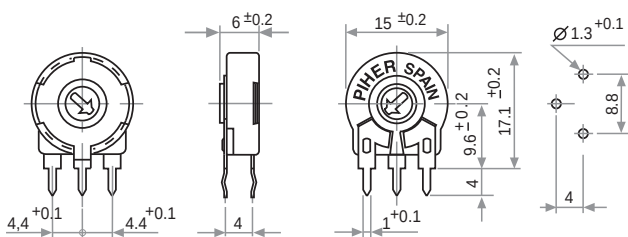


Available on request

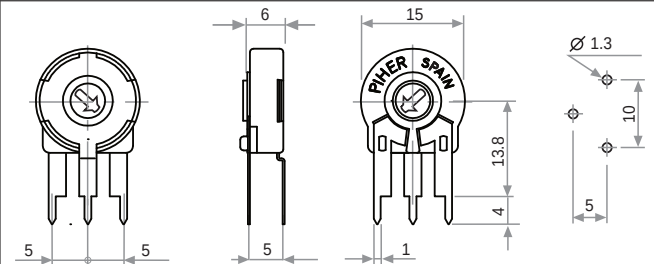


Vertical adjust / horizontal mounting


V02 - 12.5mm / V21 with crimped terminals

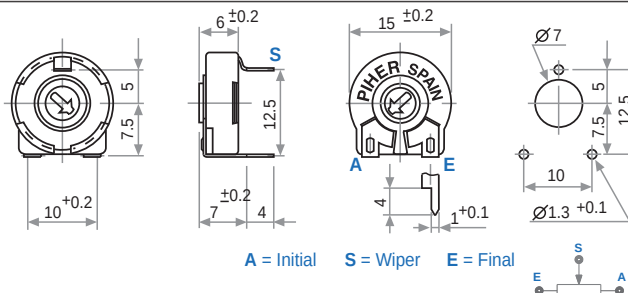


V12 - 12.5mm / V22 with crimped terminals

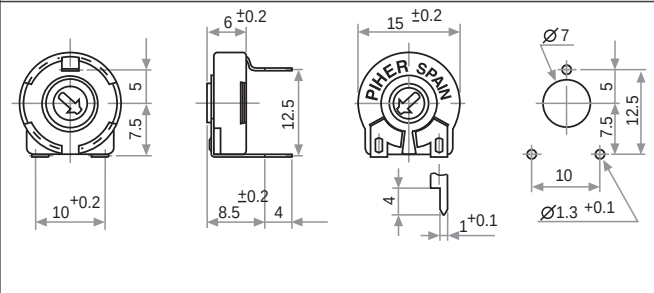

V15 - 15mm / V23 with crimped terminals

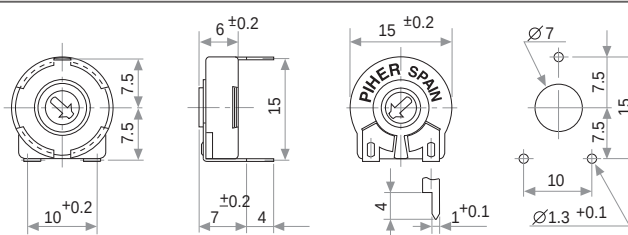

V20 - 15mm (L)

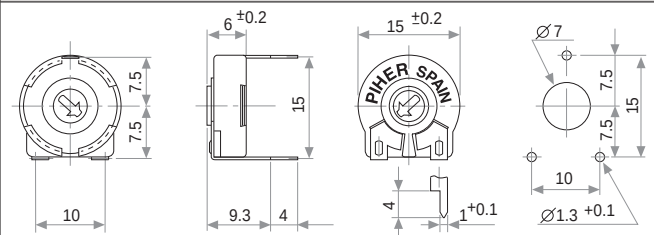


PT-15 / PTC-15

15-mm carbon / cermet through-hole potentiometer


MOUNTING METHOD

Vertical adjust / horizontal mounting



V17 - 17.5mm / V25 with crimped terminals

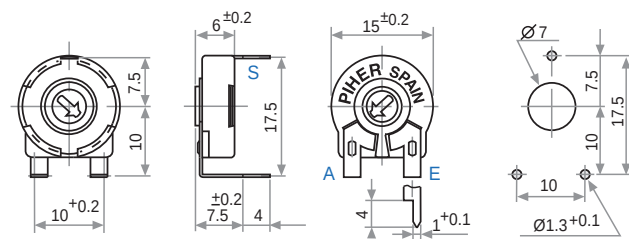


V18 - 18.5mm [D]

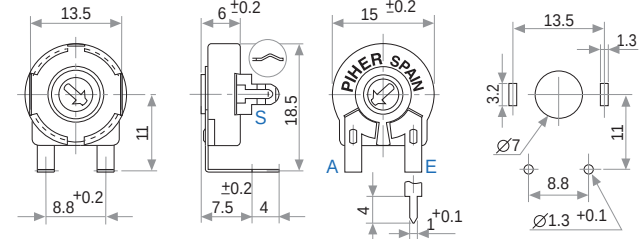

V24 - 15mm [D15]

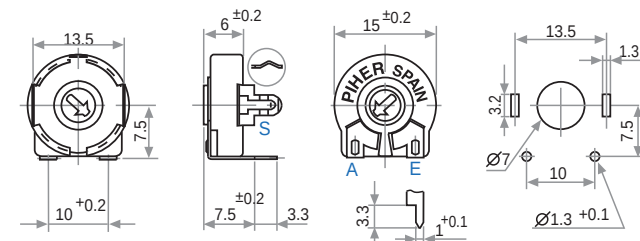


CRIMPED TERMINALS (DETAIL)

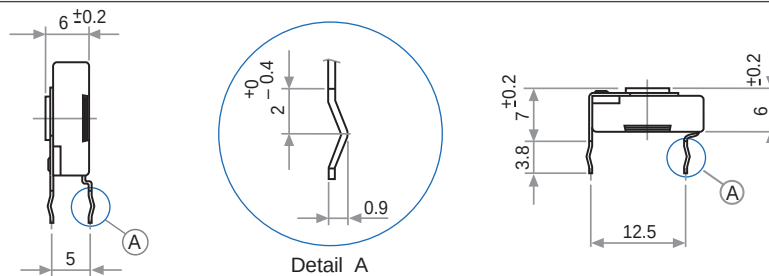


STANDARD RESISTANCE-VALUES AND TOLERANCES

Resistance Ω	100	200	220	250	470	500	1K	2K	2.2K	2.5K	4.7K	5K	10K	20K	22K	25K	47K	50K	100K	200K	220K	250K	470K	500K	1M	2M	2.5M	4.7M	5M
Order Code	101	201	221	251	471	501	102	202	222	252	472	502	103	203	223	253	473	503	104	204	224	254	474	504	105	205	255	475	505
Tolerance	20%																									30%			

SWITCH VERSIONS AVAILABLE WITH OR WITHOUT DETENTS

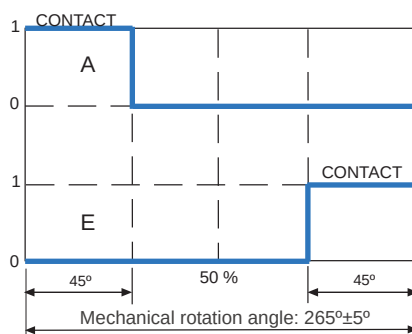

Standard Specification
 Power rating: 24V / 15mA
 ON position resistance: $\leq 5\Omega$
 Insulation resistance: $\geq 30M\Omega$



Contact Piher Sensing Systems for ordering information.

PT-15 / PTC-15

15-mm carbon / cermet through-hole potentiometer

TAPERS

Standard	Example: special custom taper
A = Linear B = Log. C = Alog.	

For more information on custom tapers contact Piher Sensing Systems.

CUT TRACKS (OPEN CIRCUIT DESIGN)

PCI	PCF
CCW on-of (A) Cut track at the beginning of travel.	Cut track at the end of travel. CW on-of (E)

Other configurations available upon request. Cut Track not available for PTC-15.

DETENTS

PAM	P1i	P1F	P02	P03	P04	P05	P06	P07	P08
P09	P10	P11	P12	P13	P16	P17	P27	P34	P38
PAI			PAF			PID		PFD	
Wiper position B = 34.5° (wiper positioned at initial)			Wiper position B = 34.5° (wiper positioned at final)			A = 32.625°		A = 32.625°	


— Relative detent positions along total mechanical travel

- Standard mechanical life is 500 cycles.
- Long life versions are available upon request and have the following characteristics at T^a: Potentiometers with 1 to 3 detents up to 10K cycles; Potentiometers with 4 and more detents up to 5K cycles.
- Please consult Piher Sensing Systems if unique non-overlapping values at each detent position or LOG/ALOG tapers are required.
- Different output voltage values can be matched at each detent position (see next section).
- Detent torque can vary from 1.2 to 2.5 times the standard potentiometer torque. For all detents versions of more than 13 detents the detent torque will be 0.5 to 3.5 Ncm.
- For V18 and V24 mounting detent configuration will be studied case by case.
- For more than 13 detents versions please contact Piher Sensing Systems.


PT-15 / PTC-15

15-mm carbon / cermet through-hole potentiometer

STEPPED OUTPUTS / CONSTANT VALUE ZONES

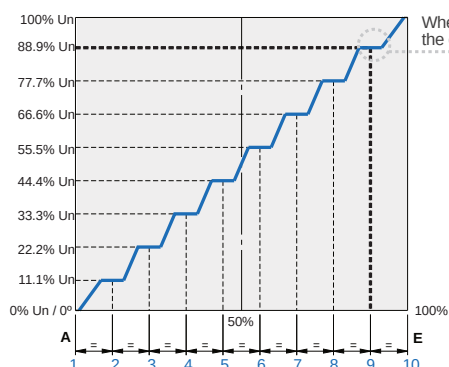

When the potentiometer's wiper is located at detent n°9, the output voltage will be 88.9% Un $\pm$ % tolerance.




IMPROVED REPEATABILITY

Constant value zones can be combined with strategically located mechanical detents to provide exact alignment between the electrical output (flat areas) and the mechanical detent position. This provides clear mechanical positions that are not only repeatable, but perfectly aligned electrical outputs at each of the (detent) angles. The detents also prevent output values from changing due to vibration or accidental rotor movements. The result is a higher level of precision in controlling lighting, temperature, motor or other electronic control systems.

Contact Piher Sensing Systems for ordering information.

POSITIONING



Special delivery positions available on request.

PACKAGING

Bulk














Dimensions (mm): 185x85x80

Without shaft: 400 units per box
With thumbwheel: 200 units per box
With shaft: contact Piher Sensing Systems

PT-15 / PTC-15

15-mm carbon / cermet through-hole potentiometer

SHAFTS AND THUMBWHEELS (TOP VIEW, FOR N, G AND T ROTOR TYPES)

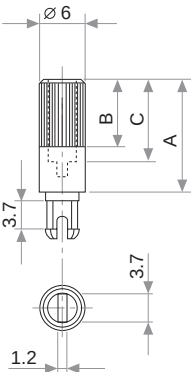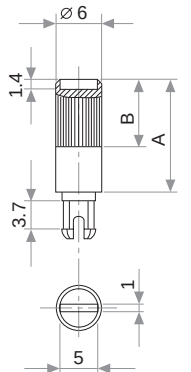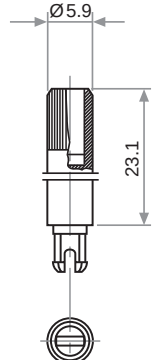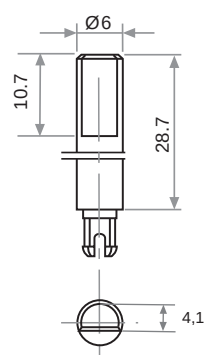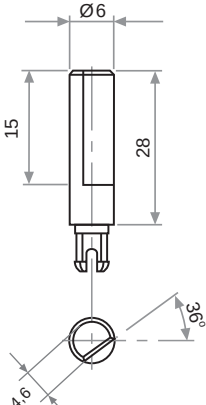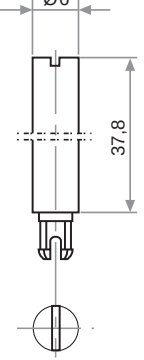Hollow shafts models			Solid shafts models																																																				
	<table><tr><th>Fig.</th><th>Ref.</th><th>A</th><th>B</th><th>C</th></tr><tr><td>1</td><td>5272</td><td>12</td><td>9</td><td>8</td></tr><tr><td>2</td><td>5214</td><td>19</td><td>9</td><td>15</td></tr><tr><td>5</td><td>5208</td><td>9.5</td><td>6.5</td><td>5.5</td></tr><tr><td>9</td><td>5216</td><td>35</td><td>9</td><td>31</td></tr><tr><td>11</td><td>5209</td><td>35</td><td>25</td><td>31</td></tr></table> A = Length measured from rotor surface B = Knurling length C = Hollow depth	Fig.	Ref.	A	B	C	1	5272	12	9	8	2	5214	19	9	15	5	5208	9.5	6.5	5.5	9	5216	35	9	31	11	5209	35	25	31			<table><tr><th>Fig.</th><th>Ref.</th><th>A</th><th>B</th></tr><tr><td>6</td><td>5219</td><td>15</td><td>9</td></tr><tr><td>7</td><td>5220</td><td>16.8</td><td>9</td></tr><tr><td>8</td><td>5207</td><td>25.3</td><td>9</td></tr><tr><td>12</td><td>5227</td><td>46</td><td>5</td></tr></table> Slot (1 x 1.4) perpendicular to wiper position. Fig. 12 slot is on line with wiper position.	Fig.	Ref.	A	B	6	5219	15	9	7	5220	16.8	9	8	5207	25.3	9	12	5227	46	5	
Fig.	Ref.	A	B	C																																																			
1	5272	12	9	8																																																			
2	5214	19	9	15																																																			
5	5208	9.5	6.5	5.5																																																			
9	5216	35	9	31																																																			
11	5209	35	25	31																																																			
Fig.	Ref.	A	B																																																				
6	5219	15	9																																																				
7	5220	16.8	9																																																				
8	5207	25.3	9																																																				
12	5227	46	5																																																				
Fig. 3 - Ref. 5372	Fig. 15 - Ref. 5217	Fig. 17 - Ref. 5210	Fig. 18 - Ref. 5271	Fig. 19 - Ref. 6032*	Fig. 20 - Ref. 5369*																																																		
																																																							
Fig. 21 - Ref. 6031*	Fig. 22 - Ref. 6029	Fig. 23 - Ref. 6022	Fig. 29 - Ref. 6162	Fig. 25 - Ref. 6059	Fig. 27 - Ref. 5268*																																																		
																																																							
Fig. 28 - Ref. 6055	Fig. 4 - Ref. 5371																																																						
	Thumbwheel and shafts are delivered unassembled if not specified otherwise in part number code (W, X, Y, Z). The position of the thumbwheel Fig 4 can be indicated in part number code: Initial (default), 50% (PM) or Final (PF), shafts will be delivered at random position by default. Custom specific positions are available for all shafts and thumbwheel on request. The plastic color can be stated in the part number. Non flammable plastic available, if potentiometer is orderer with non-flammable plastic (UL-94V0), the shaft or knob will be delivered with non-flammable plastic. If you wish to use your own plastic shaft/knob/actuator please contact Piher for advice about compatible materials. *Not available in self-extinguishable plastic.																																																						

PT-15 / PTC-15

15-mm carbon / cermet through-hole potentiometer

AVAILABLE PACKAGING OPTIONS

Mounting Type	Terminal Style	Mounting Method	Bulk	Magazine (35 units)	Embossed Tape
Horizontal adjust	Straight	H01	✓	✓	
		H05	✓	✓	
		H06	✓	✓	
	Crimped	H02	✓	✓	
		H10	✓	✓	
Vertical adjust	Straight	V02	✓	✓	✓
		V12	✓	✓	
		V15	✓	✓	✓
		V17	✓		✓
		V18	✓		
		V20	✓		
		V24	✓		
	Crimped	V21	✓	✓	✓
		V22	✓		
		V23	✓	✓	✓
		V25	✓		✓

OUR ADVANTAGE

- ▶ Leading-edge innovative position sensing solutions
 - ▷ Contactless (Hall-effect and Inductive Technology)
 - ▷ Contacting (Potentiometers, Printed Electronics)
- ▶ Engineering design-in support
- ▶ All our products can be customized to fit target application and customer requirement
- ▶ Capability to move seamlessly from development to true high-volume production
- ▶ A global footprint with global engineering and commercial support
- ▶ One-stop shop not limited to position sensors (temperature, pressure, gas,...) through group collaboration
- ▶ Flexibility and entrepreneurship of a medium-sized company with the backing of Amphenol Corporation



For the most up-to-date information, we recommend downloading the latest version of this datasheet from www.piher.net.

Disclaimer:

The product information in this catalog is for reference purposes. Please consult for the most up to date and accurate design information.
 Piher Sensors & Controls S.A., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Piher"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product described herein.
 Piher disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Piher's terms and conditions of sale, including but not limited to the warranty expressed therein, which apply to these products.
 No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Piher.
 The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Piher products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Piher for any damages arising or resulting from such use or sale. Please contact authorized Piher personnel to obtain written terms and conditions regarding products designed for such applications.
 Product names and markings noted herein may be trademarks of their respective owners. Information contained in and/or attached to this catalog may be subject to export control regulations of the European Community, USA, or other countries. Each recipient of this document is responsible to ensure that usage and/or transfer of any information contained in this document complies with all relevant export control regulations. If you are in any doubt about the export control restrictions that apply to this information, please contact the sender immediately. For any Piher Exports, Note: All products / technologies are EAR99 Classified commodities. Exports from the United States are in accordance with the Export Administration Regulations. Diversion contrary to US law is prohibited.

CONTACT

Piher Sensing Systems
 Polígono Industrial Municipal
 Vial T2, N°22
 31500 Tudela
 Spain

sales@piher.net

+34 948 820 450



NEED QUICK HELP?

Our AI Virtual Assistant is available 24/7 to provide instant support—visit chat.piher.info

Rev-101224 © Piher Sensors & Controls S.A.