


Data sheet | Item number: 231-903

Jumper; for conductor entry; 3-way; insulated; gray

www.wago.com/231-903

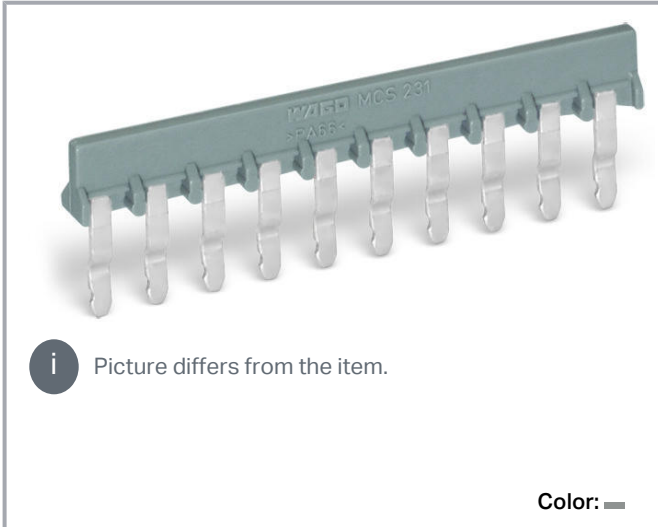

Data

Electrical data

Ratings per IEC/EN

Ratings per	IEC/EN 60664-1
Rated voltage (III/2)	320 V
Rated surge voltage (III/2)	4 kV
Rated current	16 A
Legend (ratings)	(III / 2) $\hat{=}$ Overvoltage category III / Pollution degree 2

Connection data

Pole No.	3
----------	---

Physical data

Pin spacing	5/5.08 mm / 0.197/0.2 inch
Width	15.3 mm / 0.602 inch
Depth	6.15 mm / 0.242 inch

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

Mechanical data

Suitable

for male and female connectors with CAGE CLAMP® connection

Material data


Color	gray
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.007 MJ
Weight	0.7 g

Commercial data

Product Group	3 (Multi Conn. System)
Packaging type	BOX
Country of origin	DE
GTIN	4045454565848
Customs tariff number	85366990990

Approvals / Certificates

Country specific Approvals

Logo	Approval	Additional Approval Text	Certificate name
	CSA DEKRA Certification B.V.	C22.2	1466354

Downloads

Documentation

Additional Information

Technical explanations	2019 Apr 3	pdf 2.0 MB	Download
------------------------	------------	---------------	----------


Environmental Product Compliance

Compliance Search

Subject to changes. Please also observe the further product documentation!

Installation Notes


Installation

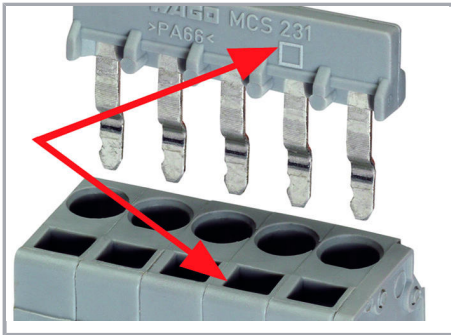

Notice: Insert jumper bar according to direction of symbols.

□ symbol correlates to the direction of the operating slot.

Installation

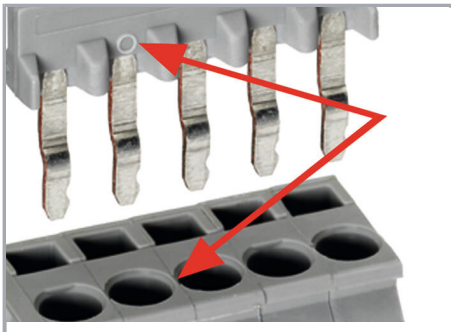


Notice: Insert jumper bar according to direction of symbols.

○ symbol shows direction to conductor entry.

Coding

Subject to changes. Please also observe the further product documentation!

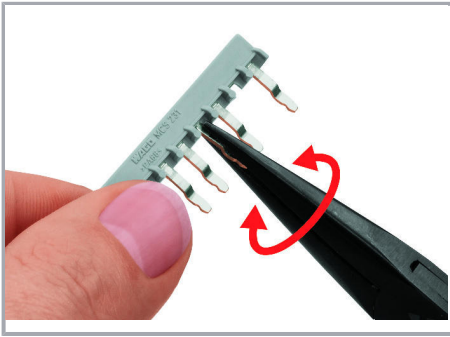


Custom comb-style jumper bars are created by breaking off jumper contacts (3 contacts and more).

Installation



Notice: Comb-style jumper bars reduce the conductor cross-section to 1.5 mm² "s" + "f-st."


Installation

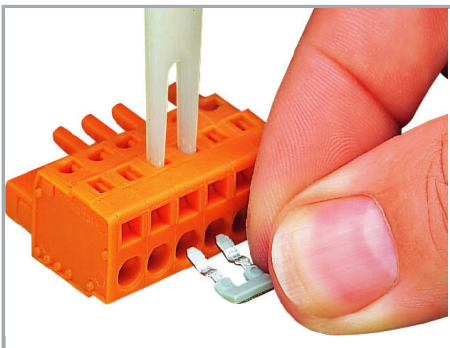

Operating tool for comb-style jumper bars (231-902)

Subject to changes. Please also observe the further product documentation!

Application

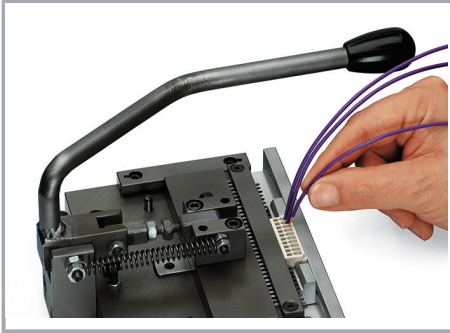

Both male and female connectors can be pre-assembled with comb-style jumper bars upon request.

Subject to changes. Please also observe the further product documentation!