

## ACT20X-SAI-HAO-P

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

### Product image, Similar to illustration



The ACT20X-SAI-HAO/2SAI-2HAO current output isolators are suitable for controlling field devices in Ex areas, up to Zone 0.

The input/output-side HART protocol transparent signal connection is implemented using 4 to 20 mA current loops.

Integrated alarm contacts issue an alert in the event of a malfunction; this makes troubleshooting easier and increases system availability.

The rail-mounted current output isolators are optionally available in one- or two-channel versions.

With 11 mm width per channel, the devices need little space in the electrical cabinet.

### General ordering data

|            |  |
|------------|--|
| Version    | EX signal isolating converter, Safe-input: 4-20mA, Ex output: 4 - 20 mA, 1-channel |
| Order No.  | <a href="#">2456160000</a>   |
| Type       | ACT20X-SAI-HAO-P   |
| GTIN (EAN) | 4050118471564  |
| Qty.       | 1 pc(s).   |

Creation date December 1, 2023 1:22:48 PM CET

Catalogue status 24.11.2023 / We reserve the right to make technical changes.

**ACT20X-SAI-HAO-P****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Dimensions and weights**

|            |          |                 |            |
|------------|----------|-----------------|------------|
| Depth      | 114.6 mm | Depth (inches)  | 4.512 inch |
| Height     | 127.3 mm | Height (inches) | 5.012 inch |
| Width      | 22.5 mm  | Width (inches)  | 0.886 inch |
| Net weight | 189 g    |                 |            |

**Temperatures**

|                     |                            |                       |                |
|---------------------|----------------------------|-----------------------|----------------|
| Storage temperature | -20 °C...85 °C             | Operating temperature | -20 °C...60 °C |
| Humidity            | 0...95 % (no condensation) |                       |                |

**Probability of failure**

|           |                 |                                  |   |
|-----------|-----------------|----------------------------------|---|
| SIL PAPER | SIL certificate | SIL in compliance with IEC 61508 | 2 |
| MTBF      | 135 a           |                                  |   |

**Assembling**

|                   |                        |      |       |
|-------------------|------------------------|------|-------|
| Mounting position | horizontal or vertical | Rail | TS 35 |
|-------------------|------------------------|------|-------|

**Input**

|                  |          |                 |   |
|------------------|----------|-----------------|---|
| Input current    | 4...20mA | Input frequency | 0.5...2.5 kHz @ 3.5...23 mA bi-directional HART® signal |
| Number of inputs | 1        | Voltage drop    | < 2 V   |

**Output**

|                                |                         |                           |   |
|--------------------------------|-------------------------|---------------------------|---|
| 2-wire supply                  | > 14.5 V @ 20 mA        | Cut-off frequency (-3 dB) | 0.5...2.5 kHz @ 3.5...23 mA bi-directional HART® signal |
| Influence of load resistance   | ≤ 0.01% of span / 100 Ω | Load impedance current    | ≤ 725 Ω   |
| Output current                 | 4...20 mA (max. 23 mA)  | Output signal limit       | < 28 mA   |
| Residual ripple (current loop) | < 7.5 mV <sub>eff</sub> | Type                      | intrinsically safe circuit                              |

**Alarm output**

|                |  |                           |   |
|----------------|--|---------------------------|---|
| Alarm function | Signal limit exceeded, Line interruption at the input, No supply voltage, Device error | Continuous current        | ≤ 0,5 A AC / 1 A DC (zone 2)                                      |
| Hysteresis     | 0.1 mA (switching threshold)   | Nominal switching voltage | ≤ 125 V AC / 110 V DC (safe area)<br>≤ 32 V AC / 32 V DC (zone 2) |
| Power rating   | ≤ 62.5 VA / 32 W (safe area)<br>≤ 16 VA / 32 W (Zone 2)                                | Switching thresholds      | 0...29.9 mA (programmable)  |
| Type           | Status relay, 1 NC (voltage-free)  |                           |   |

## ACT20X-SAI-HAO-P

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

### General specifications

|                         |                            |                    |  |
|-------------------------|----------------------------|--------------------|--|
| Accuracy                | < 0.1% span                | Configuration      | With FDT/DTM software,<br>Requires configuration<br>adapter 8978580000<br>CBX200 USB |
| Humidity                | 0...95 % (no condensation) | Power consumption  | ≤ 1.8 W  |
| Protection degree       | IP20                       | Step response time | ≤ 5 ms   |
| Temperature coefficient | <0.01% of span/°C (TU)     | Type of connection | PUSH IN  |
| Voltage supply          | 19.2...31.2 V DC           |                    |  |

### Insulation coordination

|               |                     |                    |                         |
|---------------|---------------------|--------------------|-------------------------|
| EMC standards | DIN EN 61326, NE 21 | Insulation voltage | 2.6 kV (input / output) |
| Rated voltage | 300 V               |                    |                         |

### Data for Ex applications (ATEX)

|               |   |                       |  |
|---------------|---|-----------------------|--|
| Current $I_0$ | 93 mA   | Installation location | Device installed in safe<br>area, zone 2 |
| Marking       | II (1) G [Ex ia Ga] IIC/IIB/<br>IIA, II (1) D [Ex ia Da] IIIC, I<br>(M1) [Ex ia Ma] I | Power $P_0$           | < 650 mW                                 |
| Voltage $U_0$ | 28 V DC   |                       |  |

### Safety-related basic specifications

|  |   |  |                                     |
|--|---|--|-------------------------------------|
| Description of the "safe state"  | analogue Output ≤ 3.6 mA<br>or output ≥ 21 mA | Device type  | A                                   |
| $T_{proof}$  | 5 a   | Total failure rate for safe detected failures<br>( $\lambda_{SD}$ )      | 0 FIT                               |
| Hardware fault tolerance (HFT)   | 0   | Safety category  | SIL 2                               |
| Safe Failure Fraction (SFF)  | 85 %  | Mean Time To Repair (MTTR)   | 24 h                                |
| Total failure rate for safe undetected<br>failures ( $\lambda_{SU}$ )      | 164 FIT                                       | Total failure rate for dangerous detected<br>failures ( $\lambda_{DD}$ ) | 127 FIT                             |
| Total failure rate for dangerous<br>undetected failures ( $\lambda_{DU}$ ) | 48 FIT  | Probability of outage PFH  | $4.8 \times 10^{-8} \text{ h}^{-1}$ |
| Demand mode  | High  |  |                                     |

### Safety-related specifications Low demand mode

|   |   |
|---|---|
| Average Probability of Failure on<br>Demand ( $PFD_{avg}$ ) | $2.29 \times 10^{-4}$ ( $T_{proof} = 1$<br>year), $4.37 \times 10^{-4}$ ( $T_{proof} =$<br>2 years), $1.06 \times 10^{-4}$ ( $T_{proof}$<br>= 5 year) |
|---|---|

**ACT20X-SAI-HAO-P****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Connection data**

|   |                     |   |                     |
|---|---------------------|---|---------------------|
| Type of connection  | PUSH IN             | Wire connection cross section AWG, min.   | AWG 26              |
| Wire connection cross section AWG, max.   | AWG 14              | Wire cross-section, solid, min.   | 0.2 mm <sup>2</sup> |
| Wire cross-section, solid, max.   | 2.5 mm <sup>2</sup> | Wire connection cross section, finely stranded, min.                                    | 0.2 mm <sup>2</sup> |
| Wire connection cross section, finely stranded, max.                                    | 2.5 mm <sup>2</sup> | Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min. | 0.2 mm <sup>2</sup> |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max. | 2.5 mm <sup>2</sup> |   |                     |

**Guarantee**

|               |         |
|---------------|---------|
| Time interval | 3 years |
|---------------|---------|

**Classifications**

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC002653    | ETIM 7.0    | EC002653    |
| ETIM 8.0    | EC002653    | ETIM 9.0    | EC002653    |
| ECLASS 9.0  | 27-21-01-20 | ECLASS 9.1  | 27-21-01-20 |
| ECLASS 10.0 | 27-21-01-20 | ECLASS 11.0 | 27-21-01-20 |
| ECLASS 12.0 | 27-21-01-20 | ECLASS 13.0 | 27210120    |

**Environmental Product Compliance**

|            |                                      |
|------------|--------------------------------------|
| REACH SVHC | Lead 7439-92-1                       |
| SCIP       | 2f6dd957-421a-46db-a0c2-cf1609156924 |

**Approvals**

Approvals



|                         |            |
|-------------------------|------------|
| ROHS                    | Conform    |
| UL File Number Search   | UL Website |
| Certificate no. (cULus) | E337701    |

## ACT20X-SAI-HAO-P

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Technical data

### Downloads

|   |  |
|---|--|
| Approval/Certificate/Document of Conformity | <a href="#">Application notes – Certification SIL</a><br><a href="#">Certification DNV GL</a><br><a href="#">Application notes – Certification ATEX</a><br><a href="#">Application notes – Certification IECEx</a><br><a href="#">Application notes – Certification UL</a><br><a href="#">Declaration of Conformity</a>          |
| Engineering Data                            | <a href="#">CAD data – STEP</a>  |
| Software                                    | <a href="#">WI-Manager, DTM-Library for online installation</a><br><a href="#">Release notes for Weidmueller FDT-DTM Software version</a>  |
| User Documentation                          | <a href="#">Device description – Instruction sheet</a><br><a href="#">Safety Manual for SIL application</a><br><a href="#">Handbuch ACT20X- Serie, deutsch</a><br><a href="#">Manual ACT20X-series, english</a><br><a href="#">20210120 Security Advisory - WI-Manager affected by MundM Software fdtCONTAINER vulnerability</a> |
| Catalogues                                  | <a href="#">Catalogues in PDF-format</a>   |


**ACT20X-SAI-HAO-P**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany


www.weidmueller.com

**Drawings**


**Application**

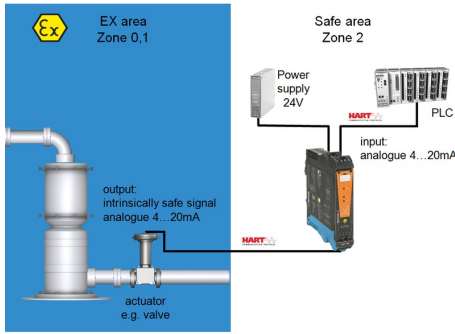


**Block diagram**

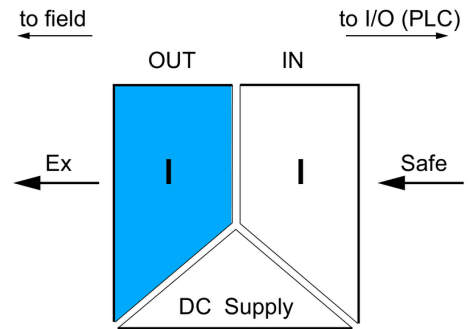


**Dimensioned drawing**

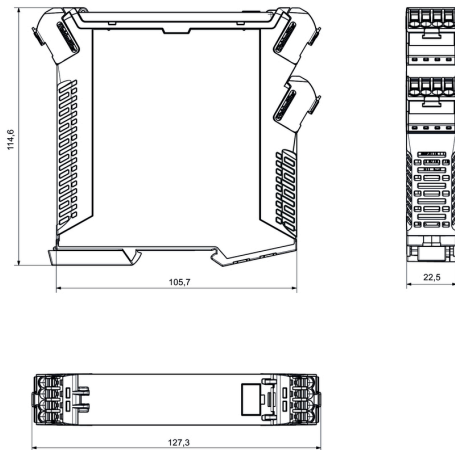

**Similar to illustration**

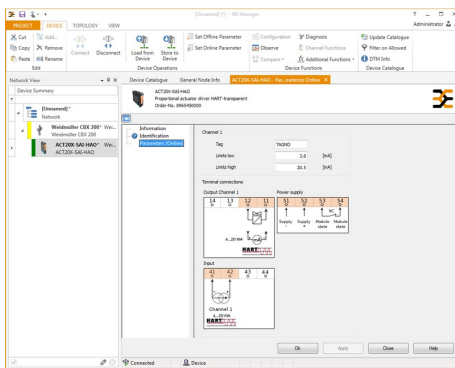

screenshot of configuration with FDT2 / DTM software

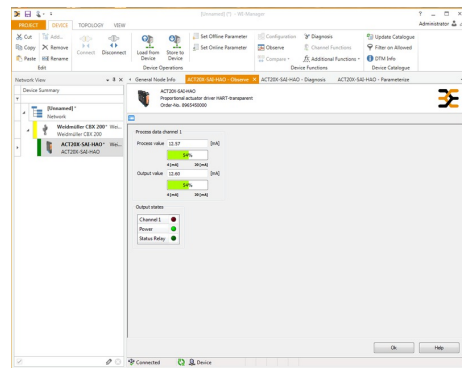

screenshot of "observe" with FDT2 / DTM software

**ACT20X-SAI-HAO-P**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

**Accessories**

**Blank**



ESG is the tried-and-tested marker in MultiCard format for use on many well-known electrical devices. The result is high-quality device marking with a high-contrast appearance.

Various types are available for devices from manufacturers like Siemens, ABB, Beckhoff etc. Advantages at a glance:

- Tags for universal usage, self-adhesive or clip-on tags, depending on type
- For aligned equipment, e.g. circuit breakers, we supply ESG markers for clipping onto tag rails
- Individual laser-quality printing according to specifications

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

**General ordering data**

|            |                            |   |
|------------|----------------------------|---|
| Type       | ESG 6.6/20 BHZ 5.00/04     | Version   |
| Order No.  | <a href="#">1082540000</a> | ESG, Device markers x 20 mm, PA 66, Colour: white |
| GTIN (EAN) | 4032248845439              |   |
| Qty.       | 200 pc(s).                 |   |

**Configuration interfaces**



**General ordering data**

|            |                            |
|------------|----------------------------|
| Type       | CBX200 USB                 |
| Order No.  | <a href="#">8978580000</a> |
| GTIN (EAN) | 4032248813759              |
| Qty.       | 1 pc(s).                   |


**ACT20X-SAI-HAO-P**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

**Accessories**

**Blank**

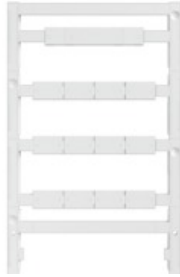

ESG is the tried-and-tested marker in MultiCard format for use on many well-known electrical devices. The result is high-quality device marking with a high-contrast appearance.

Various types are available for devices from manufacturers like Siemens, ABB, Beckhoff etc. Advantages at a glance:

- Tags for universal usage, self-adhesive or clip-on tags, depending on type
- For aligned equipment, e.g. circuit breakers, we supply ESG markers for clipping onto tag rails
- Individual laser-quality printing according to specifications

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

**General ordering data**


|            |                            |   |
|------------|----------------------------|---|
| Type       | ESG 8/13.5/43.3 SAI AU     | Version   |
| Order No.  | <a href="#">1912130000</a> | ESG, Device markers x 13.5 mm, PA 66, Colour: Transparent |
| GTIN (EAN) | 4032248541164              |   |
| Qty.       | 5 pc(s).                   |   |

**ACT20X-SAI-HAO-P**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

**Drawings**

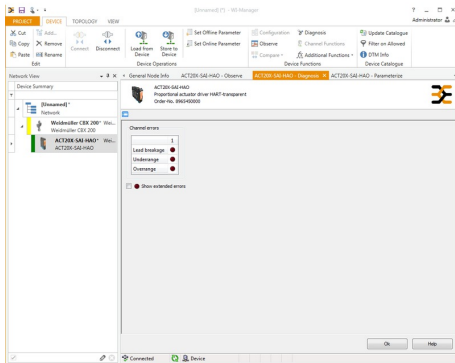

screenshot of "diagnosis" with FDT2 / DTM software

**Connection diagram**

