


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

# GSD

M39012/55B3114

REVISIONS	
ISSUE	CHANGES
5	CN 31540 E REDRAWN KH 12 FEB 90
6	CN 32308 A LNM 21 JUN 90
7	CN 39281 E DCT 6/14/5

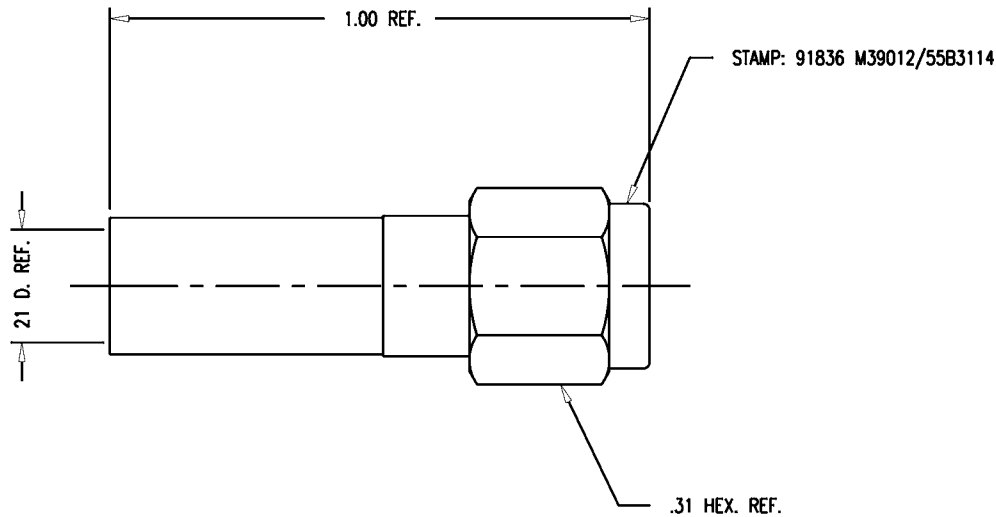

**NOTES:**

- FOR USE WITH M17/28-RG058 CABLE.
- FOR CABLE TRIMMING USE KTJ-78 AND KTD-116.
- FOR CRIMPING USE DIE SIZE KTH-2001.
- FOR CABLING INSTRUCTIONS SEE 3-271.
- MATERIALS:
  - INSULATOR-TEFLON, L-P-403
  - K-GRIP SLEEVE-COM. BRONZE, ALLOY 220
  - GASKET-SILICONE RUBBER, ZZ-R-765
  - C-RING-BER. COP., QQ-C-530
  - CENTER CONTACT-BRASS, QQ-B-626
  - ALL OTHER METAL PARTS-STAINLESS STEEL, 303
- FINISHES:
  - CENTER CONTACT-GOLD PLATE PER MIL-G-45204
  - K-GRIP SLEEVE-KINGS TARNISH RESISTANT FINISH (TR-5)
  - ALL OTHER METAL PARTS-PASSIVATE PER QQ-P-35
- ELECTRICAL CHARACTERISTICS:
  - NOMINAL IMPEDANCE-50 OHMS
  - FREQUENCY RANGE-DC TO 12.4 GHZ
- MARK PACKAGE: KINGS 875-1-3 XXXX (DATE CODE).

SCALE 4:1	
APPROX SURFACE AREA	
875-1-3	
USED ON	
REF:	
SMA PLUG	
DRAWN KH	DATE 12FEB90
DESIGN MJB	DATE 26FEB90
APPR.	DATE

# GSD

<b>KINGS</b> ELECTRONICS CO., INC. TUCKAHOE, NEW YORK 10707	
M39012/55B3114	