


**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0039303056](#)  
**Status:** **Active**  
**Overview:** Mini-Fit Jr. Power Connectors  
**Description:** Mini-Fit Jr.™ Header, Single Row, Right Angle, with Snap-in Plastic Peg PCB Lock, 5 Circuits, PA Polyamide Nylon 6/6, 94V-0, Tin (Sn) Plating

**Documents:**

|  |   |
|--|---|
| <a href="#">3D Model</a>                                     | <a href="#">Product Specification TS-5556-002-001 (PDF)</a>     |
| <a href="#">Drawing (PDF)</a>                                | <a href="#">Application Specification AS-5557-001-001 (PDF)</a> |
| <a href="#">Product Specification PS-45750-001-001 (PDF)</a> | <a href="#">Packaging Specification PK-5569-002-001 (PDF)</a>   |
| <a href="#">Product Specification PS-5556-001 (PDF)</a>      | <a href="#">RoHS Certificate of Compliance (PDF)</a>            |

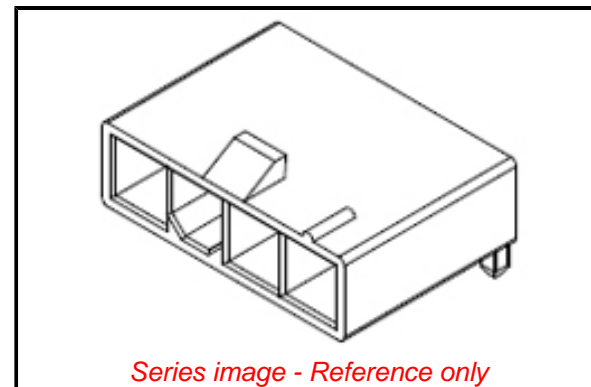

**Agency Certification**

|     |         |
|-----|---------|
| CSA | LR19980 |
| UL  | E29179  |

**General**

|                |  |
|----------------|--|
| Product Family | PCB Headers  |
| Series         | <a href="#">5569</a>   |
| Application    | Power, Wire-to-Board   |
| Comments       | Current = 13A max. per circuit when header is mated to a receptacle loaded with <a href="#">45750</a> Mini-Fit® Plus HCS Crimp Terminal Crimped to 16 AWG wire., See Molex Product specification PS-5556-001 for additional current de-rating information. |
| Overview       | <a href="#">Mini-Fit Jr. Power Connectors</a>  |
| Product Name   | Mini-Fit Jr.™  |
| UPC            | 800754380812   |

**Physical**

|                                |             |
|--------------------------------|-------------|
| Breakaway                      | No          |
| Circuits (Loaded)              | 5           |
| Circuits (maximum)             | 5           |
| Color - Resin                  | Natural     |
| Durability (mating cycles max) | 30          |
| First Mate / Last Break        | No          |
| Flammability                   | 94V-0       |
| Glow-Wire Compliant            | No          |
| Guide to Mating Part           | No          |
| Keying to Mating Part          | None        |
| Lock to Mating Part            | Yes         |
| Material - Metal               | Brass       |
| Material - Plating Mating      | Matte Tin   |
| Material - Plating Termination | Matte Tin   |
| Material - Resin               | Nylon       |
| Net Weight                     | 1.831/g     |
| Number of Rows                 | 1           |
| Orientation                    | Right Angle |
| PCB Locator                    | Yes         |
| PCB Retention                  | Yes         |
| PCB Thickness - Recommended    | 1.78mm      |
| Packaging Type                 | Bag         |
| Pitch - Mating Interface       | 4.20mm      |
| Pitch - Termination Interface  | 4.20mm      |
| Plating min - Mating           | 2.540µm     |
| Plating min - Termination      | 2.540µm     |
| Polarized to Mating Part       | Yes         |

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per - ED/30/2017 (7 July 2017)

**Halogen-Free**

**Status**

**Low-Halogen**

**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
Please visit the [Contact Us](#) section for any non-product compliance questions.

|                 |               |
|-----------------|---------------|
| China ROHS      | Green Image   |
| ELV             | Not Relevant  |
| RoHS Phthalates | Not Contained |

**Search Parts in this Series**

[5569](#) Series

**Mates With**

[39-01-4051](#) Receptacle

|                                |                 |
|--------------------------------|-----------------|
| Polarized to PCB               | Yes             |
| Shrouded                       | Fully           |
| Stackable                      | No              |
| Surface Mount Compatible (SMC) | No              |
| Temperature Range - Operating  | -40°C to +105°C |
| Termination Interface: Style   | Through Hole    |

**Electrical**

|                               |       |
|-------------------------------|-------|
| Current - Maximum per Contact | 13.0A |
| Voltage - Maximum             | 600V  |

**Solder Process Data**

|  |      |
|--|------|
| Duration at Max. Process Temperature (seconds) | 005  |
| Lead-free Process Capability                   | WAVE |
| Max. Cycles at Max. Process Temperature        | 001  |
| Process Temperature max. C                     | 240  |

**Material Info**

|                    |                 |
|--------------------|-----------------|
| Engineering Number | 5569-05A4MS-210 |
|--------------------|-----------------|

**Reference - Drawing Numbers**

|                           |   |
|---------------------------|---|
| Application Specification | AS-5557-001-001   |
| Packaging Specification   | PK-5569-002-001   |
| Product Specification     | PS-45750-001-001, PS-5556-001, RPS-5556-004-001,<br>TS-5556-002-001 |
| Sales Drawing             | SDA-5569-NL*  |

This document was generated on 07/31/2017

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**