




Extract from the online catalog

# MSTB 2,5/22-G

Order No.: 1754834

The figure shows a 10-position version of the product

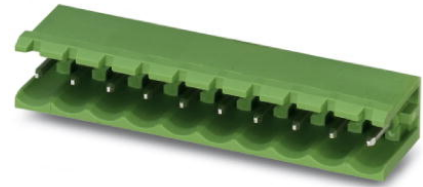

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1754834>

Header, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5 mm, Number of positions: 22, Color: green, Assembly: Soldering

Commercial data	
EAN	4017918029005
Pack	50 pcs.
Customs tariff	85366990
Weight/Piece	0.0091 KG
Catalog page information	Page 166 (CC-2005)

### Product notes

WEEE/RoHS-compliant since: 01/01/2003



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

Dimensions / positions	
Pitch	5 mm
Dimension a	105 mm
Number of positions	22
Pin dimensions	1 x 1 mm
Hole diameter	1.4 mm

MSTB 2,5/22-G Order No.: 1754834  
http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1754834

#### Technical data

Insulating material group	IIIa
Rated surge voltage (III/3)	4 kV
Rated surge voltage (III/2)	4 kV
Rated surge voltage (II/2)	4 kV
Rated voltage (III/2)	320 V
Rated voltage (II/2)	400 V
Connection in acc. with standard	EN-VDE
Nominal current $I_N$	12 A
Nominal voltage $U_N$	250 V
Maximum load current	12 A
Insulating material	PBT
Inflammability class acc. to UL 94	V0

#### Certificates / Approvals



Certification CB, CSA, CUL, GOST, UL, VDE-PZI

#### CSA

Nominal voltage $U_N$	300 V
Nominal current $I_N$	10 A

#### CUL

Nominal voltage $U_N$	300 V
Nominal current $I_N$	10 A


#### UL

Nominal voltage $U_N$	300 V
Nominal current $I_N$	10 A


MSTB 2,5/22-G Order No.: 1754834  
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1754834>

## Drawings

Drilling diagram

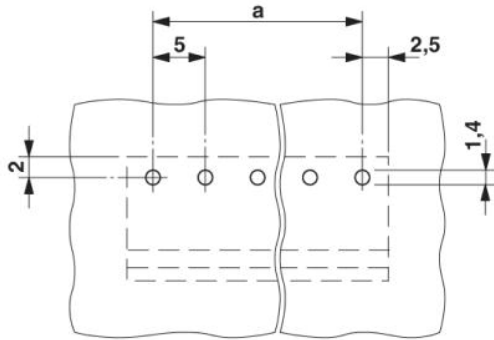

Dimensioned drawing

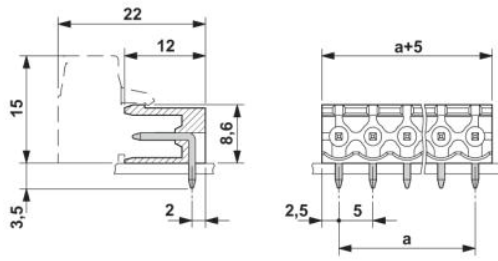

MSTB 2,5/22-G Order No.: 1754834  
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1754834>

---

**Address**

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 00  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2009 Phoenix Contact  
Technical modifications reserved;

onlinecomponents.com